

NETGEAR[®]

BUSINESS

NETGEAR, Inc
408.907.8000
350 E. Plumeria Drive
San Jose, California 95134

Tel: 866-480-2112 Option 2
www.netgear.com/business

Follow us on:

 [Linkedin.com/company/netgear](https://www.linkedin.com/company/netgear)

 [Facebook.com/netgear](https://www.facebook.com/netgear)

NETGEAR[®] | Product Catalog / Volume 18 - 2

NETGEAR[®]

BUSINESS

Product Catalog

End-to-end networking
solutions serving the needs of
small and medium businesses

Volume 18 - 2



DESIGNED WITH YOUR BUSINESS IN MIND

"For more than 20 years, our innovative networking solutions have continually expanded the outer limits of speed, connectivity and intelligence.

We connect the world - whether it be people to people, people to things, or things to things - both inside the smart home or business and outside in the mobile world, to enhance people's lives.

Whether it's in streaming media, securing your home or business, or sharing business-critical data, NETGEAR is creating a new - and better - relationship between you and your world to help you thrive."

Patrick Lo

NETGEAR CEO and Co-founder

As our product portfolio has expanded over the past two decades from Ethernet hubs to switches, advanced WiFi systems, network attached storage and smart home, NETGEAR® is re-imagining how connectivity changes our world in homes and businesses. Simply connecting is no longer enough. Enhancing peoples' lives through the power of intelligent connectivity is the next step in the networking revolution, and NETGEAR is at the center of this change.

NETGEAR Business Solutions are simply designed with your business in mind.

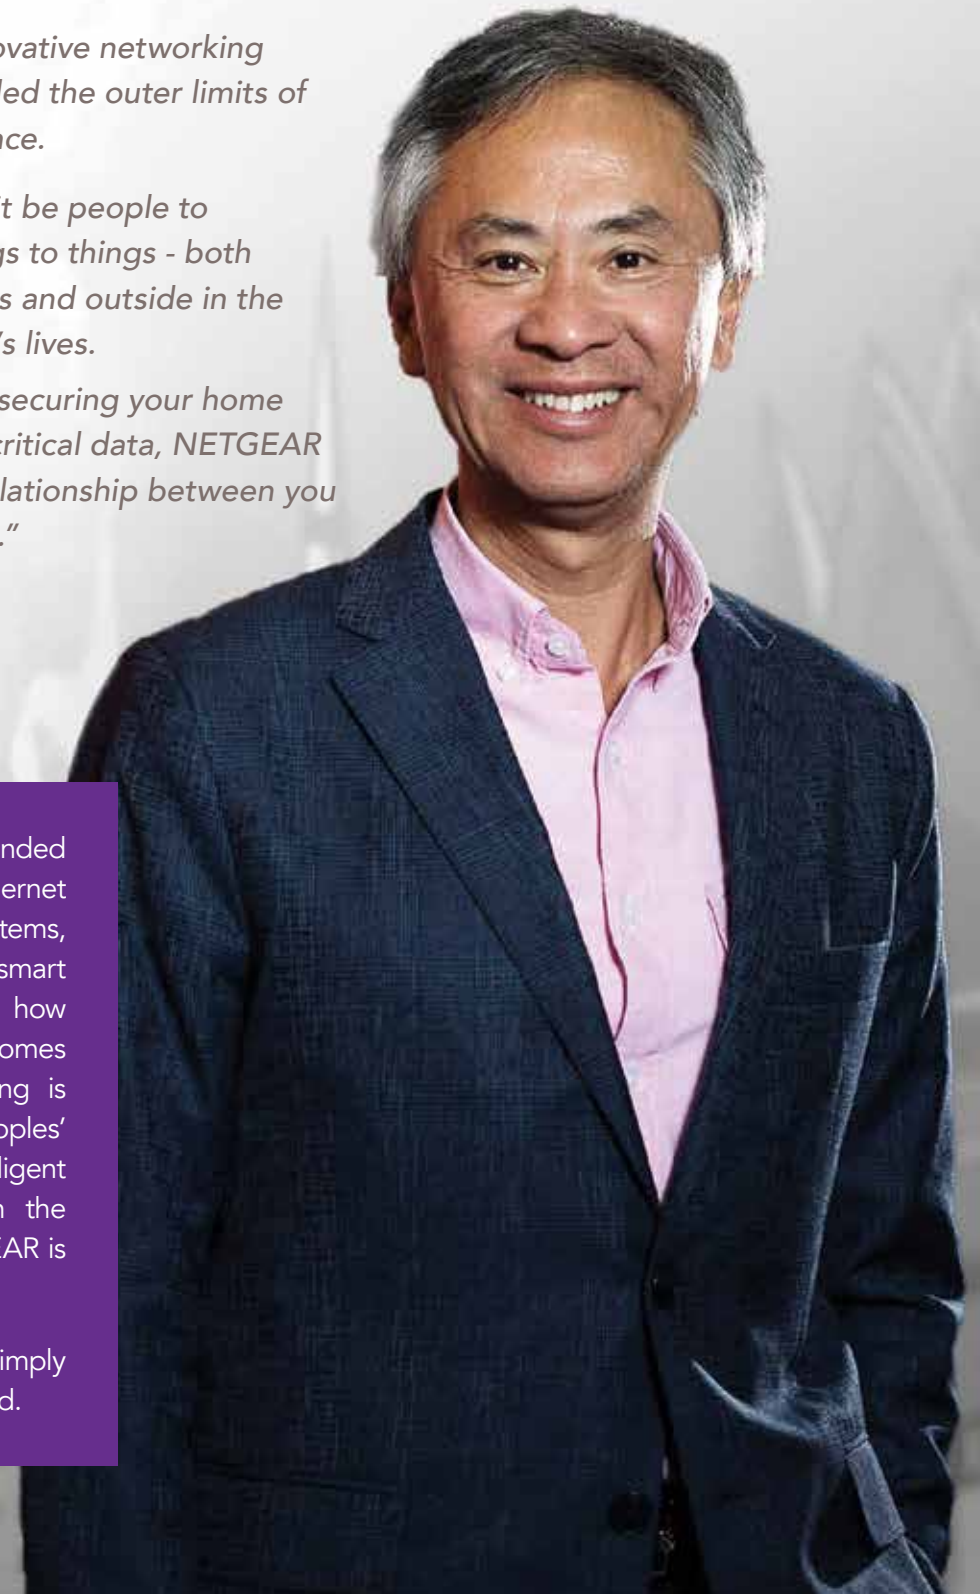




TABLE OF CONTENTS

INTRODUCTION

NETGEAR Portfolio	4
Network Solutions	5

NETGEAR INSIGHT

NETGEAR Insight Management Solution	10
-------------------------------------	----

SWITCHES

Switch Introduction	15
Unmanaged Switches	29
Smart Managed Plus	36
Smart Managed Pro	41
Smart Cloud Switches	51
Fully Managed Switches	53
Modules and Accessories for Switches	60

WIRELESS

Wireless Introduction	63
Wireless Controllers	69
11AC Indoor and Outdoor Access Points	70
11n Indoor and Outdoor Access Points	71
Wireless LAN Antennas and Cables	72

STORAGE

Storage Introduction	74
ReadyNAS Desktop	78
ReadyNAS Rackmount	81
Midmarket Solutions - Backup to Disk	83
Midmarket Solutions - Virtualization	84

LTE MOBILE

LTE Mobile	86
------------	----

SUPPORT

ProSupport for Business	89
-------------------------	----

CONNECTED HOME PRODUCTS

Connected Home Products	94
-------------------------	----

NETGEAR BRINGS THE BEST OF I.T. TO THE CONNECTED OFFICE



Get the most comprehensive and versatile switching portfolio

NETGEAR® offers a unique portfolio of highly flexible and scalable network switches for every business need. From 5 to 144 ports, with Gigabit, Multi-Gigabit or 10-Gigabit copper and/or fiber connectivity, intuitive network management options and advanced L2 and L3 features, comprehensive PoE support and unique form factors (Click, Easy-Mount, Desktop, Rackmount, Chassis), NETGEAR is unrivaled in the switching choice it offers to its business customers.



Unlock your WiFi potential with ultimate speed and coverage

With the latest Wireless AC technology, make a leap forward to an incomparable user experience. Add improved coverage, higher density, increased security and NETGEAR easy management and you will get the smartest wireless solution in the market. NETGEAR wireless access points and controllers offer a unique combination of features for enhanced and affordable coverage, speed, density and reliability.



Experience the highest performing and secure storage

Now faster than ever before, the new ReadyNAS® solutions offer businesses outstanding performance, versatility and scalability with five levels of unrivaled data protection, 10-Gigabit Fiber or Copper Ethernet network interface on select models, and expandable storage capacity, desktop or rackmount.




Network Management made easy

Easy management and setup of your network with NETGEAR management applications and interfaces, including our latest innovative management app - NETGEAR Insight™.

NETWORK SOLUTION FOR SMALL OFFICE AND HOME OFFICE (SOHO) 1-5 USERS


Connection Setup

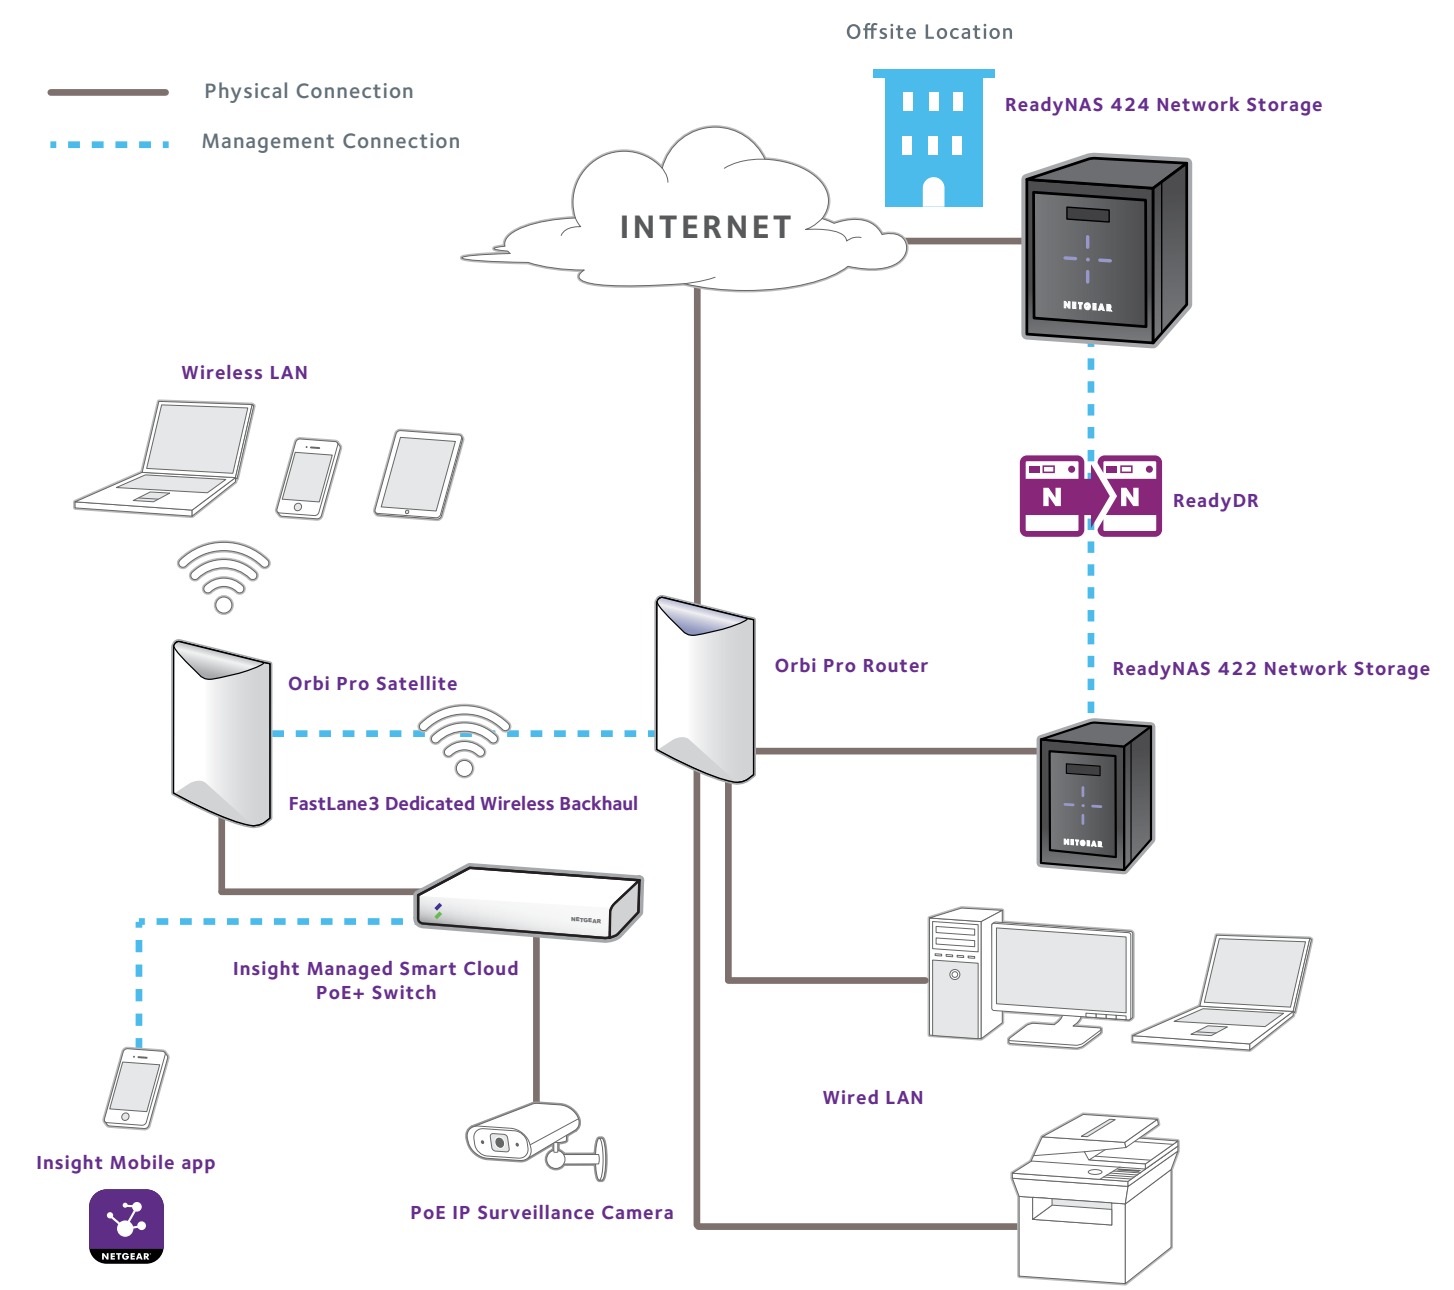




WIRE FREE SOLUTION ORBI PRO, 5-80 USERS

Connection Setup

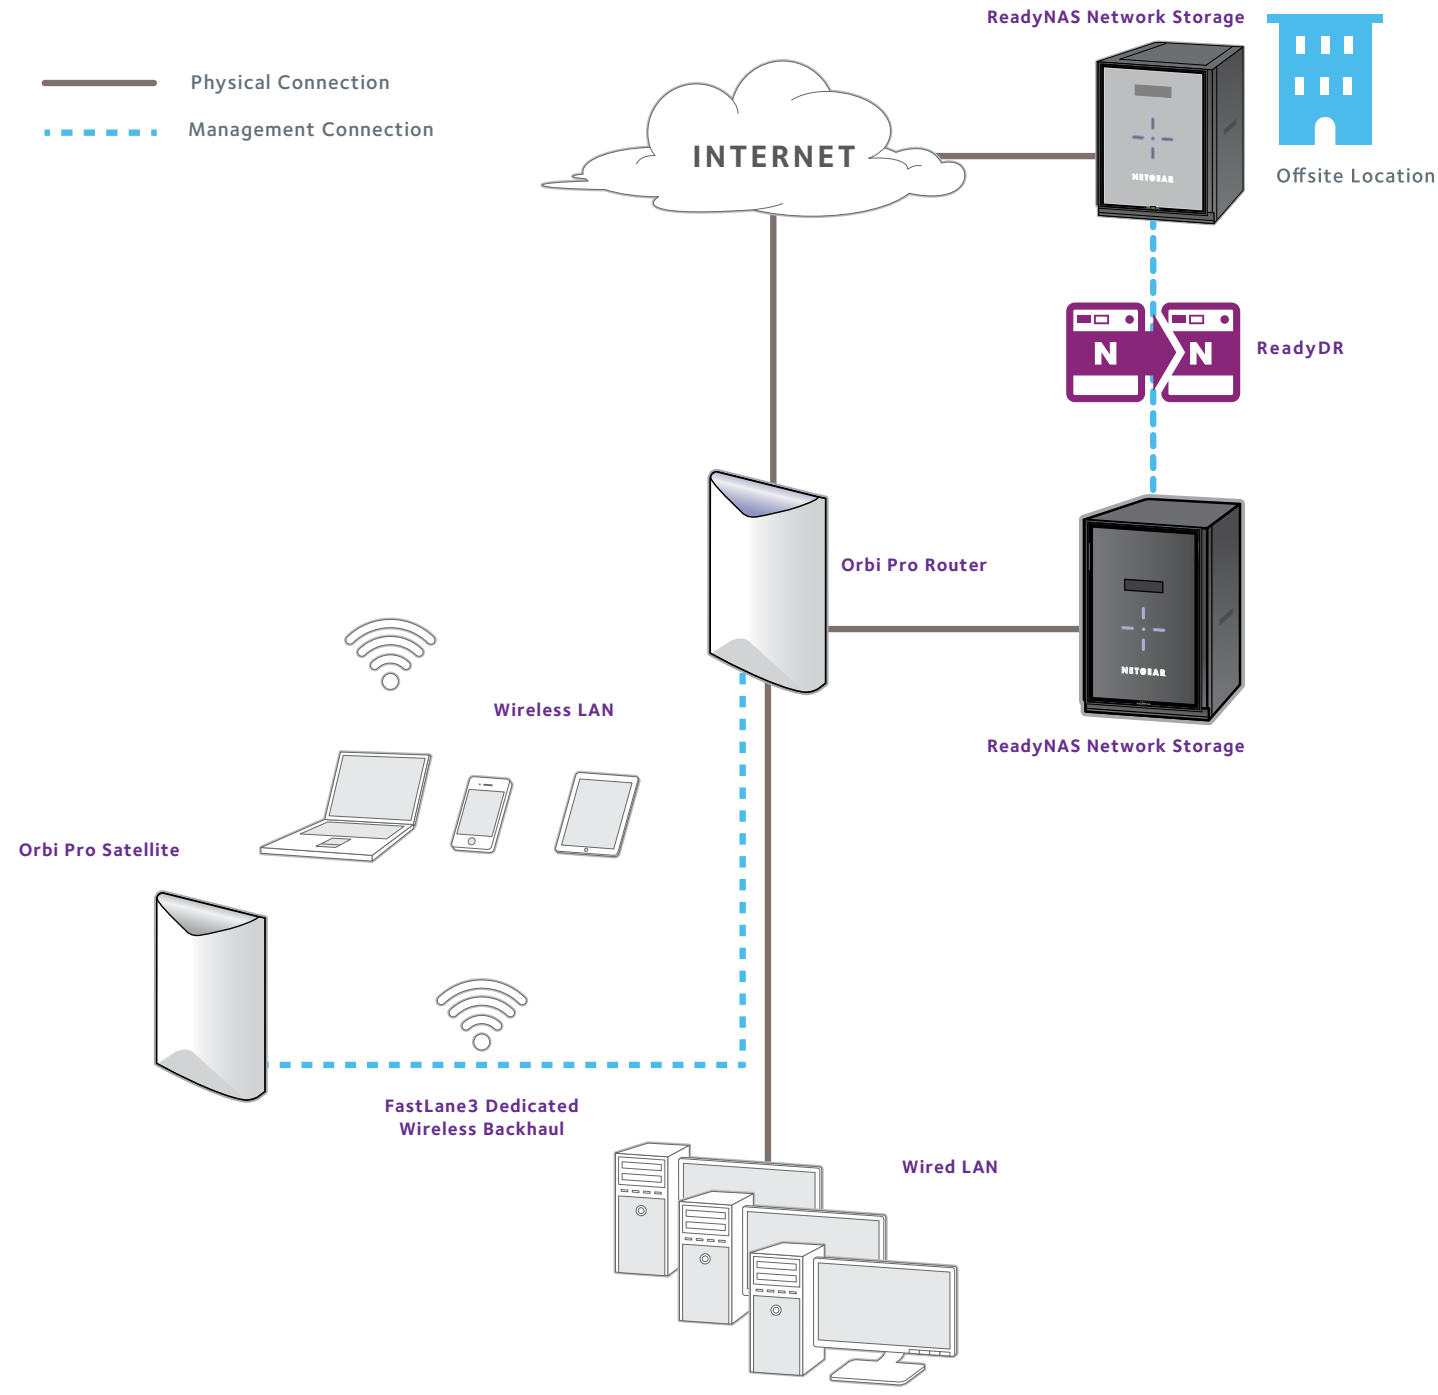


WIRED SOLUTION INSIGHT, 5-150 USERS

Connection Setup

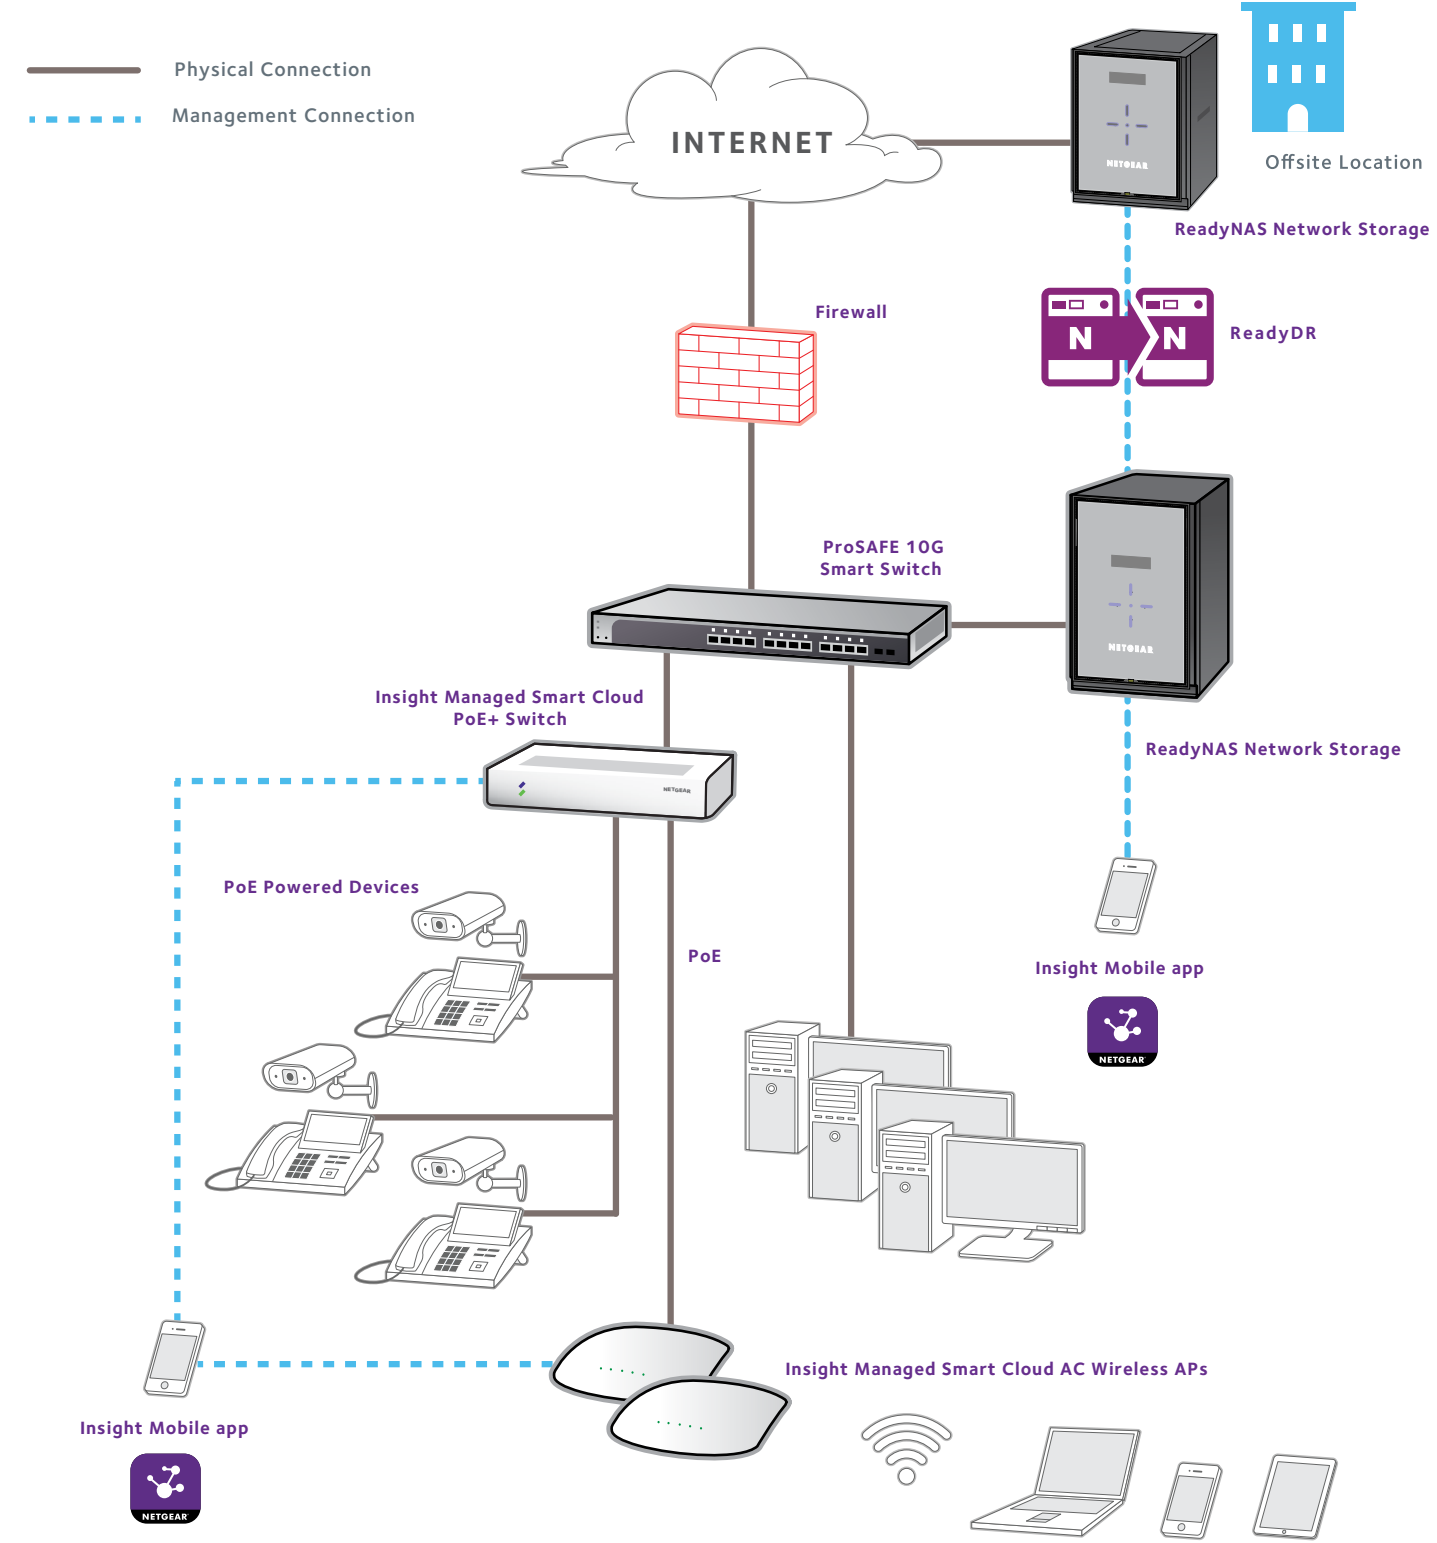


NETWORK SOLUTION FOR A GROWING MID-SIZE BUSINESS, 75-250 USERS


Connection Setup

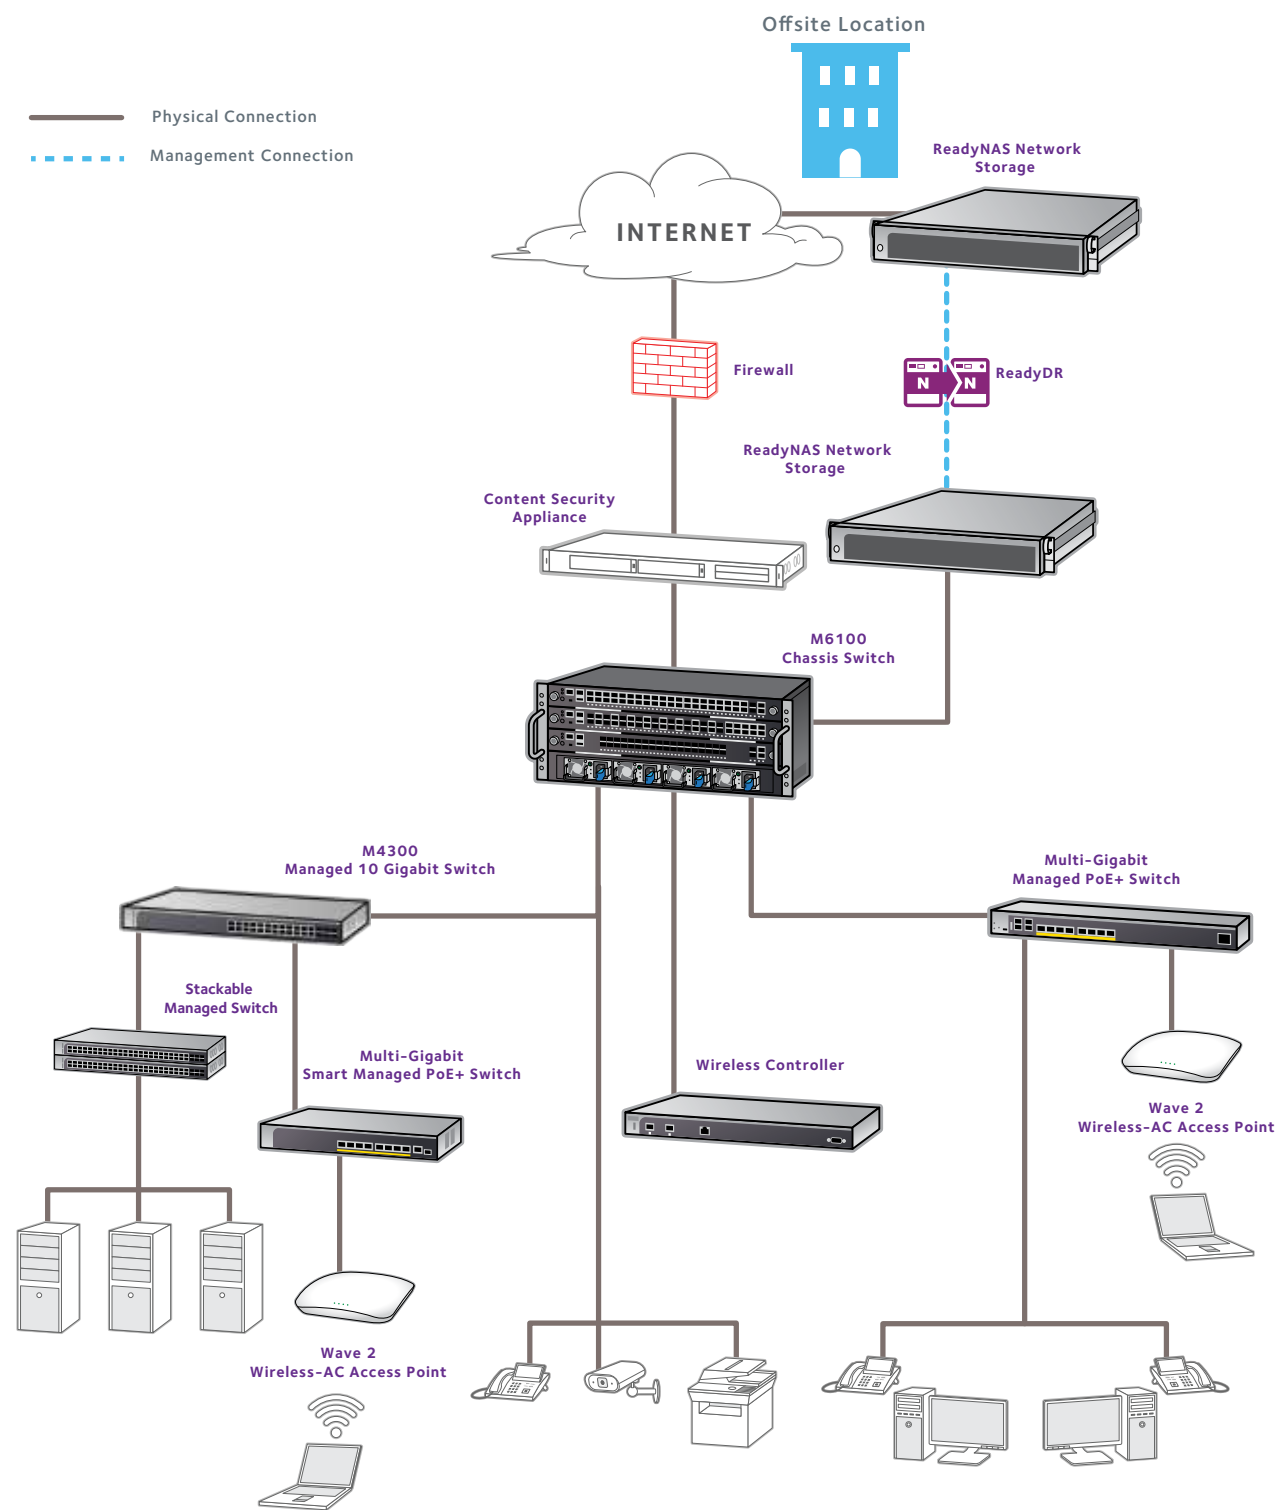

NETWORK SOLUTION FOR AN ENTERPRISE BUSINESS, 250-500+ USERS

Connection Setup

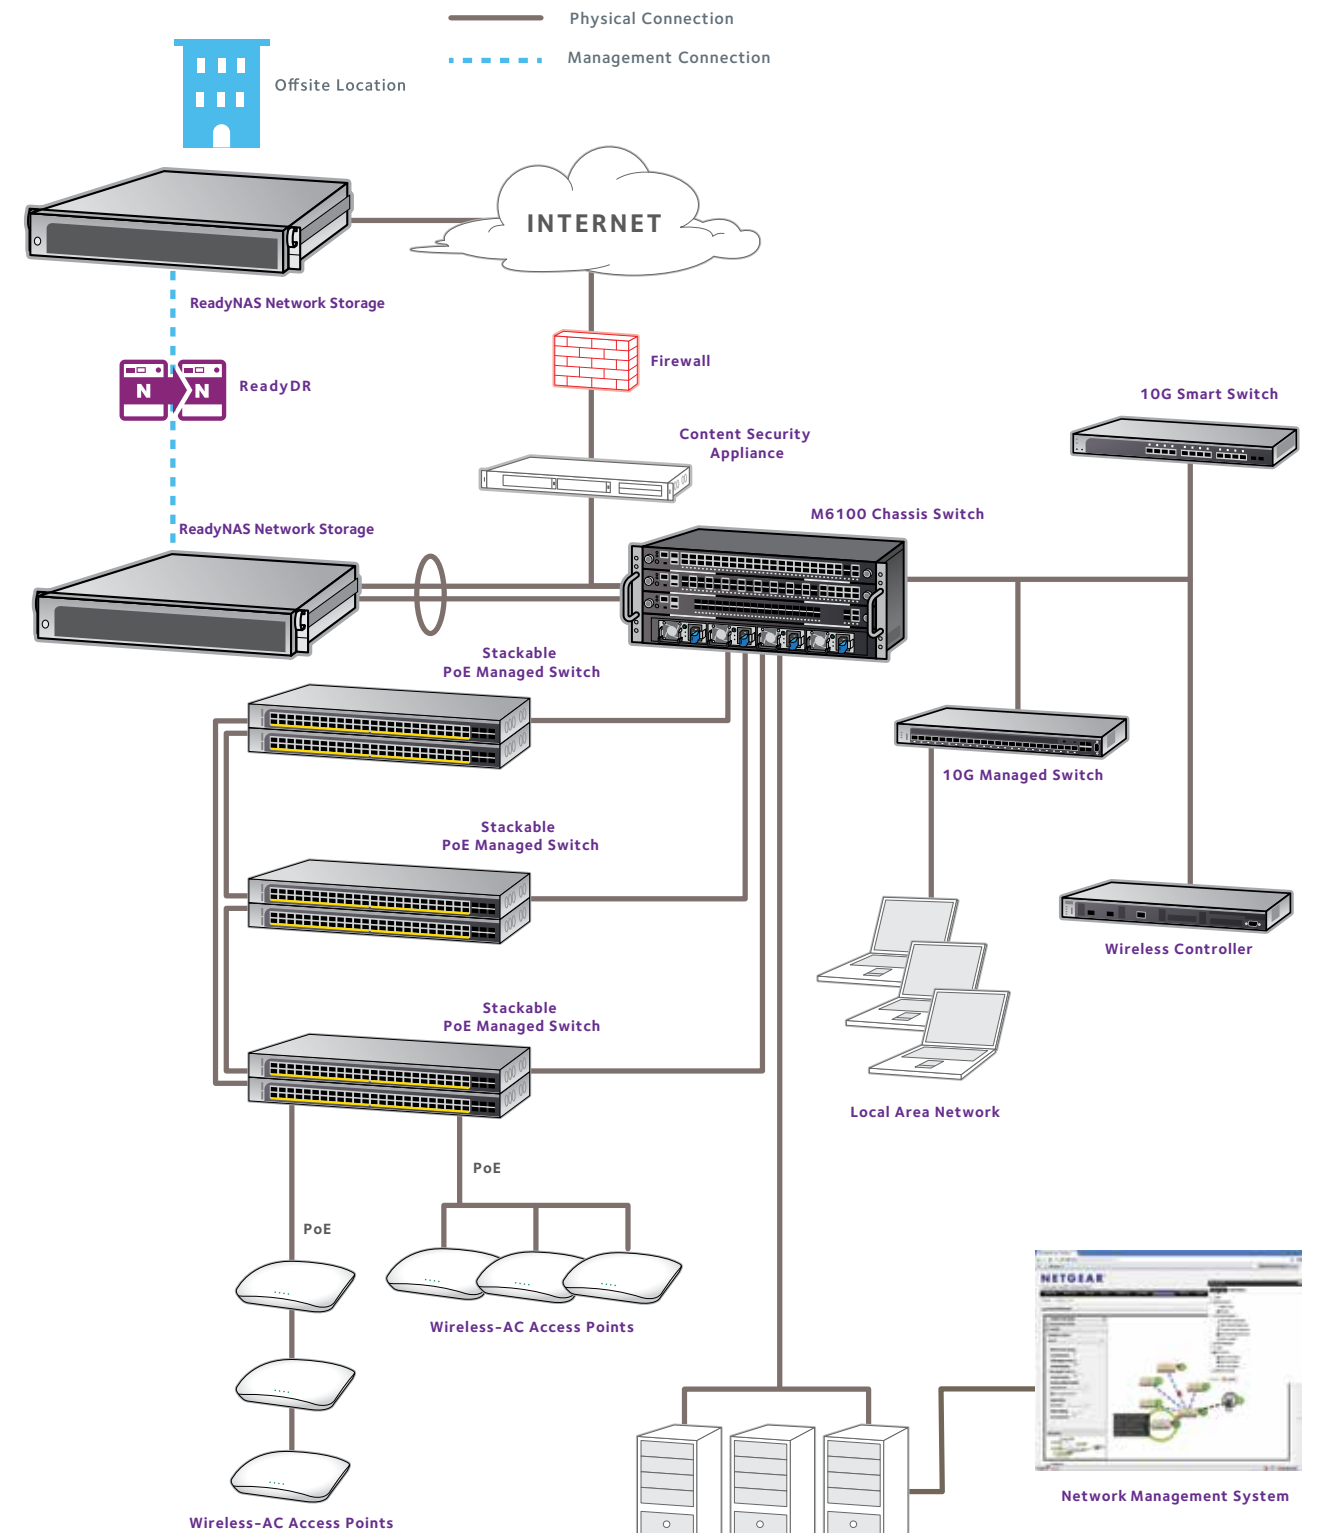

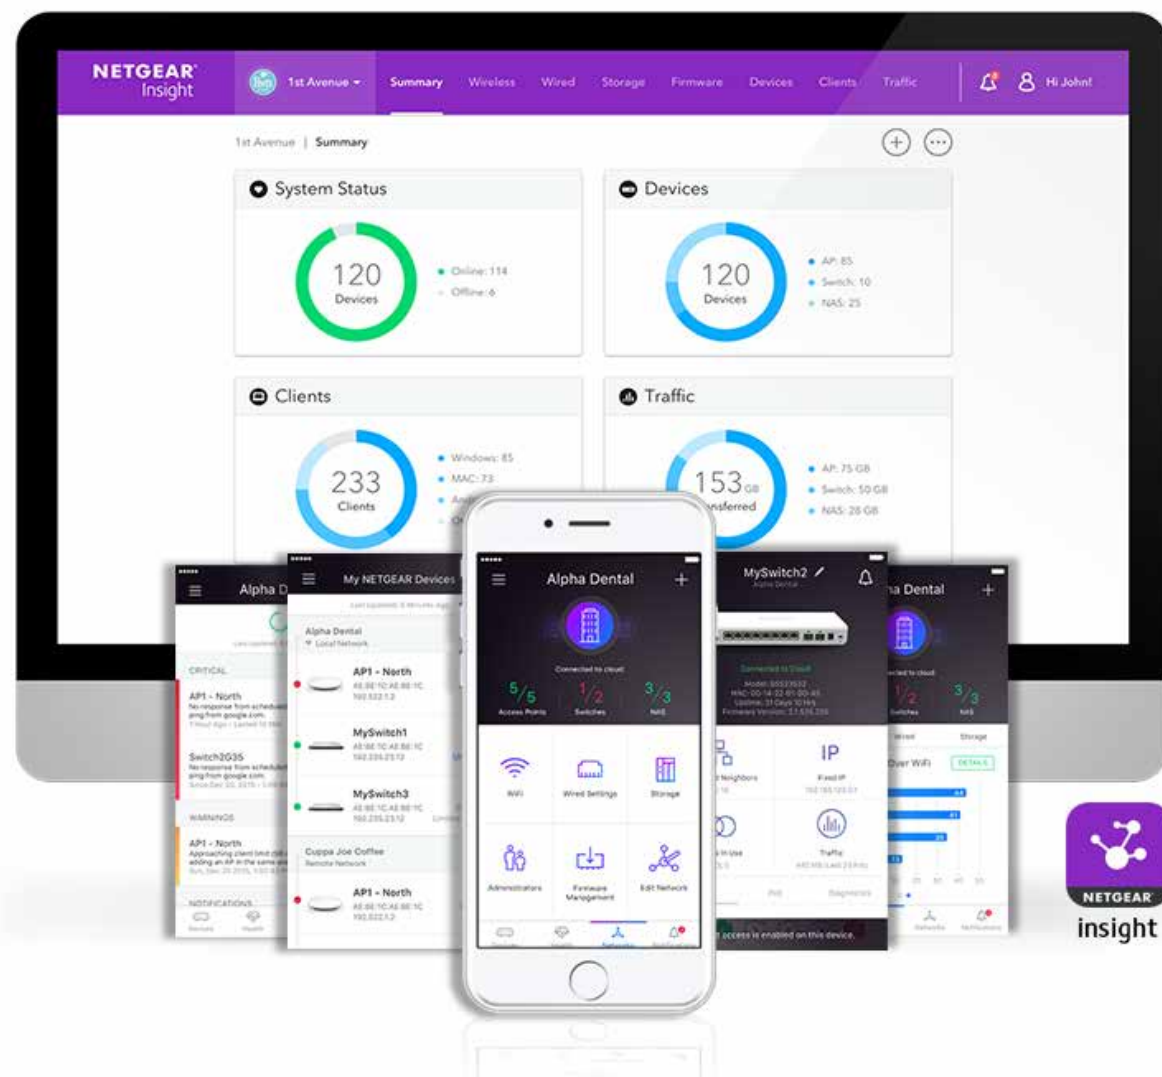

NETGEAR Insight Management Solution

UNIFIED REMOTE NETWORK VISIBILITY AND CONTROL WITH NETGEAR INSIGHT




The NETGEAR Insight™ management solution was custom-built from the ground up to meet the specific needs of small businesses and provide an unrivaled remote management user experience. The Insight platform allows any small and medium business owner or their IT services professional to discover and setup their NETGEAR Insight Managed devices, remote monitor and manage them with the ease, simplicity and intuitiveness of either a mobile app or a Cloud portal*, anytime, anywhere. Best yet NETGEAR Insight does this without requiring small businesses to purchase additional management hardware or software.

NETGEAR Insight enables multi-location, multi-device configuration of your NETGEAR Insight Managed switches, Insight Managed wireless access points, and Business-Class storage devices either locally or remotely. It provides network management, monitoring and service deployment for the easiest and most user-friendly networking experience.

NETGEAR Insight management solution is a freemium offering. NETGEAR Insight comes with 2 subscription plans, Insight Basic and Insight Premium. For more information on the Insight subscription plans, go to <https://insight.netgear.com>.

Your Network. Anytime. Anywhere.

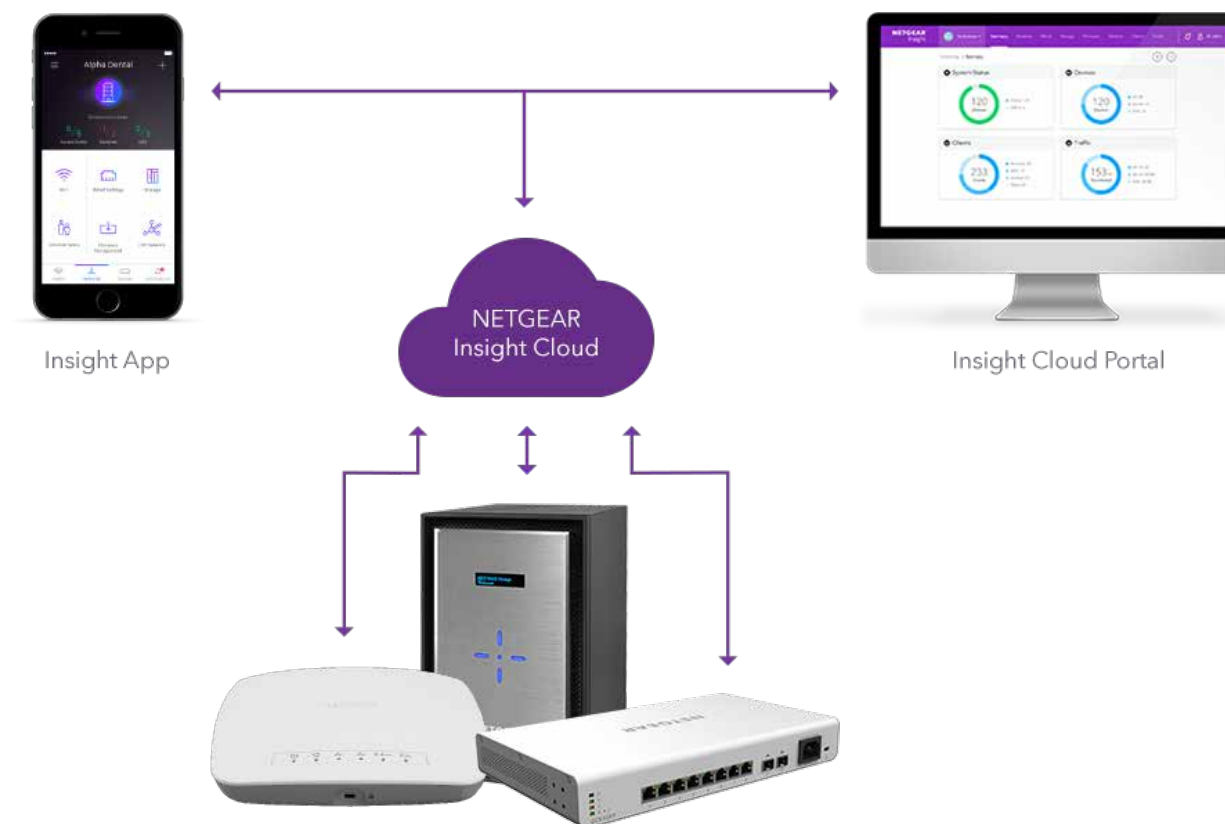

*Cloud Portal available with the Insight Premium subscription. See insight.netgear.com for details



Remote management from any screen, small or large


All the setup, monitoring and management features available through the Insight app are now also available through the Insight Cloud portal*. With a larger screen real estate, users will have a single-pane view of all their devices and their locations in an intuitive interface.

Mobile-first network management



ONE-TOUCH SETUP

Easy installation, no need for an IT expert

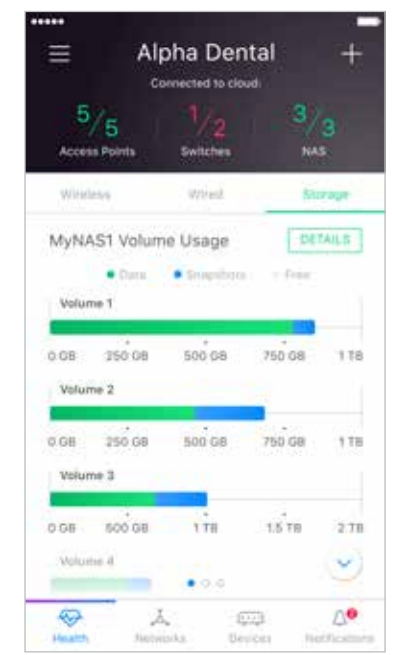

ONE-TOUCH MONITORING

Remote monitoring anytime, anywhere



ONE-TOUCH MANAGEMENT

Manage your network from the palm of your hand

*Cloud Portal available with the Insight Premium subscription. See insight.netgear.com for details.



PRODUCT	NETGEAR INSIGHT 4.0	
Features	Full Network Discovery	<ul style="list-style-type: none"> Discovery of select NETGEAR network devices - access points, switches and storage Discovery and setup of devices managed by the NETGEAR Insight Managed network devices Multi-device monitoring dashboard NETGEAR Smart Managed Switch Discovery, registration and IP address Management Visibility into WiFi clients
	Setup And Installation Of Insight Managed Devices	<ul style="list-style-type: none"> Multiple approaches for easy device discovery via Wifi network discovery mode, QR and bar code scanning Wireless AP - Router or AP mode set up Set rate limits for upload and download of Insight Managed Wireless AP (across both wired and wireless networks) Setup advanced switching features including VLANs, LAGs, and PoE Auto-join and configure (zero-touch deployment) of additional Insight Managed devices
	Full Monitoring Of Insight Managed Devices	<ul style="list-style-type: none"> Device Status Dashboards across wired and wireless networks Device status (Connected, Not reachable, Up time, Firmware version) Detailed logs of device activity Email and push notifications Data usage monitoring
	Complete Management Of Insight Managed Devices	<ul style="list-style-type: none"> Device discovery across full wireless and wired network Guest WiFi/Captive Portal Firmware upgrade and device reboot Define URL filtering for wireless AP VLAN, LAG, QoS, ACLs, and advanced PoE management Smart WiFi management (with Premium subscription) WiFi Fast Roaming (with Premium subscription) PoE scheduler (with Premium subscription) RTP/RSTP/MSTP support (with Premium subscription)
	Multi-locations	<ul style="list-style-type: none"> Easily create and manage multiple locations from a single pane-of-glass Add and configure devices in each network Monitor across all locations from anywhere
Common Management Ownership	End customer or Managed Service Provider	
Supported Operating System	iOS (version 8.0 and above), Android (version 4.4 and above)	

COMPATIBILITY TABLE

NETGEAR INSIGHT	SET-UP	MANAGE	MONITOR	DISCOVER	REGISTER
Insight Managed Switches	X	X	X	X	X
Insight Managed Access Points	X	X	X	X	X
ReadyNAS (except 100 series)		X	X	X	X
Smart Managed Plus Switches			X	X	X
Smart Managed Pro Switches			X	X	X
Orbi Pro			X	X	X
WAC700 Series				X	X
WAC100 Series					X
Fully Managed Switches					X
Unmanaged Switches					X
ReadyNAS 100 Series					X



NETGEAR FEATURES THE MOST COMPREHENSIVE, SCALABLE AND AFFORDABLE SWITCHING PORTFOLIO

NETGEAR offers a uniquely comprehensive portfolio of highly flexible and scalable network switches that fit every business need. From 5 to 144 ports, with Gigabit, Multi-Gigabit or 10-Gigabit copper and/or fiber connectivity, intuitive network management options, including Cloud management with Insight, and advanced L2 and L3 features, comprehensive PoE support and unique form factors, NETGEAR is unrivaled in the switching choice it offers to its business customers. NETGEAR switches also feature business-friendly advanced switching technology packaged in sleek modern designs with innovative mounting options with its Click switches and Easy-Mount switches.

UNMANAGED

Plug and Play switching for organizations in need of instant connectivity. No management required.

SMART MANAGED PLUS

Entry level management for essential services. Set priority for voice, video and other data traffic for enhanced service and performance.

SMART MANAGED PRO

For growing organizations needing more refined control, incorporating secure setup, access and automated management of prioritized voice, video and data traffic.

SMART CLOUD

Fully integrated cloud manageable switches. Easily setup, deploy, manage & monitor your Smart Cloud switches through the NETGEAR Insight app.

FULLY MANAGED

For bigger and maturing networks where granular control is key to minimizing traffic congestion and performance bottlenecks for convergence based applications.

CHASSIS

Advance your networking to a new generation of Chassis switch to provide reliability, vastly increased speed and deployment versatility. This is a platform that has no hidden licensing or support costs and where Enterprise IT meets SMB price points.

Just pick the switch that's best for you!

SWITCHING

	UNMANAGED	SMART MANAGED PLUS	SMART MANAGED PRO	SMART CLOUD	FULLY MANAGED	CHASSIS
Customer	Small			Small	Mid sized	
Switching	L2			L2+/Lite L3		L2+/L3 L2/3/4
10/100	FS/JFS Series			FS Series	M4100	
GbE	200/600 300 100 500	Click 100 400/500	GS Series GS Series GS Series S3300	GC Series	M4100/M4200 M4300	M6100
10GbE		XS708Ev2 XS716E	XS Series		M4300	M6100
Multi-gig	XS505/8M and GS110MX	GS110EMX XS512EM/724EM	MS Series		M4200	
Management		NMS300			Insight	NMS300


EXPERIENCE THE MOST COMPREHENSIVE AND AFFORDABLE FULL 10-GIGABIT BUSINESS SWITCH PORTFOLIO

Connectivity matters more every day!

Network connectivity is the new utility. As water runs out of the tap flawlessly, network data is expected to do the same. Users want to be able to connect with any device, anywhere and anytime with high quality, super-fast connections and no downtime.

10 drivers for 10-Gigabit networking

Modern applications, wireless device expansion and IT optimization are now moving 10-Gigabit connectivity to the top of Enterprise IT teams' priorities. The increase in mobility, voice and video combined with virtualization and the doubling of data every 2 years are some of the main drivers for bottlenecks that are occurring in parts of the network not previously seen with Gigabit connectivity. 10-Gigabit is the new Gigabit!

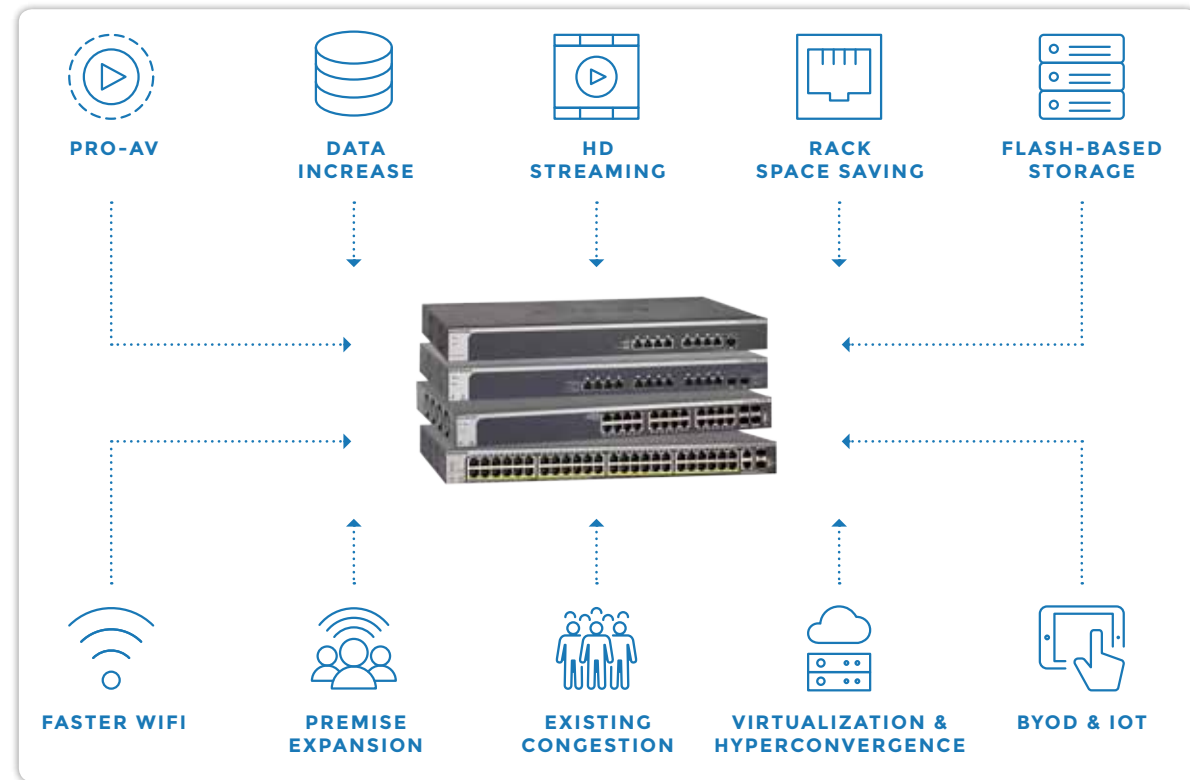

NETGEAR 10-Gigabit Portfolio

NETGEAR is the leader in the 10-Gigabit Enterprise switch market with the most versatile and comprehensive offerings in the market at the most affordable price points. Enjoy the highest security and scalability, massive performance and absolutely no downtime with our high-end 10-Gigabit switches. NETGEAR has you covered with a uniquely comprehensive portfolio of highly flexible and scalable full 10-Gigabit switches that fit every business need. From 8 to 48 ports, featuring both copper and fiber options, 1U full width and 1U half-width (for more efficient use of rack space), NETGEAR is unrivaled in the choice it offers business customers looking for 10-Gigabit switching. The future of networking is now!

Follow the X!

An X in the model name at NETGEAR is your guide to faster speed! An "X" at the beginning = Full 10-Gigabit connectivity! An "X" near the end = 10-Gigabit uplinks on both switches and ReadyNAS. We made them easy to find.



Full 10-Gigabit X models comparison charts. Just pick the one that's best for you!

FULL 10-GIGABIT X MODELS

MODEL	XS708Ev2	XS716E	XS708T	XS712Tv2	XS716T	XS728T	XS748T
Management	Smart Managed Plus	Smart Managed Plus	Smart Managed Pro	Smart Managed Pro	Smart Managed Pro	Smart Managed Pro	Smart Managed Pro
Total 10Gb ports	8	16	8	12	16	28	48
10Gb Copper ports	8	16	8	12	16	24	44
10Gb SFP+ ports	1 combo	1 combo	2 combo	2 combo	2 combo	4 dedicated	4 dedicated
Line rate (Gbps)	160	320	160	240	320	560	960
Full rackmount	Y	Y	Y	Y	Y	Y	Y

STACKABLE M4300 SERIES MODELS

MODEL NAME	M4300-8X8F	M4300-12X12F	M4300-24X	M4300-24X24F	M4300-48X	M4300-96X
MODEL NO	XSM4316S	XSM4324S	XSM4324CS	XSM4348S	XSM4348CS	XSM4396K0 OR K1
Management	Fully Managed	Fully Managed	Fully Managed	Fully Managed	Fully Managed	Fully Managed
Total 10Gb ports	16	24	24	48	48	Up to 96
10Gb Copper ports	8	12	24	24	48	Up to 96
10Gb SFP+ ports	8 dedicated	12 dedicated	4 combo	24 dedicated	4 combo	Up to 96
40Gb QSFP+ ports	-	-	-	-	-	Up to 24
Line rate (Gbps)	320	480	480	960	960	1,920
Half Width	Y	Y	Y			
Full width				Y	Y	Y (2U)



NETGEAR INDUSTRY-FIRST CLICK & EASY-MOUNT SWITCHES

Put your ports where you need them and where other switches cannot go!



Click Switch Deployment Innovation

Simple to use mounting bracket enables vertical or horizontal orientation of ports. To install, just mount the bracket onto a wall, desk, table leg/pole or "Virtually Anywhere", and "Click" the switch into the bracket.

With Power-over-Ethernet (PoE) models, one wire will bring power AND network connectivity to the WiFi Access Points, surveillance cameras, and VoIP phones, so no need to install wall plugs in odd places!



Easy-Mount "Virtually Anywhere" Mounting System

The Easy-Mount Virtually Anywhere™ mounting system gives you the flexibility to place your PoE+ ports in locations where other switches will not go (under a counter/table, on the wall, on a pole or table leg, or even up in the ceiling or in ventilation ducts with its plenum rating).

If you do have an IT closet or rack, its unique design also allows for two switches to be mounted in a single 1U rack slot, saving valuable rack space while allowing for future expansion as needed. With Power-over-Ethernet (PoE), one wire will bring power AND network connectivity to the WiFi Access Points, PTZ surveillance cameras, and VoIP phones, even in dense areas.



Just pick the one that fits your needs!

CLICK SWITCH

EASY-MOUNT SWITCH/RACKMOUNT & BACK TO BACK IN 1U




MODEL	GSS108E	GSS116E	GSS108EPP	GS408EPP	GS418TPP	M4200-10MG-POE+
Description	8-port Gigabit Click Switch w/2 USB charging ports	16-port Gigabit Click Switch	8-port Gigabit Click Switch w/4-port PoE+	8-port PoE+ Gigabit Easy-Mount Switch	Easy-Mount 16-Port PoE+ Gigabit Smart Managed Pro Switch with 2 SFP Ports	Full Power PoE+ 8x2.5G and 2x10G Aggregation Switch For Wave 2 11ac AP deployment
Typical Deployment	Noise-sensitive environment, small offices, retail, primary care centers, cafes	Noise-sensitive environment, small offices, retail, primary care centers, cafes	Noise-sensitive environment, small offices, retail, primary care centers, cafes with PoE devices	SMBs, retail, primary care centers, cafes with dense PoE device deployment	Hospitality, catering, education, retail with very dense PoE device deployment	Wireless AC Wave 2 device deployment, SMBs with dense PoE device deployment
Gigabit Ethernet ports	8	16	8	8	16 + 2SFP	
Multi-Gig Ethernet ports						8
10-Gigabit ports						2 SFP
PoE+ ports			4	8	16	8
PoE budget			47W	124W	240W	240W
Fan	Fanless	Fanless	Fanless	Active fan/low noise	Active fan/low noise	Active fan/low noise
Management	Smart Managed Plus	Smart Managed Plus	Smart Managed Plus	Smart Managed Plus	Smart Managed Pro	Fully Managed

RELIABLE, AFFORDABLE, SIMPLE POE SOLUTIONS FOR YOUR BUSINESS

Power-over-Ethernet (PoE) is a revolutionary technology that has been quickly adopted by devices such as VoIP phones, IP video surveillance, and wireless access points. PoE supplies not only data but also power through that same Ethernet cable, allowing for easier deployment of devices and greatly reducing electrical wiring requirements.

PoE APPLICATIONS

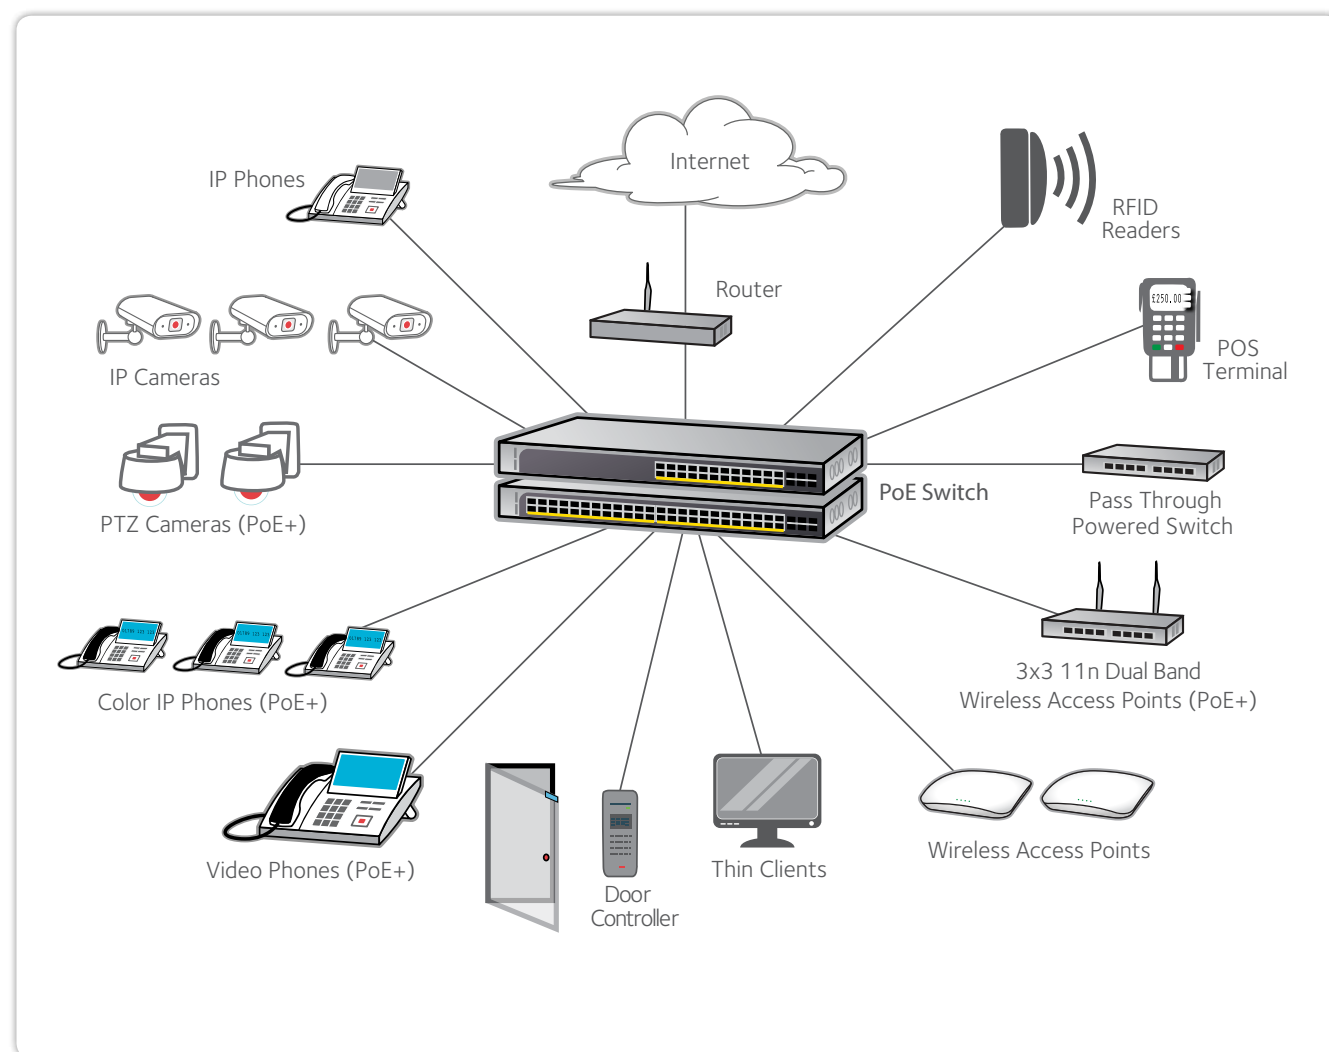

NETGEAR OFFERS A BROAD SPECTRUM OF POWER-OVER-ETHERNET SWITCHES

NETGEAR SWITCHES WITH POE/POE +/- UPOE

MODEL	PORTS	POE PORTS	POE BUDGET
UNMANAGED SWITCHES			
FS108P	8 x FE	4	53W
FS116P	16 x FE	8	70W
GS305P	5 x GbE	4	55.5W
GS308	8 x GbE	4	53W
GS108PP	8 x GbE	8 (PoE+)	123W
SMART MANAGED PLUS SWITCHES			
GS105PE* (PD-Powered Device ONLY - NO AC POWER)	5 x GbE	2 x PoE, 1 x PD	up to 19W with 802.3at power in, up to 7.9W with 802.3af power in
GS108PE	8 x GbE	4	53W
GSS108EPP	8 x GbE	4 (PoE+)	47W
GS408EPP	8 x GbE	8 (PoE+)	124W
JGS516PE	16 x GbE	8	85W
JGS524PE	24 x GbE	12	100W
SMART MANAGED PRO SWITCHES			
GS110TP	8 x GbE + 2 SFP	8	46W
GSS10TLP	8 x GbE + 2 SFP	8 (PoE+)	75W
GSS10TP	8 x GbE + 2 SFP	8 (PoE+)	130W
GSS10TPP	8 x GbE + 2 SFP	8 (PoE+)	190W
MSS10TXPP	4 x GbE + 2 x 2.5GbE + 2 x 5GbE + 1 x 10GBASE-T + 1 x SFP+	8 (PoE+)	180W
GS516TP	16 x GbE	8 x PoE, 2 x PD	76W (AC in), 22W (2x802.3at in), 11W (1x802.3at + 1x802.3af in)
GS418TPP	16 x GbE + 2 SFP	16 (PoE+)	240W
FS728TLP	24 x FE + 2 x GbE + 2 Combo SFP	12	100W
FS728TP	24 x FE + 2 x GbE + 2 x Combo SFP	24	192W
GS724TPv2	24 x GbE and 2 GbE dedicated SFP	24 (PoE+)	190W
GS728TP	24 x GbE and 4 GbE dedicated SFP	24 (8 PoE+)	192W
GS728TPv2	24 x GbE and 4 GbE dedicated SFP	24 PoE+	190W
GS728TPP	24 x GbE and 4 GbE dedicated SFP	24 PoE+	384W
GS728TPPv2	24 x GbE and 4 GbE dedicated SFP	24 PoE+	380W
GS752TP	48 x GbE and 4 GbE dedicated SFP	48 (8 PoE+)	384W
GS752TPv2	48 x GbE and 4 GbE dedicated SFP	48 PoE+	380W
GS752TPP	48 x GbE and 4 GbE dedicated SFP	48 PoE+	760W
STACKABLE SMART MANAGED PRO SWITCHES			
S3300-28X-POE+ (GS728TXP)	24 x GbE + 4 Dedicated 10G ports (2 RJ45 + 2 SFP+)	24 (PoE+)	195W and up to 720W with RPS
S3300-52X-POE+ (GS752TXP)	48 x GbE + 4 Dedicated 10G ports (2 RJ45 + 2 SFP+)	48 (PoE+)	390W and up to 1400W with RPS
GS752TPSB (incl. AGC761 stacking cable)	48 x GbE and 2 Combo SFP and 4 Dedicated 1G/2.5G SFP	48 (8 PoE+)	384W
SMART CLOUD MANAGED SWITCHES			
GC110P	8 x GbE + 2 x 1G SFP	8	62W
GC510P	8 x GbE + 2 x 1G SFP	8 (PoE+)	134W
GC510PP	8 x GbE + 2 x 1G SFP	8 (PoE+)	195W
GC728XP	24 x GbE + 2 x 1G SFP + 2 x 10G SFP+	24 (PoE+)	390W
M4100 SERIES MANAGED SWITCHES (L2+ STANDALONE)			
M4100-12GF (GSM7212F)	12 x GbE with 12 shared SFP and 4 GbE PoE+	4 (PoE+)	150W
M4100-26G-POE (GSM7226LP)	26 x GbE + 4 Combo SFP	24	192W and up to 380W with EPS
M4100-24G-POE+ (GSM7224P)	24 x GbE + 4 Combo SFP	24 (PoE+)	380W and up to 720W with EPS
M4100-50G-POE+ (GSM7248P)	50 x GbE + 4 Combo SFP	48 (PoE+)	380W and up to 1,440W with EPS
M4200 SERIES INTELLIGENT EDGE MANAGED SWITCHES (L2+ L3 MULTI-GIGABIT)			
M4200-10MG-POE+ (GSM4210P)	8 x 2.5G + 2 x 10GBASE-T	8 (PoE+)	240W
M4300 SERIES INTELLIGENT EDGE MANAGED SWITCHES (L2+ L3 STACKABLE)			
M4300-28G-POE+ (GSM4328PA)	24 x GbE + 2 x 10GBASE-T + 2 x 10GBASE-X SFP+	24 (PoE+)	480W 1 PSU (APS550W) 720W 2 PSUs
M4300-28G-POE+ (GSM4328PB)	24 x GbE + 2 x 10GBASE-T + 2 x 10GBASE-X SFP+	24 (PoE+)	630W (110V) 720W (220V) 1 PSU (APS1000W) 720W 2 PSUs
M4300-52G-POE+ (GSM4352PA)	48 x GbE + 2 x 10GBASE-T + 2 x 10GBASE-X SFP+	48 (PoE+)	480W 1 PSU (APS550W) 720W 2 PSUs
M4300-52G-POE+ (GSM4352PB)	48 x GbE + 2 x 10GBASE-T + 2 x 10GBASE-X SFP+	48 (PoE+)	591W (110V) 860W (220V) 1 PSU (APS1000W) 1010W (110V) 1440W (220V) 2 PSUs
M4300-96X (XSM4396K0)	Up to 96 x 10GBASE-T or SFP+; up to 24 x QSFP+	48 (PoE+)	484W (110V) 634W (220V) 1 PSU (APS1200W) 1440W (2 PSU) (APS1200W)
M6100 SERIES CAMPUS EDGE AND SMB CORE CHASSIS SWITCHES			
XCM89P	PoE/PoE+ daughter card for XCM8944 & XCM8948	Up to 136 PoE+	Up to 30W per port
XCM89UP	PoE/PoE+ & UPOE daughter card for XCM8944 & XCM8948	Up to 136 UPOE	Up to 60W per port

Switch Naming Convention

Unmanaged & Smart Managed Plus – How to read the product code

FS/JFS GS/JGS GSS MS XS 1 08 E M X LP P PP

- Fast Ethernet
- Gigabit Ethernet
- Gigabit Ethernet ClickSwitch
- Multigigabit Ethernet (5-speed)
- 10-Gigabit Ethernet
- Series (see below for legend)
- Number of Ports
- Smart Managed Plus
- Multigigabit Ethernet (5-speed) uplinks (GS-Series)* capable ports (XS-Series)
- 10-Gigabit uplinks
- Low Power PoE
- PoE or PoE+
- High Power PoE or PoE+

Smart Managed Pro & Smart Cloud Switches – How to read the product code

FS GS GC MS XS 7 52 T X LP P PP S

- Fast Ethernet
 - Gigabit Ethernet
 - Smart Cloud Gigabit Ethernet
 - Multigigabit Ethernet (5-speed)
 - 10-Gigabit Ethernet
 - Series (see below for legend)
 - Number of Ports
 - Smart Managed ProStackable
 - 10-Gigabit uplinks
 - Low Power PoE
 - PoE or PoE+
 - High Power PoE or PoE+
 - Stackable
- *Note: S3300 (GS728X/XP & GS752X/XP) are also stackable.

Fully Managed Switches – How to read the product code

GS M 7 3 28 S XS M 7 2 24 S

- Gigabit Ethernet
- Fully Managed
- Switch Series
- Layer 3
- Number of Ports
- Stackable
- 10-Gigabit Ethernet
- Fully Managed
- Switch Series
- Layer 2+
- Number of Ports
- Stackable

Legend


- 1 = Desktop (ProSAFE, Insight)
- 2 = Desktop Essentials (Plastic)
- 3 = Desktop Essentials (Metal)
- 4 = Easy-Mount
- 5 = Desktop/Rackmount (13")
- 6 = Desktop SOHO (Plastic)
- 7 = Rackmount (17")
- 8 = Nighthawk Pro Gaming (Desktop)
- 9 = Desktop Lifestyle (Plastic)

A SHORT GUIDE TO NETGEAR SWITCHES MANAGEMENT

Just pick the type of management that is right for you

	Unmanaged FOR HOME AND BUSINESS	Smart Managed Plus FOR HOME AND BUSINESS	Smart Managed Pro FOR SMB NETWORKS	Smart Cloud FOR SMB NETWORKS	Fully Managed FOR SMALL NETWORK CORE AND MID-ENTERPRISE EDGE
Split a Single Ethernet Connection	•	•	•	•	•
Plug-and-Play	•	•	•	•	•
Easy to Use	•	•	•	•	•
Web GUI Management		•	•	•	•
Network Control (VLAN, QoS, IGMP)		•	•	•	•
Network Security (Storm Control, Auto DoS)		•	•	•	•
Advanced VLAN & QoS		•	•	•	•
Advanced Security			•	•	•
Static Routing			•	•	•
Higher Performance			•	•	•
Advanced L2, L3, L4 Routing and Features			•	•	•
Web GUI and CLI Management					•
SDN Ready					•
BEST HA & Redundancy					•
Premium Performance					•
Insight Management				•	
Remote Cloud Management				•	

UNLOCK YOUR NETWORK POTENTIAL WITH 5-SPEED NETWORKING!



Modern, high-performance network devices such as 5G network cards, gaming computers, desktop computers, servers, network attached storage (NAS) devices, or IEEE 802.11ac Wave 2 wireless access points are capable of 2.5-Gigabit or 5-Gigabit connectivity. With the existing Gigabit and 10-Gigabit Ethernet standards, these devices' potential is wasted:

- The existing Gigabit and 10-Gigabit Ethernet standards do not allow speeds between 10 Gbps and 1 Gbps. If you connect an 802.11ac Wave 2 wireless access point or other Multi-Gigabit-capable device to a 10-Gigabit switch port, the connection automatically downgrades to 1 Gbps because the device cannot achieve 10 Gbps.
- The existing 10-Gigabit Ethernet standard requires Cat 6A or better Ethernet cable for lengths up to 100 meters (328 feet). However, most existing cabling is only Cat 5e or Cat 6, and re-wiring can be costly.

Multi-Gigabit Ethernet switching fixes both problems by allowing a connection to operate at any speed up to the speed of the connected switch port (2.5 Gbps or 5 Gbps) over a Cat 5e or Cat 6 Ethernet cable.

With NETGEAR Multi-Gigabit Ethernet Switches, you can use the full power of your devices without running new cables. Just connect the appropriate port on your NETGEAR Multi-Gigabit Ethernet Switch to a Multi-Gigabit-capable device and your switch selects the fastest supported speed automatically.

Give the speed that your devices need



5 TIMES FASTER USING THE SAME CABLING

	1G	2.5G	5G	10G
CAT 5e	✓	✓	✓	
CAT 6	✓	✓	✓	55m Limit
CAT 6A	✓	✓	✓	✓

Multi-Gig vs 5-speed, what is the difference?

MULTI-GIG PORT: intelligent port that automatically adapts to the speed required and can provide 2.5G and/or 5G connectivity (NBase-T standard)

5-SPEED PORT: intelligent port that automatically adapts to the speed required and can provide either one of the 5 networking speeds: 100M /1G / 2.5G / 5G or 10G.

NETGEAR WIDE PORTFOLIO OF MULTI-GIG / 5-SPEED SWITCHES

	XS505M	XS508M	GS110MX	GS110EMX	XS512EM	XS724EM	MS510TX	MS510TXPP	M4200
# of Ports	5	8	10	10	12	24	10	10	10
# of 1G Ports	-	-	8	8	-	-	4	4	-
# of 1G/2.5G Multi-Gig Ports	-	-	-	-	-	-	2	2	6
# of 1G/2.5G/5G Multi-Gig Ports	-	-	-	-	-	-	2	2	2
# of 10G Fiber Ports	1	1	-	-	2	2	1	1	2
# of 5-Speed Ports (100M/1G/2.5G/5G/10G)	4	7	2	2	12	24	1	1	-
PoE+ Ports	-	-	-	-	-	-	-	8	8
Type of Management	Unmanaged	Unmanaged	Unmanaged	Smart Managed Plus	Smart Managed Plus	Smart Managed Plus	Smart Managed Pro	Smart Managed Pro	Fully Managed
Plug and Play	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Web Interface for Configuration	-	-	-	Yes	Yes	Yes	Yes	Yes	Yes
Easy Mount	-	-	-	-	-	-	-	-	Yes

NETWORKING FOR ZERO-LATENCY AND FLAWLESS AV-OVER-IP



Matrix switching challenges

Lack of scalability

- No I/O flexibility - 32x32, 64x64 limits
- No flexibility when adding ports or upgrading resolution (4K, 8K)

Proprietary technology & lack of compatibility

- No possibility to mix different AV vendors
- Slower adoption by the IT community

Complex deployment

- Complicated programming required
- Complex firmware updates

AV-over-IP with NETGEAR

Unprecedented cost savings

- 16x16 matrix switcher = \$1250 per port
- NETGEAR 10-Gigabit switches < \$100 per port

Increased I/O flexibility & scalability


- Ethernet ports are fully bi-directional so each port may be treated as an AV input or an AV output.
- Flexible 1x23, 6x18, 4x20 are all possible.

Pre-configured – Plug and Play

- Firmware optimized for 4K60 video out of the box
- SDVoE-ready with pre-configured Multicast/IGMP

More business with more profits

- Win new business with more attractive price points
- Provide more added-value projects
- Tackle more jobs in the same timeframe

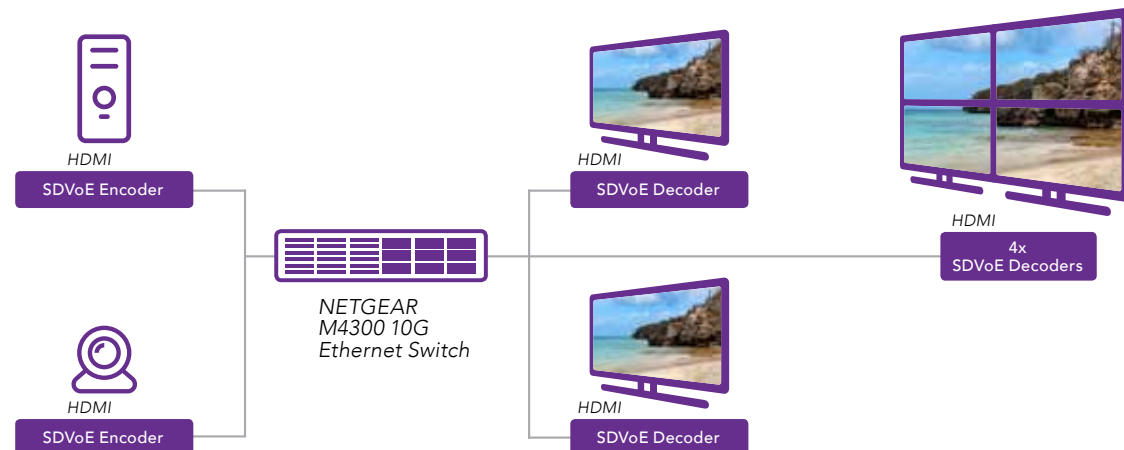

M4300 series



Pre-configured AV-over-IP switches

Large portfolio of ProAV switches

- 8 to 96 ports of 10G, combined copper and fiber

Zero-Touch installation

- Pre-configured Multicast/ IGMP

Best-In-Class stacking

- high-availability stacking between 10G & 1G

Prosafe Lifetime Limited Warranty

- Next Business Day Replacement, Lifetime Online chat support

M4300-96X focus

Unique 10G / 40G modular solution


- 8 to 96 ports of 10G and from 2 to 24 ports of 40G, PoE options

Scalable

- Replaces 8x8, 12x12, 16x16, 24x24 and 48x48 matrix switchers with a single switch

High-capacity

- Even up to a 72x72 equivalent configuration with high-performance stacking

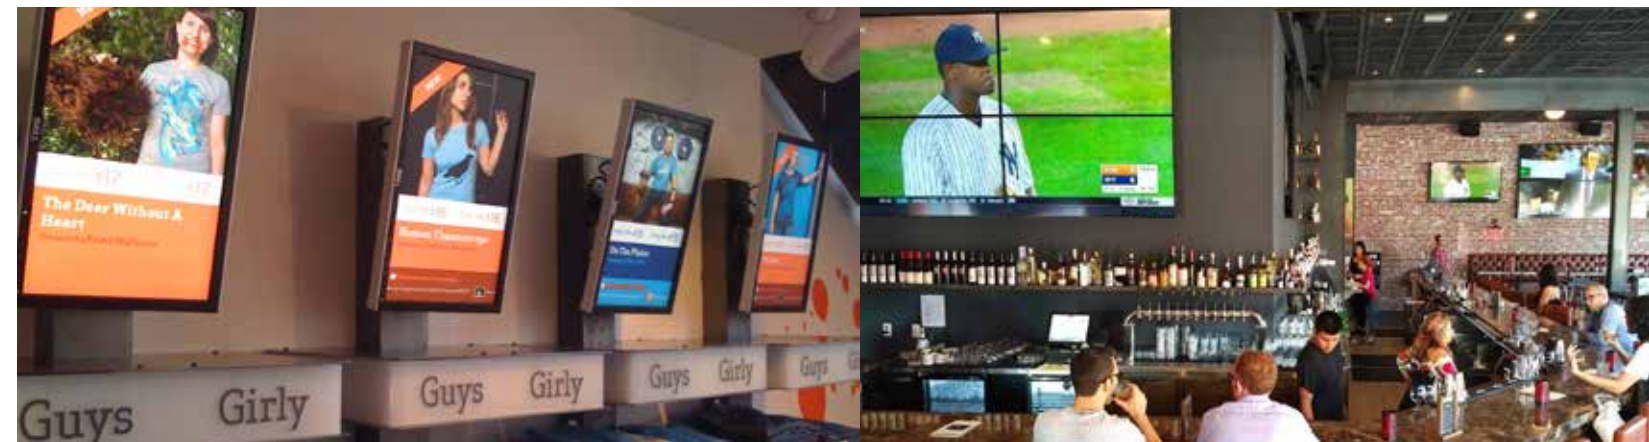

NETGEAR – SDVoE* founding member



SDVoE mission

- Define best practices and guidelines for AV-over-IP
- Member products interact without technical issues
- Use Ethernet to transport AV signals
- Educate the industry on no compromise, flawless AV-over-IP

Get help from our experts

- Lifetime hardware warranty
- Next Business Day Replacement
- 24/7 90 day phone support
- 24/7 Lifetime chat support
- Additional ProSUPPORT for Business packages for installation services, extended warranty and phone support
- Active community

*Software-Defined Video over Ethernet www.sdvoe.org

WHY CUSTOMERS CHOOSE NETGEAR UNMANAGED SWITCHES

Unmanaged switches are the ideal solution for small and medium organizations looking to expand their network with a Plug-and-Play solution.

NETGEAR Unmanaged Switches offers a wide range of models for different network deployment requirements.

Unmanaged switches are plug-and-play switches for businesses in need of instant connectivity with no management required. These energy efficient switches are well built and rigorously tested to provide the reliability businesses need. 802.1p traffic prioritization and jumbo frame support allow for seamless integration with more sophisticated networks.

Discover the 10 reasons why our customers love NETGEAR Unmanaged Switches

1	Market's widest portfolio	NETGEAR gets you covered with a comprehensive and versatile portfolio of Unmanaged switches including Full Fast Ethernet Switches and Full Gigabit Switches, a wide range of Ethernet port options 5, 8, 16, 24, 48 and multiple form factors.
2	Versatile Mounting Options	NETGEAR Unmanaged Switches comes in different form factors (Desktop and Rackmount) that allows you to install it in a wall, as a desktop switch or in a rack in an IT closet.
3	Plug-and-Play	No configuration required, just plug your devices and connect!
4	Silent Switches	All NETGEAR Unmanaged Switches are fanless, which makes them ideal for deployment in a quiet or noise-sensitive environment (conference rooms, doctor's office, office open space,...)
5	Traffic Prioritization	Prioritize mission-critical applications such as voice and video. Support of IEEE 802.1p and DSCP-based QoS for delivering data based on priority and type.
6	Easy to Monitor	Per port LEDs to easily identify each port activity and speed.
7	High-Quality Components	Built with Top Quality components to assure a long life. Unmanaged switches are built to last, and rigorously tested to provide the reliability businesses need.
8	Power it all	Choose from the broadest choice of PoE power to enable seamless PoE connection of standard PoE devices (IP Phones, Wireless Access Points, IP Cameras even high-power Pan-Tilt-Zoom models, IoT devices, etc).
9	Energy Efficient	NETGEAR Unmanaged Switches support the latest Energy Efficient Ethernet (IEEE 802.3az) standard, which reduces energy consumption when there is light traffic on an active ports or when there is no link or no activity detected. It can further save energy when a short cable is used.
10	Best-in-Class Warranty	100/500 Unmanaged Switches are covered with NETGEAR Industry's leading ProSAFE Lifetime Warranty, not only on hardware but also including lifetime online support as well as next-business day (NBD) replacement support, providing customers peace-of-mind.

Unmanaged Switches

Unmanaged, L2, 10/100 Fast Ethernet



MODEL		FS105	FS108	FS108P	FS116
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	5	8	8	16
	10/100/1000 RJ45 Ports (Auto Uplink)				
PoE	Power Over Ethernet 802.3af Ports			4	
	PoE Plus (30W) 802.3at Ports				
	Total PoE/PoE+ Power Budget			53 Watts	
Scalability	# MAC Addresses	2,000	2,000	1,000	8,000
	MAC Address Aging (sec)	289 sec	292 sec		200-300 sec
Quality of Service	Number of Priority Queues			2	2
	Traffic Prioritization			Honors 802.1p Priority Tags	Honors 802.1p Priority Tags
Multicast Filtering	IGMP Snooping Version				
Performance	Bandwidth	1 Gbps	1.6 Gbps	1.6 Gbps	3.2 Gbps
	Buffer Memory	48KB Per System	Not Supported	96 KB Per System	160 KB Per System
	Jumbo Frames	2,048 bytes	2,048 bytes	Not Supported	Not Supported
Energy Efficiency	IEEE 802.3az	Supports	Supports	Supports	
	Auto Port Power Down	Supports	Supports	Supports	
	Max Power Consumption	0.9 Watts	1.01 Watts	Only 3.1 Watts. PoE Delivery - 56.1 Watts Max	5.46 Watts
Physical	Desktop/Rackmount/Click	D	D	D	D
	Metal/Plastic Enclosure	M	M	M	M
	MTBF at 25°C	4,262,794 Hours	4,015,496 Hours	927,000 Hours	4,046,880 Hours
	Acoustic Noise	0dB	0dB	0dB	0dB
	Fan	none	none	none	none
	Width x Depth x Height	94 x 101 x 27 mm (3.7 x 3.9 x 1.1 in.)	158 x 101 x 29 mm (6.2 x 4 x 1.1 in.)	235 x 103 x 27 mm (9.3 x 4.1 x 1.1 in.)	285 x 102 x 27 mm (11.2 x 4.0 x 1.1 in.)
	Weight	0.25 kg (0.55 lb)	0.47 kg (1.04 lb)	0.50 kg (1.10 lb)	0.80 kg (1.8 lb)
Electromagnetic Compliance	Class (A or B)	B	B	B	A
Warranty Hardware		Lifetime	Lifetime	Lifetime	Lifetime
Warranty Power Supply		2 Year	2 Year	2 Year	2 Year
ProSUPPORT™ Maintenance PKGS	OnCall 24x7 1-year	PMB0S11	PMB0S11	PMB0S11	PMB0S11
	OnCall 24x7 3-year	PMB0S31	PMB0S31	PMB0S31	PMB0S31
	OnCall 24x7 5-year	PMB0S51	PMB0S51	PMB0S51	PMB0S51

Unmanaged Switches

Unmanaged, L2, Gigabit



Unmanaged, L2, 10/100 Fast Ethernet



Unmanaged, L2, Gigabit



MODEL	JFS524	FS116P	GS116	
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	24		
	10/100/1000 RJ45 Ports (Auto Uplink)		16	
PoE	Power Over Ethernet 802.3af Ports	8		
	PoE Plus (30W) 802.3at Ports			
	Total PoE/PoE+ Power Budget	70 Watts		
Scalability	# MAC Addresses	8,000	8,000	
	MAC Address Aging (sec)		typical 300sec	
Quality of Service	Number of Priority Queues	4	2	
	Traffic Prioritization	Honors 802.1p Priority Tags	Honors 802.1p Priority Tags	
Multicast Filtering	IGMP Snooping Version			
Performance	Bandwidth	4.8 Gbps	3.2 Gbps	
	Buffer Memory	256KB Per system	256 KB Per System	
	Jumbo Frames	4.8 Gbps	Not Supported	
Energy Efficiency	IEEE 802.3az	Supports	Supports	
	Auto Port Power Down		Supports	
	Max Power Consumption	4 Watts	10.0 Watts (no PoE) 80.0 Watts (with PoE max)	
Physical	Desktop/Rackmount/Click	R	D	
	Metal/Plastic Enclosure	M	M	
	MTBF at 25°C	2,940,540 Hours	546,673 Hours	
	Acoustic Noise	0dB	0dB	
	Fan	none	none	
	Width x Depth x Height	280 x 126 x 44 mm (11.0 x 5.0 x 1.7 in.)	286 x 102 x 27 mm (11.3 x 4 x 1.1 in.)	286 x 102 x 27 mm (11.2 x 4 x 1.1 in.)
	Weight	0.54 kg (1.19 lb)	0.9 kg (1.98 lb)	0.9 kg (1.98 lbs)
Electromagnetic Compliance	Class (A or B)	A	A	
Warranty Hardware	Lifetime	Lifetime	Lifetime	
Warranty Power Supply	Lifetime	2 Year	2 Year	
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0S12	PMB0S11	
	OnCall 24x7 3-year	PMB0S32	PMB0S31	
	OnCall 24x7 5-year	PMB0S52	PMB0S51	

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS105	GS108	GS108PP	JGS516	JGS524
Port Configuration	10/100 RJ45 Ports (Auto Uplink)				
	10/100/1000 RJ45 Ports (Auto Uplink)	5	8	8	16
	Fiber Ports				
PoE	10Gig Module Bays				
	# of PoE ports			8	
	# of PoE+ (802.3at) ports			8	
	# of PD port			-	
Scalability	Total PoE Power Budget (Watts)			120W	
	# MAC Addresses	2,000	4,000	4,000	8,000
	MAC Address Aging (sec)	typical 300sec		300 sec	typical 300sec
Quality of Service	Number of Priority Queues	4	4	4	4
	Traffic Prioritization	Honors 802.1p priority tags	Honors 802.1p priority tags	Honors 802.1p priority tags	Honors 802.1p priority tags
	Auto Voice VLAN				
Multicast Filtering	802.1p-based QoS/CoS Supported				
Multicast Filtering	IGMP Snooping Version				
Performance	Bandwidth	10 Gbps	16 Gbps	16 Gbps	256 KB Per System
	Buffer Memory	9,216 bytes	9,720 bytes	192 KB	9,216 bytes
	Jumbo Frames	•	•	9,216 bytes	•
Energy Efficiency	IEEE 802.3az	•	•	•	•
	Auto Port Power Down	•	•	•	•
	Max Power Consumption	2.7 Watts	4.92 Watts	130 Watts	11.8 Watts
	Short Cable Detection/ Power Saving			•	
Physical	Power Adapter / DC Input (V/A)			External Input 54V 2.4A Input 54V 1.66A Input 54V 1.25A	
	Desktop/Rackmount/Click	D	D	D/R/Wall-mount	R
	Metal/Plastic Enclosure	M	M	M	M
	MTBF at 25°C	3,197,945 Hours	9,727,733 Hours	2752476 hours	441,123 Hours
	Acoustic Noise	0dB	0dB	0dB	0dB
	Fan	None	None	None	None
	Width x Depth x Height	94 x 100 x 27 mm (3.7 x 3.9 x 1.1 in.)	158 x 102 x 27 mm (6.2 x 4.0 x 1.1 in.)	236 x 102 x 27 mm (9.29 x 4.02 x 1.06 in)	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in.)
	Weight	0.264 kg (0.58 lb)	0.52 kg (1.15 lb)	0.59 kg (1.30 lb)	1.47 kg (3.57 lb)
	Electromagnetic Compliance	Class (A or B)	B	B	A
	Warranty Hardware	Lifetime	Lifetime	Lifetime	Lifetime
Warranty Power Supply	2 Year	2 Year	2 year	Lifetime	
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0S11	PMB0S11	PMB0S12	PMB0S12
	OnCall 24x7 3-year	PMB0S31	PMB0S31	PMB0S32	PMB0S32
	OnCall 24x7 5-year	PMB0S51	PMB0S51	PMB0S52	PMB0S52

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS305	GS308	GS305P	GS308P
Port Configuration	10/100M Ports (Auto Uplink)	10/100/1000M Ports (Auto Uplink)	10/100/1000M Ports (Auto Uplink)	10/100/1000M Ports (Auto Uplink)
	5	8	5	8
PoE	-	-	4	4
	-	-	-	-
	-	-	-	-
	-	-	55.5W	53W
Scalability	MAC Address Table Size (# MAC) (1K=1024)	2K	8K	4K
	300 sec	300 sec	300 sec	300 sec
Quality of Service	802.1p-based QoS/CoS Supported	•	•	•
Performance	Total Bandwidth (Non-Blocking Fabric) (Gbps)	10 Gbps	16 Gbps	10 Gbps
	128 KB	128 KB	128KB	192 KB
	9,216 bytes	9,216 bytes	9,720 bytes	9,720 bytes
Energy Efficiency	IEEE 802.3az (Energy Efficient Ethernet)	•	•	•
	•	•	•	•
	•	•	•	•
	External Input: 5V/0.7A	External Input: 12V/0.5A	External Input: 48V/1.25A	External Input: 48V/1.25A
	2.34W	3.52W	7.0W (no PoE) 60.0W (with PoE max)	7.0W (no PoE) 60.0W (with PoE max)
Physical	Form-factor/Mounting (Desktop, Wall, Rack)	Desktop, Wall-mount	Desktop, Wall-mount	Desktop, Wall-mount
	Metal/Plastic Enclosure	Metal	Metal	Metal
	Fan	None	None	None
	Acoustic Noise	0dB	0dB	0dB
	MTBF (hours) @ 25°C	3,670,230 @ 25°C 1,376,286 @ 45°C	1,528,321 @ 25°C 877,807 @ 45°C	2,244,211 @ 25°C 1,164,566 @ 45°C
	Width x Depth x Height (mm)	101 x 94 x 29 mm (4.0 x 3.7 x 1.1 in)	158 x 101 x 29 mm (6.2 x 4.0 x 1.1 in)	158 x 101 x 29 mm (6.2 x 4.0 x 1.1 in)
	Weight (kg)	0.24 kg (0.53 lb)	0.38 kg (0.84 lb)	0.46 kg (1.02 lb)
	Electromagnetic Compliance (Class A or B)	B	B	A
Warranty	Hardware/Switch	3 year	3 year	3 year
	Power Adapter	Same as switch	Same as switch	Same as switch
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0S11	PMB0S11	PMB0S11
	OnCall 24x7 3-year	PMB0S31	PMB0S31	PMB0S31
	OnCall 24x7 5-year	PMB0S51	PMB0S51	PMB0S51

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS316	GS324	GS348	GS908
Port Configuration	10/100M Ports (Auto Uplink)	10/100/1000M Ports (Auto Uplink)	10/100/1000M Ports (Auto Uplink)	10/100/1000M Ports (Auto Uplink)
	16	24	48	8
PoE	-	-	-	-
	-	-	-	-
	-	-	-	-
	-	-	-	-
Scalability	MAC Address Table Size (# MAC) (1K=1024)	16K	8K	16K
	300 sec	300 - 600 sec	300 - 600 sec	typical 300 sec
Quality of Service	802.1p-based QoS/CoS Supported	•	•	•
	Traffic Prioritization	•	•	•
Performance	Total Bandwidth (Non-Blocking Fabric) (Gbps)	32 Gbps	48 Gbps	96 Gbps
	768 KB	512 KB	1.5MB	128 KB
	9,216 bytes	9,216 bytes	9,216 bytes	9,216 bytes
Energy Efficiency	IEEE 802.3az (Energy Efficient Ethernet)	•	•	•
	•	•	•	•
	•	•	•	•
	External Input: 12V/1.0A	Internal 100-240VAC 50/60Hz 1.0A max	Internal 100-240VAC 50/60Hz 1.0A max	External 100-240VAC 50-60Hz 1.0A max
	8.4W	11.1W	23W	3.1W
Physical	Form-factor/Mounting (Desktop, Wall, Rack)	Desktop, Wall-mount	Desktop, Wall-mount, Rack-mount	Desktop, Rack-mount
	Metal/Plastic Enclosure	Metal	Metal	Plastic
	Fan	None	None	None
	Acoustic Noise	0dB	0dB	0dB
	MTBF (hours) @ 25°C	9,041,798 @ 25°C 3,737,069 @ 45°C	620,798 @ 25°C 206,304 @ 55°C	620,798 @ 25°C 206,304 @ 55°C
	Width x Depth x Height (mm)	286 x 101 x 26 mm (11.3 x 4.0 x 1.0 in)	252 x 180 x 44 mm (9.9 x 7.1 x 1.7 in)	440 x 204 x 44 mm (17.3 x 8 x 1.7 in)
	Weight (kg)	0.84 kg (1.86 lb)	1.31 kg (2.90 lb)	3.15kg (6.90 lb)
	Electromagnetic Compliance (Class A or B)	A	A	B
Warranty	Hardware/Switch	3 year	3 year	3 year
	Power Adapter	Same as switch	Same as switch	Same as switch
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0S12	PMB0S12	PMB0S11
	OnCall 24x7 3-year	PMB0S32	PMB0S32	PMB0S31
	OnCall 24x7 5-year	PMB0S52	PMB0S52	PMB0S51

Unmanaged Switches

Unmanaged, L2, 10G/Multi-Gig Switches



MODEL	XS505M	XS508M	GS110MX	
Port Configuration	10/100M Ports (Auto Uplink)	0	0	
	10/100/1000M Ports (Auto Uplink)	0	8	
	10M/100M/1G/2.5G/5G/10G Copper Ports	4	7	2 (without 10M)
	10G SFP+ Fiber Ports	1	1	
PoE	# of PoE ports	-	-	
	# of PoE+ (802.3at) ports	-	-	
	# of PD port	-	-	
	Total PoE Power Budget (Watts)	-	-	
Scalability	MAC Address Table Size (# MAC) (1K=1024)	2K	2K	16K
	MAC Address Aging (typical, sec)	300 sec	300 sec	300 sec
Quality of Service	802.1p-based QoS/CoS Supported	•	•	•
Performance	Total Bandwidth (Non-Blocking Fabric) (Gbps)	100 Gbps	160 Gbps	56 Gbps
	Buffer Memory (Packet Buffer Size)	128 KB	128 KB	128 KB
	Jumbo Frames	9216bytes	9216bytes	10240bytes
Energy Efficiency	IEEE 802.3az (Energy Efficient Ethernet)	•	•	•
	Auto Power Down	•	•	•
	Short Cable Detection/Power Saving	•	•	•
	Power Adapter / DC Input (V/A)	Internal 100-240VAC 50/60Hz 1.0A	Internal 100-240VAC 50/60Hz 1.5A	External Input 12V 1.5A
Physical	Max Power Consumption (W) DC in (ext PA) / AC in (internal)	22.5W	39W	13.2W
	Form-factor/Mounting (Desktop, Wall, Rack)	Desktop / Rack-mount	Desktop / Rack-mount	Desktop Wall-mount Rack-mount
	Metal/Plastic Enclosure	Metal	Metal	Metal
	Fan	None	None	None
	Acoustic Noise	28.8dB	28.8dB	0dB
	MTBF (hours) @ 25°C	1093237 hours	1145157 hours	2320394
	Width x Depth x Height (mm) (12.91 x 6.65 x 1.7 in)	328 x 169 x 43.2 mm	328 x 169 x 43.2 mm	236 x 102 x 27 mm (9.29 x 4.02 x 1.06 in)
	Weight (kg)	1.38kg	1.49kg	0.74 kg
	Electromagnetic Compliance (Class A or B)	B	B	
	Warranty	Hardware/Switch	Lifetime	Lifetime
Power Adapter				
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0311	PMB0311	PMB0512
	OnCall 24x7 3-year	PMB0331	PMB0331	PMB0532
	OnCall 24x7 5-year	PMB0351	PMB0351	PMB0552

WHY SMART SMBs CHOOSE SMART MANAGED PLUS SWITCHES

Smart Managed Plus switches are the ideal solution for small and medium organizations looking to step up from unmanaged switches and go beyond simple network connectivity.

NETGEAR Gigabit Smart Managed Plus Switches deliver network monitoring, traffic prioritization and network segmentation to small businesses who want more visibility and control on top of plug-and-play connectivity. Easy-to-use web browser-based management GUI makes advanced setup simple.

They also come with leading ProSAFE Lifetime Hardware Warranty, Lifetime Technical Support through online chat, and Lifetime Next Business Day hardware replacement for utmost peace of mind.

Discover the 10 reasons why our customers love NETGEAR Smart Managed Plus Switches

- Market's widest product portfolio**

NETGEAR gets you covered with a comprehensive and versatile portfolio of Smart Managed Plus switches including 1-Gigabit, Multi-Gigabit, 10-Gigabit connectivity, a large range of PoE/PoE+ budgets and choice of copper or fiber for flexible deployment.
- Unique Mounting Form Factors (Click, Easy-Mount)**

NETGEAR Smart Managed Plus Click & Easy-Mount Switches feature an innovative mounting system that allow them to be easily located where you need them - under a table, on a pole/desk leg, or on the wall - with their flexible mounting bracket. Their unique slim and sleek design also enables "out of sight" deployment like no other switch does.
- Know what's happening in your Network**

Identify any possible cable issues or abnormal traffic behavior with cable health test and port statistics
- Secure your Network**

Add protection to your network against possible threats thanks to Auto DoS and Storm Control features. Moreover, you can isolate the different networks (voice, video, data) using VLANs.
- Full 10-Gigabit models**

NETGEAR is leading by far the 10-Gigabit switching market and provides a full range of 10G Smart Switches with low-latency, line-rate 10G Copper "BASE-T" technology with backward compatibility to Fast Ethernet (depending on model) and Gigabit Ethernet.
- Smart IT, not big IT**

Easy-to-use web browser-based management GUI makes setup and management simple. Get the smart features with the easiest management.
- Easy-to-Configure**

Intuitive GUI interface with Basic Configuration Modes to help any customer to configure any network protocol.
- Power it all**

Choose from the broadest choice of PoE/PoE+ power to enable seamless PoE connection of standard PoE devices (IP Phones, Wireless Access Points, IP Cameras even high-power Pan-Tilt-Zoom models, IoT devices, etc).
- Plus Redundancy**

Smart Managed Plus Switches provide link redundancy with static LAG support and Loop Prevention to minimize possible downtimes.
- Best-in-Class Warranty**

All NETGEAR Smart Managed Plus are covered for the full life of the hardware, including next business-day replacement. In addition, all NETGEAR switches with ProSAFE Lifetime Warranty include 90 days of technical support via phone and lifetime support through online chat.

Smart Managed Plus Switches

Smart Managed Plus, L2, Gigabit



MODEL	GS105EV2	GS105PE	GS108E	GS108PE	GS116Ev2
Port Configuration	10/100 RJ45 Ports (Auto Uplink)				
	5	5	8	8	16
	1G/10GBASE-T RJ45 Ports (Auto Uplink)				
	Fiber Ports				
10Gig Module Bays					
PoE	PoE (15.4W) 802.3af Ports		2		4(53W)
	Total PoE/PoE+ Power Budget		PoE pass-thru: - With AT in: 19.0W - With AF in: 7.9W		45W
Scalability	# MAC Addresses	8,000	8,000	4,000	4,000
	ARP Table – Size of	16,000			
System Management	Single IP Management				
	Web Managed/GUI	Starting v1.3.0.1	Starting v1.3.0.1	•	•
	DHCP (Client/Server)	DHCP Client	DHCP Client	DHCP Client	DHCP Client
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One	Many-to-One
Quality of Service	Number of Priority Queues	4	4	4	4
	Traffic Prioritization	802.1p, Port-based and DSCP	802.1p, Port-based and DSCP	802.1p, Port-based	802.1p, Port-based and DSCP
Multicast Filtering	IGMP Snooping Version	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3
	Bandwidth	10 Gbps	10 Gbps	16 Gbps	32 Gbps
	Buffer Memory	128 KB	128 KB	192 KB	192 KB
	Jumbo Frames	9216	9216	9720	9720
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64	64	32	32
	Port Trunking/Link Aggregation (Manual Static LAGs)	•			
	Rate Limiting	•	•	•	•
	Broadcast Storm Control	•	•	•	•
Energy Efficiency	IEEE 802.3az	•	•	•	•
	Auto Port Power Down	•	•	•	•
	Max Power Consumption	2.6 Watts	1.95 Watts (no PoE) 21.95 Watts (with PoE max)	4.45 Watts	51.1 Watts
Physical	Desktop (D)/Wallmount (W)/Rackmount (R)	D / W	D / W	D / W	D / W
	Metal/Plastic Enclosure	M	M	M	M
	MTBF at 25°C	5,905,968 Hours	1,685,972 hours	2,525,259 Hours	1,242,394 Hours
	Acoustic Noise	0 dBA	0 dBA	0 dBA	0 dBA
	Fan	•			
	Width x Depth x Height	94 x 100 x 27 mm (3.7 x 3.9 x 1.1 in)	158 x 100 x 27 mm (6.2 x 3.9 x 1.1 in)	158 x 101 x 29 mm (6.2 x 4 x 1.1 in)	158 x 101 x 29 mm (6.2 x 4 x 1.1 in)
Electromagnetic Compliance	Weight	0.25 kg (0.55 lb)	0.47 kg (1.04 lb)	0.50 kg (1.10 lb)	0.54 kg (1.19 lb)
	Class (A or B)	B	B	B	A
Warranty Hardware	Lifetime				
Warranty Power Supply	2 Year				
Modules	ProSUPPORT Maintenance PKGS				
	OnCall 24x7 1-year	PMB0S11	PMB0S11	PMB0S11	PMB0S11
	OnCall 24x7 3-year	PMB0S31	PMB0S31	PMB0S31	PMB0S31
OnCall 24x7 5-year	PMB0S51	PMB0S51	PMB0S51	PMB0S51	

Smart Managed Plus Switches

Smart Managed Plus, L2, Gigabit



MODEL	GS908E	JGS516PE	JGS524Ev2	JGS524PE	GS750E
Port Configuration	10/100 RJ45 Ports (Auto Uplink)				
	8	16	24	24	
	1G/10GBASE-T RJ45 Ports (Auto Uplink)				
	Fiber Ports				
	10Gi/Multi-Gig				
	USB Charging ports				
PoE	PoE (15.4W) 802.3af Ports		8(85W)		12(100W)
	Total PoE/PoE+ Power Budget		8(85W)		12(100W)
Scalability	# MAC Addresses	4K	16,000	16,000	16,000
	Dynamic MAC	•	•	•	•
System Management	ARP Table – Size of				
	Single IP Management				
	Web Managed/GUI	•	Starting v2.0.1.8	•	•
	DHCP (Client/Server)	Client	DHCP Client	DHCP Client	DHCP Client
Quality of Service	Port Mirroring	•	Many-to-One	Many-to-One	Many-to-One
	Number of Priority Queues	4	4	4	8
Multicast Filtering	Traffic Prioritization	802.1p-based (CoS)	802.1p, Port-based	802.1p, Port-based	802.1p-based (CoS)
	Auto Voice VLAN	• (Manual)	•	•	•
	IGMP Snooping Version	v1, v2, and v3	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3
	Bandwidth	16.0	32 Gbps	48 Gbps	48 Gbps
Performance	Buffer Memory	192KB	768 KB	768 KB	1.5MB
	Jumbo Frames	9216	9216	9216	9216
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64	100	100	4K
	Port Trunking/Link Aggregation (Manual Static LAGs)	Static	Static LAG	Static LAG	Static LAG
	Discovery Protocol LLDP	•	•	•	•
	Rate Limiting	•	•	•	•
Energy Efficiency	Broadcast Storm Control	•	•	•	•
	IEEE 802.3az	•	•	•	•
	Auto Port Power Down	•	•	•	•
Physical	Dynamic Power Consumption	•	•	•	•
	Max Power Consumption	*3.30W (no USB) 26.32W (with both USB)*	25.0W (no PoE) 110.0W (with PoE max)	13.8 Watts	123 Watts
	Desktop/Rackmount/Click	Desktop	R	R	R
	Metal/Plastic Enclosure	Premium Plastic	M	M	M
	MTBF at 25°C	840,354 Hours		243,476 Hours	643,506 Hours
	Acoustic Noise	0	24.5 dBA		24.4 dBA
Electromagnetic Compliance	Fan	Fanless	1	None	1
	Width x Depth x Height	234 x 164 x 33 mm (9.22 x 6.46 x 1.29 in)	328 x 169 x 43 mm (12.9 x 6.65 x 1.7 in)	328 x 170 x 43 mm (12.9 x 6.9 x 1.7 in)	328 x 169 x 43 mm (12.9 x 6.65 x 1.7 in)
	Weight	0.36 kg (0.80 lb)	1.67 kg (3.68 lb)	1.4 kg (3.09 lb)	1.84 kg (4.06 lb)
	Class (A or B)	B	A	A	A
Warranty Hardware	3 years				
Warranty Power Supply	2 years				
Modules	ProSUPPORT Maintenance PKGS				
	OnCall 24x7 1-year	PMB0S11	PMB0S12	PMB0S12	PMB0S12
	OnCall 24x7 3-year	PMB0S31	PMB0S32	PMB0S32	PMB0S32
OnCall 24x7 5-year	PMB0S51	PMB0S52	PMB0S52	PMB0S52	

Smart Managed Plus Switches

Smart Managed Plus, L2, Multi-Gig

Smart Managed Plus, L2, 10-Gigabit



MODEL	GS110EMX	XS512EM	XS724EM	XS708Ev2	XS716E	
Port Configuration	100M/1G/2.5G/5G/10G RJ-45 copper ports	12	24			
	10/100/1000 RJ45 Ports (Auto Uplink)	8				
	1G/10GBASE-T RJ45 Ports (Auto Uplink)			8	16	
	Fiber Ports		10G SFP+ ports: 2(shared)	10G SFP+ ports: 2(shared)	1 Combo SFP+ (10G)	1 Combo SFP+ (10G)
Scalability	10Gi/Multi-Gig	2	•	•	1	
	# MAC Addresses	16K	32K	32K	32,000	32,000
System Management	Dynamic MAC	•	•	•		
	Single IP Management	•				
	Web Managed/GUI	•	•	•	•	•
	DHCP (Client/Server)	Client	•	•	DHCP Client	DHCP Client
Quality of Service	Port Mirroring	•	•	•	Many-to-One	Many-to-One
	Number of Priority Queues	8	8 (WRR)	8 (WRR)	4	4
	Traffic Prioritization	802.1p-based (CoS)	•	•	802.1p, Port-Based	802.1p, Port-Based
Multicast Filtering	Auto Voice VLAN	• (Manual)	•	•		
	IGMP Snooping Version	v1, v2, and v3	v1, v2, and v3	v1, v2, and v3	v1, v2 and v3	v1, v2 and v3
Performance	Bandwidth	56.0	240 Gbps	480 Gbps	160 Gbps	160 Gbps
	Buffer Memory	2MB	3MB	3MB	16 MB	16 MB
	Jumbo Frames	10240	up to 9K	up to 9K	•	•
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64	64	64	64	64
	Port Trunking/Link Aggregation (Manual Static LAGs)	Static, LACP	•	•	Static LAG	Static LAG
	Rate Limiting	•	Ingress and egress	Ingress and egress	•	•
	Broadcast Storm Control	•	•	•	•	•
Energy Efficiency	IEEE 802.3az	•	•	•		
	Auto Port Power Down	•				
	Dynamic Power Consumption	•				
	Max Power Consumption	15.6 Watts	76.56W	150.52W	44 Watts	62 Watts
Physical	Desktop/Rackmount/Click	Desktop/Rackmount	Desktop/Rackmount	Desktop/Rackmount	R	R
	Metal/Plastic Enclosure	Metal	Metal	Metal	M	M
	MTBF at 25°C		1,113,477Hrs	830,493Hrs	221,813 Hours	221,813 Hours
	Acoustic Noise	0	Idle : 29.13dB@25dC/ Full load :40.85dB@50dC*	Idle : 35.91dB@25dC Full load :56.87dB@50dC*	34.7dBA	34.7dBA
	Fan	Fanless	2	3	2	2
	Width x Depth x Height	236x 102x 27mm 9.29 x 4.02 x 1.06 in	328 x 204 x 43 mm (12.9 x 8.0 x 1.7 in)	440 x 204 x 43 mm (17.3 x 8.0 x 1.7 in)	330 x 207 x 43 mm (13 x 8.2 x 1.7 in)	330 x 207 x 43 mm (13 x 8.2 x 1.7 in)
Weight	0.75kg 1.65 lb	2.51kg (5.54 lb)	3.72kg (8.21 lb)	3.6 kg (6.5 lb)	3.6 kg (6.5 lb)	
Electromagnetic Compliance	Class (A or B)	B	A	A	A	A
Warranty Hardware	Lifetime	ProSAFE Lifetime Warranty	ProSAFE Lifetime Warranty	Lifetime	Lifetime	Lifetime
Warranty Power Supply	2 years			Lifetime	Lifetime	Lifetime
Modules			AGM731, AGM732F, AGM734 AXC761, AXC763, AXM761 AXM762, AXM763, AXM764	AGM731, AGM732F, AGM734 AXC761, AXC763, AXM761 AXM762, AXM763, AXM764	AGM731F/AGM732F; AXM761/ AXM762/AXM763	AGM731F/AGM732F; AXM761/ AXM762/AXM763
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0512 PMB0532 PMB0552	PMB0312 PMB0332 PMB0352	PMB0312 PMB0332 PMB0352	PMB0311 PMB0331 PMB0351	PMB0312 PMB0332 PMB0352

Smart Managed Plus Switches

Gigabit Ethernet, L2,
Smart Managed Plus ClickGigabit Ethernet, L2
Smart Managed Plus Easy
Mount

MODEL	GSS108E	GSS116E	GSS108EPP	GS408EPP	
Port Configuration	10/100 RJ45 Ports (Auto Uplink)				
	10/100/1000 RJ45 Ports (Auto Uplink)	8	16	8	
	1G/10GBASE-T RJ45 Ports (Auto Uplink)				
	Fiber Ports				
PoE	10Gig Module Bays				
	PoE+ (30W) 802.3at Ports		4-ports 47W	8-ports 124W	
Scalability	Total PoE/PoE+ Power Budget				
	# MAC Addresses	8,000	8,000	4000	
System Management	ARP Table – Size of				
	Single IP Management				
	Web Managed/GUI	•	•	•	
	DHCP (Client/Server)	DHCP Client	DHCP Client	DHCP Client	DHCP Client
Quality of Service	Port Mirroring	Many-to-One	Many-to-One	Many-to-One	
	Number of Priority Queues	4	4	4	
	Traffic Prioritization	802.1p, Port-based	802.1p, Port-based	802.1p, Port-based	802.1p, Port-based
Multicast Filtering	Auto Voice VLAN				
	IGMP Snooping Version	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3	
Performance	Bandwidth	16 Gbps	32 Gbps	16 Gbps	
	Buffer Memory	128 KB	512 KB	192 KB	
	Jumbo Frames	9216	9216	9216	
	Number of 802.1q VLAN/Number of VLAN Group	64	128	64	
Traffic Management	Port Trunking/Link Aggregation (Manual Static LAGs)		Static LAG	Static LAG	
	Rate Limiting	•	•	•	
	Broadcast Storm Control	•	•	•	
Energy Efficiency	IEEE 802.3az	•	•	•	
	Auto Port Power Down	•	•	•	
	Dynamic Power Consumption	•	•	•	
	Max Power Consumption	4.2W (No USB Charging) 20.2W (USB Charging)	8.4 Watts	57.4W	148W
Physical	Desktop (D)/Wallmount (W)/Rackmount (R)	D/W/Virtually Anywhere	D/W/Virtually Anywhere	D/W/Virtually Anywhere	D/W/Virtually Anywhere/Rackmount
	Metal/Plastic Enclosure	P	M	M	M
	MTBF at 25°C	1,031,177 Hours	721,497 Hours	1,494,913 hours	26.9dB Low acoustics
	Acoustic Noise	0	0	0	0
	Fan		None		
	Width x Depth x Height	305x 65x 35 mm (12.0 x 2.6 x 1.4 in)	407x70x35 mm (16.0 x 2.8 x 1.4 in)	305 x 65 x 35mm (12 x 2.6 x 1.4in)	380 x 100 x 43mm (15.0 x 3.9 x 1.7in)
Weight	0.4 kg (0.88 lbs)	1.3 kg (2.87 lb)	3.20kg (7.07lb)	1.6kg (3.53lb)	
Electromagnetic Compliance	Class (A or B)	B	B	B	A
Warranty Hardware	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime
Modules					
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0511 PMB0531 PMB0551	PMB0512 PMB0532 PMB0552	PMB0512 PMB0532 PMB0552	PMB0512 PMB0532 PMB0552

WHY SMART BUSINESSES CHOOSE SMART MANAGED PRO SWITCHES

The Smart switch category was created by NETGEAR more than 12 years ago which has become the largest and fastest growing segment of the SMB switch market. NETGEAR is the undisputed market leader in switching, having built the widest most affordable business-grade portfolio in the market. Smart switches are the ideal solution for the most advanced small and medium organizations looking for the best combination of features, performance, and value.

NETGEAR Smart Managed Pro Switches offer powerful L2 and lite L3 switching features, great Power-over-Ethernet (PoE) functionality, intuitive management, full scalability and enhanced performance and usability. They are purposely designed for converged networks where voice, video, data are all carried on a single network platform. These switches are optimized for network efficiency, operational cost savings, and ease of management.

They also come with leading ProSAFE Lifetime Hardware Warranty, Lifetime Technical Support through online chat and Lifetime Next Business Day hardware replacement for utmost peace of mind.

Discover the 10 reasons why our customers love NETGEAR Smart Managed Pro Switches

1	Market's widest product portfolio	NETGEAR covers you with a comprehensive and versatile portfolio of Smart Managed switches from 5 to 48 port models including 1-Gigabit and 10-Gigabit connectivity with enhanced stacking capabilities, a large range of PoE/PoE+ budgets and choice of copper or fiber for flexible deployment.
2	Affordable Business-grade Switches	Typically 1/2 the cost of Managed switches with around 75% of the same features and functions, all with no hidden costs.
3	Rich feature-set	Advanced VLAN and QoS, Advanced Security, L3 lite routing capabilities, ACL or SNMP are some of the many features that are available in Smart Managed switches.
4	Scales with your Business	The Stackable Smart Managed Switches provide true stacking capability with high performance, scalability and reliability without adding huge costs. Up to six Switches can be stacked together, providing up to 288 ports, and managed from a single IP address.
5	Full 10-Gigabit models	NETGEAR is leading by far the 10-Gigabit switching market and provides a full range of 10G Smart Switches with low-latency, line-rate 10G Copper "BASE-T" technology with backward compatibility to Fast Ethernet (depending on model) and Gigabit Ethernet.
6	Smart IT, not big IT	Easy-to-use web browser-based management GUI makes setup and management simple. Get the smart features with the easiest management.
7	Designed as a Core Switch for SMB Networks	Powerful L2+/Layer 3 Lite features make them the most cost-effective core switches for SMB and virtualization environment.
8	Power it all	Choose from the broadest choice of PoE/PoE+ power to enable seamless PoE connection of standard PoE devices (IP Phones, Wireless Access Points, IP Cameras even high-power Pan-Tilt-Zoom models, IoT devices, etc).
9	Smart redundancy	Smart switches mean smart redundancy with Link protection, Spanning Tree, LACP, switch protection, resilient stacking.
10	Future-proof	Full support of IPv6 protects IT investment by future-proofing the network for the next generation of applications and extensions.

Smart Managed Pro Switches

Smart Managed Pro, L2, 10/100 Fast Ethernet



MODEL	FS728TLP	FS728TPv2
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	24
	10/100/1000 RJ45 Ports (Auto Uplink)	4
	Fiber Ports	2 SFP
PoE	Power Over Ethernet 802.3af Ports	12
	PoE Plus (30W) 802.3at Ports	
	Total PoE Budget	100 Watts
Stacking	Number of Dedicated Stacking Ports	
	Stacking Bandwidth	
	Stacking (maximum capacity)	
	Stacking Compatibility	
Scalability	# MAC Addresses	8,000
	# ACL Rules	128
System Management	Web Managed/GUI	•
	SNMP Version	v1, v2c, v3
	RMON Group	1,2,3,9
	DHCP (Client/Server)	Client
	Port Mirroring	Many-to-One
		Many-to-One
Quality of Service	Number of Priority Queues	8
	Traffic Prioritization	802.1p and DSCP
	Auto Voice VLAN	•
Multicast Filtering	IGMP Snooping Version	v1, v2, v3
	IGMP Snooping Querier	•
Performance	Bandwidth	12.8 Gbps
	Buffer Memory	4 MB Per System
	Jumbo Frames	•
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s
	RPS Redundant Power Supply	
	Modular Power Supply	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	128
	Link Agregation 802.3ad/LACP	•
	Discovery Protocol LLDP 802.1ab	•
	Rate Limiting	•
	Broadcast Storm Control	•
L3 Routing	IPv4 Static Routing	
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	
	IPv6 Static Routing, IPv6 OSPFv3	
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	
Security	IEEE 802.1x (RADIUS)	Supports
	ACL - Access Control Lists	MAC, IP
	SSL/SSH & HTTPS	•
	Guest VLAN	•
	DHCP Snooping/IP Source Guard/ARP Guard	
	TACACS+	•
Energy Efficiency	IEEE 802.3az	•
	Auto Port Power Down	•
	Dynamic Power Consumption	
	Max Power Consumption	124 Watts
Physical	Desktop/Rackmount/Click	R
	Metal/Plastic Enclosure	M
	MTBF	755,725 Hours
	Acoustic Noise at 25°C	30.7 dBA
	Fan	•
	Width x Depth x Height	440 x 204 43 mm (17.3 x 8 x 1.7 in)
	Weight	2.92 kg (6.44 lb)
	Class (A or B)	A
Electromagnetic Compliance		
Warranty Hardware	Lifetime	
Warranty Power Supply	Lifetime	
Modules	AGM731F/732F	
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0311
	OnCall 24x7 3-year	PMB0331
	OnCall 24x7 5-year	PMB0351

Smart Managed Pro Switches

Smart Managed Pro, L2, Gigabit



MODEL	GS108Tv2	GS110TPv2	GS716Tv3	GS516TP
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	8	8	16
	Fiber Ports		2 SFP	2 dedicated SFP
PoE	Power Over Ethernet 802.3af Ports		8	8 POE and 2 PD
	PoE Plus (30W) 802.3at Ports			
	Total PoE Budget		46 Watts	76w with AC power, up to 22w with PD power
Scalability	# MAC Addresses	8,000	8,000	16,000
	ARP Table – Size of			512
	# Routing Entries			32
	# ACL Rules	64	64	100
System Management	Web Managed/GUI	•	•	•
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
	RMON Group	1,2,3,9	1,2,3,9	1,2,3,9
	DHCP (Client/Server)	Client	Client	Client
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One
	IPv6 full set	•	•	•
	Quality of Service	Number of Priority Queues	4	4
Traffic Prioritization	802.1p, DSCP, Diffserv	802.1p, DSCP, Diffserv	802.1p, DSCP, Diffserv	802.1p, DSCP, Diffserv
Multicast Filtering	Auto Voice VLAN	•	•	•
	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3
Performance	IGMP Snooping Querier	•	•	•
	Bandwidth	16 Gbps	16 Gbps	32 Gbps
	Buffer Memory	512 KB Per Unit	512 KB Per Unit	2 MB Per System
Availability	Jumbo Frames	Yes	Yes	•
	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64	64	256
	Link Aggregation 802.3ad/LACP	•	•	•
	Discovery Protocol LLDP 802.1ab	•	•	•
	Rate Limiting	•	•	•
	Broadcast Storm Control	•	•	•
	L3 Routing	IPv4 Static Routing	•	•
Security	IEEE 802.1x (RADIUS)	•	•	•
	ACL - Access Control Lists	MAC, IP	MAC, IP	MAC, IP
	SSL/SSH & HTTPS	HTTPS	HTTPS	SSL/HTTPS
	Guest VLAN	•	•	•
	DHCP Snooping/IP Source Guard/ARP Guard	•	•	•
Energy Efficiency	TACACS+	•	•	•
	IEEE 802.3az	•	•	•
	Auto Port Power Down	•	•	•
	Dynamic Power Consumption	•	•	•
Physical	Max Power Consumption	12.78 Watts if powered by PoE via port 18.3 Watts (AC) 6 Watts (DC)	60 Watts	14.4 Watts
	Desktop/Rackmount/Click	D	D	R
	Metal/Plastic Enclosure	M	M	M
	MTBF	275,533 Hours	157,004 Hours	726,612 hours
	Acoustic Noise at 25°C	0 dBA	0 dBA	0 dBA
	Fan	•	•	•
	Width x Depth x Height	158 x 105 x 27 mm (6.22 x 4.13 x 1.06 in)	236 x 101.6 x 27 mm (9.3 x 4 x 1.06 in)	43 x 440 x 204 mm (1.7 x 17.3 x 8 in)
	Weight	0.56 kg (1.23 lb)	0.7Kg (1.54 lb)	2.72 kg (5.99 lb)
	Electromagnetic Compliance	Class (A or B)	A	A
	Warranty Hardware	Lifetime	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime	Lifetime	
Modules	ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0511 PMB0531 PMB0551	PMB0512 PMB0532 PMB0552
				PMB0311 PMB0331 PMB0351

Smart Managed Pro Switches

Smart Managed Pro, L2+ with static routing, Gigabit



MODEL	GS510TLP	GS510TPP	GS418TPP	
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	8	8	
	Fiber Ports	2	2	
PoE	Power Over Ethernet 802.3af Ports			
	PoE Plus (30W) 802.3at Ports	8	8	
	Total PoE Budget	75W	190W	
Scalability	# MAC Addresses	16K	16K	
	ARP Table – Size of	479	479	
	# Routing Entries	32	32	
	# ACL Rules	100	100	
System Management	Single IP Management	•	•	
	Web Managed/GUI	Yes	Yes	
	SNMP Version	v1, v2c, v3	v1, v2c, v3	
	RMON Group	Yes	Yes	
	DHCP (Client/Server)	Client	Client	
	Port Mirroring	Yes	Yes	
	IPv6 full set	Yes	Yes	
Quality of Service	Number of Priority Queues	8	8	
	Traffic Prioritization	802.1p, DSCP, Diffserv	802.1p, DSCP, Diffserv	
	Auto Voice VLAN	•	•	
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	
	IGMP Snooping Querier	•	•	
Performance	Bandwidth	20 Gbps	20 Gbps	
	Buffer Memory	1.5 MB per system	1.5 MB per system	
	Jumbo Frames	•	•	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	
	Number of 802.1q VLAN/Number of VLAN Group			
Traffic Management	Link Aggregation 802.3ad/LACP	•	•	
	Discovery Protocol LLDP 802.1ab	•	•	
	Rate Limiting	•	•	
	Broadcast Storm Control	•	•	
	L3 Routing	IPv4 Static Routing	•	•
	Security	IEEE 802.1x (RADIUS)	•	•
ACL - Access Control Lists		MAC, IP, TCP	MAC, IP, TCP	
SSL/SSH & HTTPS		SSL/HTTPS	SSL/HTTPS	
Guest VLAN		•	•	
DHCP Snooping/IP Source Guard/ARP Guard		•	•	
Energy Efficiency	TACACS+	•	•	
	IEEE 802.3az	•	•	
	Auto Port Power Down	•	•	
	Dynamic Power Consumption	•	•	
Physical	Max Power Consumption	101 W	225 W	
	Desktop/Rackmount/Click	D/R	D/R	
	Metal/Plastic Enclosure	M	M	
	MTBF	913,368 hours	1,509,979 hours	
	Acoustic Noise at 25°C	0 dBA	32 dBA	
	Fan	•	•	
	Width x Depth x Height	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)	
	Weight	1.74 kg (3.84 lb)	1.83 kg (4.03 lb)	
	Electromagnetic Compliance	Class (A or B)	A	
	Warranty Hardware	Lifetime	Lifetime	
Warranty Power Supply	Lifetime	Lifetime		
Modules	ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0512 PMB0532 PMB0552	
			PMB0311 PMB0331 PMB0351	

Smart Managed Pro Switches

Smart Managed Pro, L2+ with static routing, Gigabit



MODEL	GS724Tv4	GS748Tv5	GS728TP	GS728TPv2	GS728TPP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)				
	10/100/1000 RJ45 Ports (Auto Uplink)				
	24	48	24	24	24
PoE	Fiber Ports				
	2 dedicated SFP	2 dedicated and 2 combo SFP	4 dedicated SFP	4 dedicated SFP	4 dedicated SFP
	10Gig Module Bays				
Scalability	Power Over Ethernet 802.3af Ports				
	Power Over Ethernet 802.3at Ports				
	Total PoE Budget				
System Management	# MAC Addresses				
	# Routing Entries				
	# ACL Rules				
Quality of Service	Single IP Management				
	Web Managed/GUI				
	Command Line Interface/RS232 Console/Telnet				
Multicast Filtering	SNMP Version				
	RMON Group				
	DHCP (Client/Server)				
Performance	Port Mirroring				
	IPv6 full set				
	Number of Priority Queues				
Availability	Traffic Prioritization				
	Auto Voice VLAN				
	IGMP Snooping Version				
Traffic Management	IGMP Snooping Querier				
	Bandwidth				
	Buffer Memory				
L3 Routing	Jumbo Frames				
	Spanning Tree 802.1d/RSTP .1w/MSTP .1s				
	Number of 802.1q VLAN/Number of VLAN Group				
Security	Link Aggregation 802.3ad/LACP				
	Discovery Protocol LLDLP 802.1ab				
	Rate Limiting				
Energy Efficiency	Broadcast Storm Control				
	IPv4 Static Routing				
	IEEE 802.1x (RADIUS)				
Physical	ACL - Access Control Lists				
	SSL/SSH & HTTPS				
	Guest VLAN				
Electromagnetic Compliance	DHCP Snooping/IP Source Guard/ARP Guard				
	TACACS+				
	IEEE 802.3az				
Warranty Power Supply	Auto Port Power Down				
	Dynamic Power Consumption				
	Max Power Consumption				
Modules	Desktop/Rackmount/Click				
	Metal/Plastic Enclosure				
	MTBF				
ProSUPPORT Maintenance PKGS	Acoustic Noise at 25°C				
	Fan				
	Width x Depth x Height				
	Weight				
	Class (A or B)				
	Warranty Hardware				
	Warranty Power Supply				
	Modules				
	ProSUPPORT Maintenance PKGS				

Smart Managed Pro Switches

Smart Managed Pro, L2+ with static routing, Gigabit



MODEL	GS728TPPv2	GS752TP	GS752TPv2	GS752TPP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)			
	10/100/1000 RJ45 Ports (Auto Uplink)			
	24	48	24	24
PoE	Fiber Ports			
	10Gig Module Bays			
	Power Over Ethernet 802.3af Ports			
Scalability	Power Over Ethernet 802.3at Ports			
	Total PoE Budget			
	# MAC Addresses			
System Management	# Routing Entries			
	# ACL Rules			
	Single IP Management			
Quality of Service	Web Managed/GUI			
	Command Line Interface/RS232 Console/Telnet			
	SNMP Version			
Multicast Filtering	RMON Group			
	DHCP (Client/Server)			
	Port Mirroring			
Performance	IPv6 full set			
	Number of Priority Queues			
	Traffic Prioritization			
Availability	Auto Voice VLAN			
	IGMP Snooping Version			
	IGMP Snooping Querier			
Traffic Management	Bandwidth			
	Buffer Memory			
	Jumbo Frames			
L3 Routing	Spanning Tree 802.1d/RSTP .1w/MSTP .1s			
	Number of 802.1q VLAN/Number of VLAN Group			
	Link Aggregation 802.3ad/LACP			
Security	Discovery Protocol LLDLP 802.1ab			
	Rate Limiting			
	Broadcast Storm Control			
Energy Efficiency	IPv4 Static Routing			
	IEEE 802.1x (RADIUS)			
	ACL - Access Control Lists			
Physical	SSL/SSH & HTTPS			
	Guest VLAN			
	DHCP Snooping/IP Source Guard/ARP Guard			
Electromagnetic Compliance	TACACS+			
	IEEE 802.3az			
	Auto Port Power Down			
Warranty Power Supply	Dynamic Power Consumption			
	Max Power Consumption			
	Desktop/Rackmount/Click			
Modules	Metal/Plastic Enclosure			
	MTBF			
	Acoustic Noise at 25°C			
ProSUPPORT Maintenance PKGS	Fan			
	Width x Depth x Height			
	Weight			
	Class (A or B)			
	Warranty Hardware			
	Warranty Power Supply			
	Modules			
	ProSUPPORT Maintenance PKGS			

Smart Managed Pro Switches

Smart Managed Pro, L2+ with static routing, Gigabit



MODEL	GS752TSB	GS752TPSB	S3300-28X (GS728TX)	S3300-52X (GS752TX)
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	48	24 / 2 10GBase-T	48 / 2 10GBase-T
	Fiber Ports	4 SFP	4 SFP	2 SFP+ (10G)
PoE	Power Over Ethernet 802.3af Ports		48	
	PoE Plus (30W) 802.3at Ports		8	
	Total PoE Budget		384 Watts	
Stacking	Number of Dedicated Stacking Ports	2 SFP (2.5G)	2 SFP (2.5G)	Up to 2 10G ports
	Stacking Bandwidth	10 Gbps	10 Gbps	40 Gbps
	Stacking (maximum capacity)	6 units or 300 ports	6 units or 300 ports	6 units or 300 ports
	Stacking Compatibility	GS7XTSB/GSXXTPSB	GS7XTSB/GSXXTPSB	S3300 series, M4300-12X12F, M4300-24X
Scalability	# MAC Addresses	16,000	16,000	16,000
	ARP Table - Size of	1,024	1,024	512
	# Routing Entries	32	32	32
	# ACL Rules	256	256	480
System Management	Single IP Management	•	•	•
	Web Managed/GUI	•	•	•
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
	RMON Group	1,2,3,9	1,2,3,9	1,2,3,9
	DHCP (Client/Server/Relay)	Client	Client	Client/L2 Relay
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One
	IPv6 full set	•	•	•
Quality of Service	Number of Priority Queues	8	8	8
	Traffic Prioritization	802.1p	802.1p, DSCP	802.1p; Diffserv; TCP/UDP
	Auto Voice VLAN	•	•	•
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	•	•	•
Performance	Bandwidth	104 Gbps	104 Gbps	128 Gbps
	Buffer Memory	16 MB Per System	2 MB Per System	2 MB Per System
	Jumbo Frames	•	•	•
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	256	256	256
	Link Agregation 802.3ad/LACP	•	•	•
	Discovery Protocol LLDP 802.1ab	•	•	•
	Rate Limiting	•	•	•
	Broadcast Storm Control	•	•	•
	IPv4 Static Routing	•	•	•
	IPv4 Static Routing	•	•	•
Security	IEEE 802.1x (RADIUS)	•	•	•
	ACL - Access Control Lists	MAC, IP	MAC, IP	MAC, IP, TCP
	SSL/SSH & HTTPS	HTTPS	HTTPS	HTTPS
	Guest VLAN	•	•	•
	DHCP Snooping/IP Source Guard/ARP Guard	•	•	•
	TACACS+	•	•	•
Energy Efficiency	IEEE 802.3az	•	•	•
	Auto Port Power Down	•	•	•
	Dynamic Power Consumption	•	•	•
	Max Power Consumption	77 Watts	527 Watts	28.18 Watts
Physical	Desktop/Rackmount/Click	R	R	R
	Metal/Plastic Enclosure	M	M	M
	MTBF	303,219 Hours	206,539 Hours	278,559 hours
	Acoustic Noise at 25°C	34.8 dBA	42.7 dBA	40 dBA
	Fan	•	•	•
	Width x Depth x Height	440 x 257 x 43 mm (17.3 x 11.8 x 1.7 in)	440 x 310 x 43 mm (17.32 x 12.2 x 1.7 in)	440 x 257 x 43 mm (17.32 x 10.13 x 1.7 in)
	Weight	4.31 kg (11.38 lb)	5.48 kg (16.02 lb)	3.55 kg (7.8 lb)
	Weight	4.31 kg (11.38 lb)	5.48 kg (16.02 lb)	3.55 kg (7.8 lb)
Electromagnetic Compliance	Class (A or B)	A	A	A
Warranty Hardware	Lifetime	Lifetime	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime	Lifetime	Lifetime
Modules	AGM731F/732F/AGC761	AGM731F/732F	AGM731F/AGM732F; AXM761/AXM762/AXM763/AXM764/AXC761/AXC763/AXC761/3/5/7/10/15/20	AGM731F/AGM732F; AXM761/AXM762/AXM763/AXM764/AXM765/AXC761/3/5/7/10/15/20
	ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312 PMB0332 PMB0352	PMB0312 PMB0332 PMB0352

Smart Managed Pro Switches

Smart Managed Pro, L2+ with static routing, Gigabit



MODEL	S3300-28X-POE+ (GS728TXP)	S3300-52X-POE+ (GS752TXP)	GS752TXS
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	24 / 2 10GBase-T	48
	Fiber Ports	2 SFP+ (10G)	4 SFP+ (10G)
PoE	Power Over Ethernet 802.3af Ports	24	48
	PoE Plus (30W) 802.3at Ports	24	48
	Total PoE Budget	195 Watts / up to 740W with RPS	390 Watts / up to 1,440W with RPS
Stacking	Number of Dedicated Stacking Ports	Up to 2 10G ports	Up to 2 10G ports
	Stacking Bandwidth	40 Gbps	40 Gbps
	Stacking (maximum capacity)	6 units or 300 ports	6 units or 300 ports
	Stacking Compatibility	S3300 series, M4300-12X12F, M4300-24X	S3300 series, M4300-12X12F, M4300-24X
Scalability	# MAC Addresses	16,000	16,000
	ARP Table - Size of	512	1,024
	# Routing Entries	32	32
	# ACL Rules	480	100
System Management	Single IP Management	•	•
	Web Managed/GUI	•	•
	SNMP Version	v1, v2c, v3	v1, v2c, v3
	RMON Group	1,2,3,9	1,2,3,9
	DHCP (Client/Server/Relay)	Client/L2 Relay	Client/L2 Relay
	Port Mirroring	Many-to-One	Many-to-One
	IPv6 full set	•	•
Quality of Service	Number of Priority Queues	8	8
	Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
	Auto Voice VLAN	•	•
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	•	•
Performance	Bandwidth	128 Gbps	176 Gbps
	Buffer Memory	2 MB Per System	2 MB Per System
	Jumbo Frames	•	•
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	256	256
	Link Agregation 802.3ad/LACP	•	•
	Discovery Protocol LLDP 802.1ab	•	•
	Rate Limiting	•	•
	Broadcast Storm Control	•	•
	IPv4 Static Routing	•	•
	IPv4 Static Routing	•	•
Security	IEEE 802.1x (RADIUS)	•	•
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP
	SSL/SSH & HTTPS	HTTPS	HTTPS
	Guest VLAN	•	•
	DHCP Snooping/IP Source Guard/ARP Guard	•	•
	TACACS+	•	•
Energy Efficiency	IEEE 802.3az	•	•
	Auto Port Power Down	•	•
	Dynamic Power Consumption	•	•
	Max Power Consumption	44.12 Watts	1484.12 Watts
Physical	Desktop/Rackmount/Click	R	R
	Metal/Plastic Enclosure	M	M
	MTBF	147,965 hours	216,809 hours
	Acoustic Noise at 25°C	36.8 dBA	40 dBA
	Fan	•	•
	Width x Depth x Height	440 x 257 x 43 mm (17.32 x 10.13 x 1.7 in)	440 x 257 x 43 mm (17.32 x 10.13 x 1.7 in)
	Weight	3.77 kg (8.3 lb)	3.55 kg (7.8 lb)
	Weight	3.77 kg (8.3 lb)	3.55 kg (7.8 lb)
Electromagnetic Compliance	Class (A or B)	A	A
Warranty Hardware	Lifetime	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime	Lifetime
Modules	AGM731F/AGM732F; AXM761/AXM762/AXM763/AXM764/AXC761/3/5/7/10/15/20	AGM731F/AGM732F; AXM761/AXM762/AXM763/AXM764/AXM765/AXC761/3/5/7/10/15/20; RPS4000 (RPS only)	AGM731F/AGM732F; AXM761/AXM762/AXM763/AXM764/AXM765/AXC761/3/5/7/10/15/20; RPS4000 (RPS only)
	ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312 PMB0332 PMB0352

Smart Managed Pro Switches

Smart Managed Pro,
L2+ with static routing, Multi-Gigabit

Smart Managed Pro,
L2+ with static routing,
10-Gigabit



MODEL	MS510TX	MS510TXPP	XS708T	XS712Tv2	
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	N/A	N/A		
	10/100/1000 RJ45 Ports (Auto Uplink)	4x1G/2x2.5G/ 2x5G/1x10GBase-T	4x1G/2x2.5G/ 2x5G/1x10GBase-T	8 10GBase-T	
	Fiber Ports	1 SFP+ (10G)	1 SFP+ (10G)	2 Combo SFP+ (10G)	
	10Gig Module Bays			2 Combo SFP+ (10G)	
PoE	Power Over Ethernet 802.3af Ports				
	PoE Plus (30W) 802.3at Ports		8 (PoE+)		
	Total PoE Budget		180 Watts		
Stacking	Number of Dedicated Stacking Ports				
	Stacking Bandwidth				
	Stacking (maximum capacity)				
Scalability	Stacking Compatibility				
	# MAC Addresses	16,000	16,000	16,000	
	ARP Table – Size of	512	512	738	
	# Routing Entries	32	32	32	
	# ACL Rules	164	164	100	
System Management	Single IP Management				
	Web Managed/GUI	•	•	•	
	Command Line Interface/RS232 Console/Telnet	N/A	N/A	N/A	
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	
	RMON Group	1,2,3,9	1,2,3,9	1,2,3,9	
	DHCP (Client/Server/Relay)	Client/L2 Relay	Client/L2 Relay	Client/L2 Relay	
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One	
	IPv6 full set	•	•	•	
	Quality of Service	Number of Priority Queues	8	8	8
		Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
Auto Voice VLAN		•	•	•	
Multicast Filtering		IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	•	•	•	
Performance	Bandwidth	78 Gbps	78 Gbps	320 Gbps	
	Buffer Memory	1.5 MB Per System	1.5 MB Per System	2 MB Per System	
	Jumbo Frames	10K	10K	9K	
	Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
RPS Redundant Power Supply		N/A	N/A	N/A	
Traffic Management		Number of 802.1q VLAN/Number of VLAN Group	256	256	256
	Link Agregation 802.3ad/LACP	•	•	•	
	Discovery Protocol LLDP 802.1ab	•	•	•	
	Rate Limiting	•	•	•	
	Broadcast Storm Control	•	•	•	
	L3 Routing	IPv4 Static Routing	•	•	•
		Security	IEEE 802.1x (RADIUS)	•	•
	ACL - Access Control Lists		MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP
	SSL/SSH & HTTPS		HTTPS	HTTPS	HTTPS
	Guest VLAN		•	•	•
DHCP Snooping/IP Source Guard/ARP Guard	•		•	•	
TACACS+	•		•	•	
Energy Efficiency	Auto Port Power Down		•	•	•
	Dynamic Power Consumption		•	•	•
	Max Power Consumption		96.0W	134.9W	262.8W
	Physical		Desktop/Rackmount/Click	R	R
		Metal/Plastic Enclosure	M	M	M
	Physical	MTBF	276,832 Hours	514,977 Hours	483,808 Hours
Acoustic Noise at 25°C		29.1 dBA	41.6 dBA	47.8 dBA	
Fan		•	•	•	
Width x Depth x Height		440 x 204 x 43 mm (17.32 x 8.03 x 1.7 in)	440 x 310 x 43 mm (17.32 x 12.2 x 1.7 in)	440 x 347 x 43 mm (17.32 x 13.7 x 1.7 in)	
Weight		2.98 kg (6.57 lb)	5.04 kg (11.11 lb)	6.25 kg (13.78 lb)	
Electromagnetic Compliance		Class (A or B)	A	A	A
		Warranty Hardware*	Lifetime	Lifetime	Lifetime
Warranty Power Supply		Lifetime	Lifetime	Lifetime	
Modules		AGM731F/AGM732F; AXM761/AXM762/AXM763/ AXM764 /AXM765/ AXC761/3/5/7/10/15/20	AGM731F/AGM732F; AXM761/AXM762/AXM763/ AXM764 /AXM765/ AXC761/3/5/7/10/15/20	AGM731F/AGM732F; AXM761/AXM762/AXM763/ AXM764 /AXM765/ AXC761/3/5/7/10/15/20	AAGM731F/AGM732F; AXM761/AXM762/AXM763/ AXM764 /AXM765/ AXC761/3/5/7/10/15/20
		ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312 PMB0332 PMB0352	PMB0311 PMB0331 PMB0351

Smart Managed Pro Switches

Smart Managed Pro, L2+ with static routing, 10-Gigabit



MODEL	XS716T	XS728T	XS748T		
Port Configuration	10/100 RJ45 Ports (Auto Uplink)				
	10/100/1000 RJ45 Ports (Auto Uplink)	16 10GBase-T	24 10GBase-T		
	Fiber Ports	2 Combo SFP+ (10G)	4 SFP+ (10G)		
PoE	Power Over Ethernet 802.3af Ports				
	PoE Plus (30W) 802.3at Ports				
Scalability	Total PoE Budget				
	# MAC Addresses	16,000	32,000		
	ARP Table – Size of	738	1,024		
	# Routing Entries	32	64		
System Management	# ACL Rules	100	100		
	Single IP Management	•	•		
	Web Managed/GUI	•	•		
	Command Line Interface/RS232 Console/Telnet				
Quality of Service	SNMP Version	v1, v2c, v3	v1, v2c, v3		
	RMON Group	1,2,3,9	1,2,3,9		
	DHCP (Client/Server/Relay)	Client/L2 Relay	Client/L2 Relay		
	Port Mirroring	Many-to-One	Many-to-One		
	IPv6 full set	•	•		
	Multicast Filtering	Number of Priority Queues	8	8	
		Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP	
	Performance	Auto Voice VLAN	•	•	
		IGMP Snooping Version	v1, v2, v3	v1, v2, v3	
	Availability	IGMP Snooping Querier	•	•	
Bandwidth		320Gbps	560Gbps		
Traffic Management	Buffer Memory	2MB Per System	3MB Per System		
	Jumbo Frames	9K	10K		
L3 Routing	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s		
	RPS Redundant Power Supply				
	Security	Number of 802.1q VLAN/Number of VLAN Group	256	512	
		Link Agregation 802.3ad/LACP	•	•	
		Discovery Protocol LLDP 802.1ab	•	•	
		Rate Limiting	•	•	
		Broadcast Storm Control	•	•	
		Energy Efficiency	IPv4 Static Routing	•	•
			IEEE 802.1x (RADIUS)	•	•
		Physical	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP
SSL/SSH & HTTPS			HTTPS	HTTPS	
Physical		Guest VLAN	•	•	
	DHCP Snooping/IP Source Guard/ARP Guard	•	•		
	TACACS+	•	•		
	Auto Port Power Down	•	•		
	Dynamic Power Consumption	•	•		
	Max Power Consumption	96.0W	134.9W		
	Desktop/Rackmount/Click	R	R		
	Metal/Plastic Enclosure	M	M		
	MTBF	276,832 Hours	514,977 Hours		
	Acoustic Noise at 25°C	29.1 dBA	41.6 dBA		
Fan	•	•			
Electromagnetic Compliance	Width x Depth x Height	440 x 204 x 43 mm (17.32 x 8.03 x 1.7 in)	440 x 310 x 43 mm (17.32 x 12.2 x 1.7 in)		
	Weight	2.98 kg (6.57 lb)	5.04 kg (11.11 lb)		
Warranty Hardware*	Class (A or B)	A	A		
Warranty Power Supply	Lifetime	Lifetime	Lifetime		
Modules	Lifetime	Lifetime	Lifetime		
	AGM731F/AGM732F; AXM761/AXM762/AXM763/ AXM764 /AXM765/ AXC761/3/5/7/10/15/20	AGM731F/AGM732F; AXM761/ AXM762/AXM763/AXM764 /AXM765/ AXC761/3/5/7/10/15/20	AGM731F/AGM732F; AXM761/ AXM762/AXM763/AXM764 /AXM765/ AXC761/3/5/7/10/15/20		
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312 PMB0332 PMB0352	PMB0313 PMB0333 PMB0353		

WHY SMART BUSINESSES CHOOSE SMART CLOUD SWITCHES



NETGEAR is revolutionizing the switching business with its new Insight Managed Smart Cloud network devices with full remote management and monitoring capabilities. Networking and IT made easy is now reality!

With NETGEAR Insight app and Insight Cloud Portal, you can now quickly discover, setup, monitor and manage your Insight Managed Switches and Wireless Access Points as well as your Business-class ReadyNAS storage devices,

from anywhere! Whether at home, out of the office or on a business trip, you can still manage your network as if you were right there, all from any device and from anywhere in the world. You are in control of your network and can enjoy the peace of mind you never experienced before when dealing with IT.

Your Network. Anytime. Anywhere.

Discover the 10 reasons why our customers love NETGEAR Insight Managed Smart Cloud Switches

1	Remote app monitoring and management	Setup, monitor and manage your Smart Cloud switches from anywhere with NETGEAR Insight iOS and Android app, as well as from the Insight Cloud Portal together with your Insight Managed Wireless Access Points, and ReadyNAS storage devices.
2	Affordable Cloud managed Switches	Fully-integrated cloud-manageable devices; no additional hardware, server, appliance, or cloud key needed.
3	Saves you time	Save yourself time doing the administration of your networking devices. In two simple screens, Networks and Devices, you can monitor and configure your Insight network appliances anywhere anytime. It includes updating firmware, rebooting, adding and removing devices.
4	Switches you want to show	With their new, modern and sleek design, these white Smart Cloud switches are devices you will want to display.
5	Rich feature-set	Advanced VLAN and QoS, Advanced Security, L3 lite routing capabilities, ACL or SNMP are some of the many features that are available in Smart Cloud switches.
6	Deploy anywhere	Desktop or rackmount form factors and silent or whisper-quiet operation makes them the perfect switches to deploy in any environment, even noise-sensitive.
7	Designed as a Core Switch	Powerful L2+/Layer 3 Lite features make them the most cost-effective core switches for SMB and virtualization environment
8	Power it all	Choose from a choice of PoE/PoE+ power to enable seamless PoE connection of standard PoE devices (IP Phones, Wireless Access Points, IP Cameras even high-power Pan-Tilt-Zoom models, IoT devices, etc).
9	Smart redundancy	Smart switches mean smart redundancy with Link protection, Spanning Tree, LACP, switch protection, no-downtime stacking.
10	Industry-leading 5-year limited hardware warranty	Quality, durability, and peace of mind from NETGEAR

Smart Cloud Switches

Insight Managed Smart Cloud, L2, Gigabit



MODEL	GC110	GC110P	GC510P	
Unified Network Management	Discovery, setup, monitoring and management			
(Discovery, Setup, Monitoring & Management)	Remote/Cloud management	NETGEAR Insight mobile app on phone or tablet, or Insight Cloud Portal from PC, Mac, or tablet web browser		
	Anywhere, anytime, from the palm of your hand using Insight mobile app or from any PC, Mac, or tablet web browser using the Insight Cloud Portal			
	Centralized network configuration (policies)	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage for VLANs, ACLs, QoS, and LAGs		
	Device auto-join and configure (zero-touch provisioning) Multi-site, multi-network single pane-of-glass view	Additional Insight Managed devices added to the network automatically inherit the network configuration Manage multiple sites, locations, and networks in a single view using the Insight app		
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	8	8	
	1G SFP Fiber Ports	2 dedicated	2 dedicated	
PoE (Power over Ethernet)	Power Over Ethernet 802.3af Ports	8		
	PoE Plus (30W) 802.3at Ports	8		
	Total PoE Budget	62 Watts	134 Watts	
	Advanced per-port PoE controls (enable/disable/power limit)	Yes	Yes	
LEDs	Advanced per-port PoE scheduling	Yes	Yes	
	Front (per device) - Desktop models	Cloud/Internet Connection, Power	Cloud/Internet Connection, Power	Cloud/Internet Connection, Power
	Rear (port side) (per device) - Desktop models Front (port side) (per device) - Rackmount models	Cloud/Internet Connection, Power	Cloud/Internet Connection, Power, PoE Max	Cloud/Internet Connection, Power, PoE Max
	Rear (port side) (per port) - Desktop models Front (port side) (per port) - Rackmount models	Speed/Link/Activity	Speed/Link/Activity (left), PoE Power (right)	Speed/Link/Activity (left), PoE Power (right)
Scalability	# MAC Addresses	16000	16000	
	# ACL Rules (Shared for MAC, IP and IPv6 ACLs)	100	100	
System Management	Cloud/Remote Management	Yes	Yes	
	Mobile app and Cloud Portal management	Yes	Yes	
	uPnP Discovery & Bonjour Discovery	Yes	Yes	
	Centralized network configuration (policies)	Yes	Yes	
	Device auto-join and configure (zero-touch provisioning)	Yes	Yes	
	Multi-site, multi-network single pane-of-glass view	Yes	Yes	
	Multi-switch, multi-port concurrent configuration	Yes	Yes	
	Network/global password (for all Insight Managed devices on a network)	Yes	Yes	
	Local-only Web Browser-Based Managed/GUI	Yes	Yes	
	DHCP (Client/Server/Relay)	Client	Client	
Quality of Service	Port Mirroring	Many-to-One	Many-to-One	
	IPv6 Management	Yes	Yes	
	Firmware upgrade direct from Cloud (via mobile device)	Yes	Yes	
	Number of Priority Queues	8	8	
Multicast Filtering	Traffic Prioritization	802.1p, DSCP, Diffserv	802.1p, DSCP, Diffserv	
	Auto Voice VLAN	Yes	Yes	
	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	
Performance	IGMP Snooping Querier	Yes	Yes	
	Bandwidth	20 Gbps	20 Gbps	
	Buffer Memory	1.5 MB Per System	1.5 MB Per System	
Availability	Jumbo Frames	Yes	Yes	
	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	256	256	
	Link Aggregation 802.3ad/LACP	Yes	Yes	
	Discovery Protocol LLDP 802.1ab	Yes	Yes	
	Rate Limiting	Yes	Yes	
	Broadcast Storm Control	Yes	Yes	
Security	IPV4/IPV6 Static Routing	Yes	Yes	
	IEEE 802.1x (RADIUS)	Yes	Yes	
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	
	SSL/SSH & HTTPS	SSL/HTTPS	SSL/HTTPS	
	Guest VLAN	Yes	Yes	
	DHCP Snooping/IP Source Guard	Yes	Yes	
	TACACS+	Yes	Yes	
	IEEE 802.3az	Yes	Yes	
	Auto Port Power Down	Yes	Yes	
	Dynamic Power Consumption	Yes	Yes	
Energy Efficiency	Max Power Consumption	10.1 Watts	74.4 Watts (full PoE)	
	Desktop/Wallmount (VESA)/Rackmount	D/W	D/W/R	
	Metal/Plastic Enclosure	M	M	
	MTBF	4,013,311 hrs (458 yrs)	2,976,994 hrs (340 yrs)	
Physical	Acoustic Noise	0dB	0dB	
	Fan			
	Width x Depth x Height	245 x 123 x 33 mm (9.6 x 4.8 x 1.3 in)	245 x 123 x 33 mm (9.6 x 4.8 x 1.3 in)	314 x 188 x 44 mm (12.4 x 7.4 x 1.7 in)
	Weight	0.74 kg (1.63 lb)	0.77 kg (1.70 lb)	2.00 kg (4.41 lb)
Electromagnetic Compliance	Class (A or B)	A	A	
Warranty Switch*		5-years	5-years	
Warranty External Power Adapter		2-years	2-years	
Modules		AGM731F, AGM732F, AGM734	AGM731F, AGM732F, AGM734	
ProSUPPORT Maintenance Pkgs***	OnCall 24x7 1-year	PMB0S12	PMB0S12	
	OnCall 24x7 3-year	PMB0S32	PMB0S32	
	OnCall 24x7 5-year	PMB0S52	PMB0S52	

Smart Cloud Switches

	Insight Managed Smart Cloud, L2, Gigabit	Insight Managed Smart Cloud, L2+/L3 Lite, Gigabit/10G SFP+		
		GC510PP	GC728X	GC728XP
MODEL				
Unified Network Management (Discovery, Setup, Monitoring & Management)	Discovery, setup, monitoring and management Remote/Cloud management	NETGEAR Insight mobile app on phone or tablet, or Insight Cloud Portal from PC, Mac, or tablet web browser Anywhere, anytime, from the palm of your hand using Insight mobile app or from any PC, Mac, or tablet web browser using the Insight Cloud Portal		
	Centralized network configuration (policies)	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage for VLANs, ACLs, QoS, and LAGs		
	Device auto-join and configure (zero-touch provisioning)	Additional Insight Managed devices added to the network automatically inherit the network configuration		
	Multi-site, multi-network single pane-of-glass view	Manage multiple sites, locations, and networks in a single view using the Insight app		
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	8	24	24
	1G SFP Fiber Ports	2 dedicated	2 dedicated	2 dedicated
	10G SFP+ Fiber Ports		2 dedicated	2 dedicated
	PoE Plus (30W) 802.3at Ports	8		24
	Total PoE Budget	195 Watts		390 Watts
	Advanced per-port PoE controls (enable/disable/power limit)	Yes		Yes
	Advanced per-port PoE scheduling	Yes		Yes
LEDs	Front (per device) - Desktop models	Cloud/Internet Connection, Power		
	Rear (port side) (per device) - Desktop models	Cloud/Internet Connection, Power, PoE Max, Fan Status		
	Front (port side) (per device) - Rackmount models	Cloud/Internet Connection, Power, PoE Max, Fan Status		
	Rear (port side) (per port) - Desktop models	Speed/Link/Activity (left), PoE Power (right)	Speed/Link/Activity	Speed/Link/Activity (left), PoE Power (right)
	Front (port side) (per port) - Rackmount models	Speed/Link/Activity (left), PoE Power (right)	Speed/Link/Activity	Speed/Link/Activity (left), PoE Power (right)
Scalability	# MAC Addresses	16000	16000	16000
	ARP Table - Size of		384	384
	# Routing Entries		32 IPv4 / 31 IPv6	32 IPv4 / 31 IPv6
	# ACL Rules (Shared for MAC, IP and IPv6 ACLs)	100	100	100
System Management	Cloud/Remote Management	Yes	Yes	Yes
	Mobile app and Cloud Portal management	Yes	Yes	Yes
	uPnP Discovery & Bonjour Discovery	Yes	Yes	Yes
	Centralized network configuration (policies)	Yes	Yes	Yes
	Device auto-join and configure (zero-touch provisioning)	Yes	Yes	Yes
	Multi-site, multi-network single pane-of-glass view	Yes	Yes	Yes
	Multi-switch, multi-port concurrent configuration	Yes	Yes	Yes
	Network/global password (for all Insight Managed devices on a network)	Yes	Yes	Yes
	Local-only Web Browser-Based Managed/GUI	Yes	Yes	Yes
	SNMP Version		v1, v2c, v3	v1, v2c, v3
	RMON Group		1,2,3,9	1,2,3,9
	DHCP (Client/Server/Relay)	Client	Client	Client
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One
	IPv6 Management	Yes	Yes	Yes
	Firmware upgrade direct from Cloud (via mobile device)	Yes	Yes	Yes
Quality of Service	Number of Priority Queues	8	8	8
	Traffic Prioritization	802.1p, DSCP, Diffserv	802.1p, DSCP, Diffserv	802.1p, DSCP, Diffserv
	Auto Voice VLAN	Yes	Yes	Yes
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	Yes	Yes	Yes
Performance	Bandwidth	20 Gbps	92 Gbps	92 Gbps
	Buffer Memory	1.5 MB Per System	1.5 MB Per System	1.5 MB Per System
	Jumbo Frames	Yes	Yes	Yes
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	256	256	256
	Link Aggregation 802.3ad/LACP	Yes	Yes	Yes
	Discovery Protocol LLDP 802.1ab	Yes	Yes	Yes
	Rate Limiting	Yes	Yes	Yes
	Broadcast Storm Control	Yes	Yes	Yes
L3 Routing	IPv4/IPv6 Static Routing	Yes	Yes	Yes
Security	IEEE 802.1x (RADIUS)	Yes	Yes	Yes
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP
	SSL/SSH & HTTPS	SSL/HTTPS	SSL/HTTPS	SSL/HTTPS
	Guest VLAN	Yes	Yes	Yes
	DHCP Snooping/IP Source Guard	Yes	Yes	Yes
	TACACS+	Yes	Yes	Yes
Energy Efficiency	IEEE 802.3az	Yes	Yes	Yes
	Auto Port Power Down	Yes	Yes	Yes
	Dynamic Power Consumption	Yes	Yes	Yes
	Max Power Consumption	200.0 Watts (full PoE)	18.5 Watts	437.1 Watts (full PoE)
Physical	Desktop/Wallmount (VESA)/Rackmount	D/W/R	D/R	D/R
	Metal/Plastic Enclosure	M	M	M
	MTBF	381,503 hrs (44 yrs)	1,874,356 hrs (214 yrs)	629,962 hrs (72 yrs)
	Acoustic Noise	28 dBA	28 dBA	39 dBA
	Fan	1 (whisper-quiet)	1 (whisper-quiet)	2 (dynamic)
	Width x Depth x Height	314 x 188 x 44 mm (12.4 x 7.4 x 1.7 in)	440 x 224 x 44 mm (17.3 x 8.8 x 1.7 in)	440 x 224 x 44 mm (17.3 x 8.8 x 1.7 in)
	Weight	2.23 kg (4.92 lb)	2.81 kg (6.19 lb)	3.79 kg (8.36 lb)
Electromagnetic Compliance	Class (A or B)	A	A	A
Warranty Switch*		5-years	5-years	5-years
Modules		AGM731F, AGM732F, AGM734	AGM731F, AGM732F, AGM734, AXM761, AXM762, AXM763, AXM764, AXM765, AXM766, AXM767	AGM731F, AGM732F, AGM734, AXM761, AXM762, AXM763, AXM764, AXM765, AXM766, AXM767
ProSUPPORT Maintenance Pkgs***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0512 PMB0532 PMB0552	PMB0311 PMB0331 PMB0351	PMB0311 PMB0331 PMB0351

Fully Managed Switches

	Fully Managed, M4100 series (L2+ with static routing), 10/100 Fast Ethernet	Fully Managed, M4100 series (L2+ with static routing), Gigabit
	M4100-50-POE (FSM7250P)	M4100-D12G (GSM5212)
MODEL		
Port Configuration	10/100 RJ45 Ports (Auto Uplink) 10/100/1000 RJ45 Ports (Auto Uplink) Fiber Ports	48 2 4 SFP
PoE	Power Over Ethernet 802.3af Ports PoE Plus (30W) 802.3at Ports Total PoE Budget	48 1 (PD: powered by PoE+) 380W standard / up to 740W with EPS
Scalability	# MAC Addresses ARP Table - Size of # Routing Entries # ACL Rules	16,000 512 64 512
System Management	Single IP Management Web Managed/GUI Command Line Interface/RS232 Console/Telnet SNMP Version RMON Group DHCP (Client/Server/Relay) Port Mirroring IPv6 full set	<ul style="list-style-type: none">v1, v2c, v31, 2, 3, 9Client/Server/L3 RelayMany-to-One
Quality of Service	Number of Priority Queues Traffic Prioritization Auto Voice VLAN	8 802.1p ; Diffserv ; TCP/UDP •
Multicast Filtering	IGMP Snooping Version IGMP Snooping Querier	v1, v2, v3 •
Performance	Bandwidth Buffer Memory Jumbo Frames	9Gbps 12Mb 9K
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s RPS Redundant Power Supply	802.1d, .1w, .1s RPS / EPS
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group Link Aggregation 802.3ad/LACP Discovery Protocol LLDP 802.1ab Rate Limiting Broadcast Storm Control	1,024 / 1,024 • • • •
L3 Routing	IPv4 Static Routing	•
Security	IEEE 802.1x (RADIUS) ACL - Access Control Lists SSL/SSH & HTTPS Guest VLAN DHCP Snooping TACACS+ Auto Port Power Down Dynamic Power Consumption Max Power Consumption	<ul style="list-style-type: none">MAC, IP, TCPSSL/SSH & HTTPS•••••18.80W
Physical	Desktop/Rackmount/Click Metal/Plastic Enclosure MTBF Acoustic Noise at 25°C Fan Width x Depth x Height Weight	R M 214,142 Hours 38.9 dbA • 440 x 310 x 43.2 mm (17.32 x 12.20 x 1.7 in) 4.96 kg (10.9 lb)
Electromagnetic Compliance	Class (A or B)	A
Warranty Hardware		Lifetime
Warranty Power Supply		Lifetime
Modules		AFM735/ AGM731F/AGM732F, RPS4000 (RPS/EPS x4 switches)
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312 PMB0332 PMB0352

Fully Managed Switches

Fully Managed, M4100 series (L2+ with static routing), Gigabit



MODEL	M4100-12GF (GSM7212F)	M4100-26G (GSM7224)	M4100-50G (GSM7248)	M4100-26G-POE (GSM7226LP)	
Port Configuration	10/100 RJ45 Ports (Auto Uplink)				
	10/100/1000 RJ45 Ports (Auto Uplink)	12	26	50	
	Fiber Ports	12 SFP	4 SFP	4 SFP	
PoE	Power Over Ethernet 802.3af Ports	4		24	
	PoE Plus (30W) 802.3at Ports	4			
	Total PoE Budget	150W standard		192W standard / up to 380W with EPS	
Scalability	# MAC Addresses	16,000	16,000	16,000	
	ARP Table – Size of	512	512	512	
	# Routing Entries	64	64	64	
	# ACL Rules	512	512	512	
System Management	Web Managed/GUI	•	•	•	
	Command Line Interface/RS232 Console/Telnet	•	•	•	
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
	RMON Group	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay	Client/Server/L3 Relay	Client/Server/L3 Relay
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One	Many-to-One
	IPv6 full set	•	•	•	•
Quality of Service	Number of Priority Queues	8	8	8	
	Traffic Prioritization	802.1p ; Diffserv ; TCP/UDP	802.1p ; Diffserv ; TCP/UDP	802.1p ; Diffserv ; TCP/UDP	802.1p ; Diffserv ; TCP/UDP
Multicast Filtering	Auto Voice VLAN	•	•	•	
	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3	
	IGMP Snooping Querier	•	•	•	
Performance	Bandwidth	24Gbps	52Gbps	100Gbps	
	Buffer Memory	12Mb	12Mb	12Mb	
	Jumbo Frames	9K	9K	9K	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	
	RPS Redundant Power Supply	RPS	RPS	RPS	RPS / EPS
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	1,024/1,024	1,024/1,024	1,024/1,024	
	Link Aggregation 802.3ad/LACP	•	•	•	
	Discovery Protocol LLDP 802.1ab	•	•	•	
	Rate Limiting	•	•	•	
	Broadcast Storm Control	•	•	•	
L3 Routing	IPv4 Static Routing	•	•	•	
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	•	•	•	
Security	IEEE 802.1x (RADIUS)	•	•	•	
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP	
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	
	Guest VLAN	•	•	•	
	DHCP Snooping/IP Source Guard/ARP Guard	•	•	•	
	TACACS+	•	•	•	
	Energy Efficiency	IEEE 802.3az	•	•	•
Physical	Auto Port Power Down	•	•	•	
	Dynamic Power Consumption	•	•	•	
	Power Consumption	160,6 Watts	31.6 Watts	49.5 Watts	
	Desktop/Rackmount/Click	R	R	R	
	Metal/Plastic Enclosure	M	M	M	
	MTBF	670,956 hours	702,785 hours	489,311 hours	
	Acoustic Noise at 25°C	30dB	35.6dB	37.2dB	
	Fan	•	•	•	
	Width x Depth x Height	440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in)	440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in)	440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in)	440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in)
	Weight	3.665 kg (8.08 lb)	3.24 kg (7.1 lb)	3.63 kg (8.0 lb)	3.79 kg (8.36 lb)
Electromagnetic Compliance	Class (A or B)	A	A	A	
Warranty Hardware	Lifetime	Lifetime	Lifetime	Lifetime	
Warranty Power Supply	Lifetime	Lifetime	Lifetime	Lifetime	
Modules	AFM735/ AGM731F/ AGM732F, RPS4000 (RPS x4 switches)	AFM735/ AGM731F/ AGM732F, RPS4000 (RPS x4 switches)	AFM735/ AGM731F/ AGM732F, RPS4000 (RPS x4 switches)	AFM735/ AGM731F/ AGM732F, RPS4000 (RPS x4 switches)	
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0312	PMB0312	PMB0312	
	OnCall 24x7 3-year	PMB0332	PMB0332	PMB0332	
	OnCall 24x7 5-year	PMB0352	PMB0352	PMB0352	

Fully Managed Switches

Fully Managed, M4100 series (L2+ with static routing), Gigabit

Fully Managed, M4200 series (L3 with RIP), Multi-Gigabit



MODEL	M4100-24G-POE+ (GSM7224P)	M4100-50G-POE+ (GSM7248P)	M4200-10MG-POE+ (GSM4210P)	
Port Configuration	10/100 RJ45 Ports (Auto Uplink)			
	10/100/1000 RJ45 Ports (Auto Uplink)	24	50	
	Fiber Ports	4 SFP	4 SFP	
PoE	Power Over Ethernet 802.3af Ports	24	48	
	PoE Plus (30W) 802.3at Ports	24	48	
	Total PoE Budget	380W standard / up to 720W with EPS	380W standard / up to 1,440W with EPS	240W
Scalability	# MAC Addresses	16,000	16,000	
	ARP Table – Size of	512	512	
	# Routing Entries	64	64	
	# ACL Rules	512	512	
System Management	Web Managed/GUI	•	•	
	Command Line Interface/RS232 Console/Telnet	•	•	
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
	RMON Group	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay	Client/Server/L3 Relay
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One
	IPv6 full set	•	•	•
Quality of Service	Number of Priority Queues	8	8	
	Traffic Prioritization	802.1p ; Diffserv ; TCP/UDP	802.1p ; Diffserv ; TCP/UDP	802.1p ; Diffserv ; TCP/UDP
Multicast Filtering	Auto Voice VLAN	•	•	
	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	
	IGMP Snooping Querier	•	•	
Performance	Bandwidth	48Gbps	100Gbps	
	Buffer Memory	12Mb	12Mb	
	Jumbo Frames	9K	9K	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s; PV(R)STP	
	RPS Redundant Power Supply	RPS / EPS	RPS / EPS	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	1,024/1,024	1,024/1,024	
	Link Aggregation 802.3ad/LACP	•	•	
	Discovery Protocol LLDP 802.1ab	•	•	
	Rate Limiting	•	•	
	Broadcast Storm Control	•	•	
L3 Routing	IPv4 Static Routing	•	•	
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	•	RIP v1, v2	
Security	IEEE 802.1x (RADIUS)	•	•	
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	
	Guest VLAN	•	•	
	DHCP Snooping/IP Source Guard/ARP Guard	•	•	
	TACACS+	•	•	
	Energy Efficiency	IEEE 802.3az	•	•
Physical	Auto Port Power Down	•	•	
	Dynamic Power Consumption	•	•	
	Power Consumption	533 Watts	555.5 Watts	
	Desktop/Rackmount/Click	R	R	
	Metal/Plastic Enclosure	M	M	
	MTBF	394,619 hours	239,298 hours	
	Acoustic Noise at 25°C	33.8 dBA	47.7 dBA	
	Fan	•	•	
	Width x Depth x Height	440 x 257 x 43.2 mm (17.3 x 10.12 x 1.7 in)	440 x 310 x 43.2 mm (17.32 x 12.20 x 1.7 in)	440 x 100 x 44 mm (17.32 x 3.94 x 1.73 in)
	Weight	4.368 kg (9.63 lb)	4.96 kg (10.9 lb)	2.05 kg (4.52 lb)
Electromagnetic Compliance	Class (A or B)	A	A	
Warranty Hardware	Lifetime	Lifetime	Lifetime	
Warranty Power Supply	Lifetime	Lifetime	Lifetime	
Modules	AFM735/ AGM731F/AGM732F, RPS4000 (RPS/EPs x4 switches)	AFM735/ AGM731F/AGM732F, RPS4000 (RPS/EPs x4 switches)	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0312	PMB0312	
	OnCall 24x7 3-year	PMB0332	PMB0332	
	OnCall 24x7 5-year	PMB0352	PMB0352	

WHAT SETS NETGEAR M4300 APART?

Scaling from 24-port 1G full power PoE+ to 96-port 10G and also 24-port 40G, the M4300 managed switch series is the world's first stackable platform offering edge to core stacking with unrivalled ease of use: 10 Gigabit models can seamlessly stack with 1 Gigabit models. Non-stop forwarding virtual chassis architecture provides advanced High Availability. Dual redundant, modular power supplies equipping full width models contribute to business continuity management for resilient networking. M4300 is also the world's first stackable platform reproducing Spine and Leaf datacenter topologies in the same stack with unrivalled ease of use. No more bottlenecks or downtime!

1G models are capable of PoE+ full provisioning, feature a Layer 3 feature set including static, policy-based and dynamic routing with RIP, VRRP, OSPF and PIM as standard, and are future-proof, SDN-ready. The M4300 is covered under NETGEAR ProSAFE industry-leading Lifetime Hardware Warranty with 90 days of Technical Support via phone and email, Lifetime Technical Support through online chat and Lifetime Next Business Day hardware replacement for utmost peace of mind.

Discover the 10 reasons why our customers love M4300

1	Flexible Server Connections	M4300 gets you covered with plentiful Copper AND Fiber available. No additional module needed.
2	Affordable Enterprise-grade Switches	You will feel good about the price you have to pay for M4300s, with no hidden costs.
3	World-class Features and Future-ready Network	No license upgrades needed for 802.1x and MAB NAC implementation, Layer 3 (PBR, RIP, VRRP, OSPF and PIM) and SDN-Ready.
4	Scales with your Business	Half-Width M4300 models will let you pair a second switch in same U and allows you to easily add capacity to scale with your business.
5	Edge to Core Stacking	M4300 is the world's first stackable platform reproducing Spine and Leaf datacenter topologies in the SAME STACK with unrivalled ease of use. No more bottlenecks or downtime!
6	Full Speed Ahead	M4300 will scale up to astronomic performance needs with up to 128K MAC table, 2K ARP/NDP and 1920 Gbps of switching and routing capacity.
7	Absolutely NO downtime	M4300 Nonstop Forwarding (NSF) absolutely provides increased network service availability, eliminating downtimes, for a fully resilient network.
8	Convergent Access Layer	M4300 ring stacking reduces the number of logical units to manage with one easy Web interface while bringing full network redundancy in aggregation to the core, and simplifies PoE deployment at the edge.
9	HA Best Practices	M4300 two-unit horizontal stacking is cost effective yet highly effective for HA with link aggregation (L2/L3/L4 LACP), load balancing and nonstop forwarding failover, for no single point of failure across your virtualized servers.
10	Full power redundancy	M4300 positively simplified Redundant Power Supply, just insert one more, hot swap (and cost effective) PSU in full width models for mission-critical operations.

Fully Managed Switches

Fully Managed, M4300 series (L3), Gigabit and 10-Gigabit



MODEL	M4300-28G (GSM4328S)	M4300-52G (GSM4352S)	M4300-28G-POE+ (GSM4328PA OR GSM4328PB)	M4300-52G-POE+ (GSM4352PA OR GSM4352PB)	
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	24 / 2 10GBase-T	48 / 2 10GBase-T	24 / 2 10GBase-T	
	Fiber Ports	2 SFP+ (10G)	2 SFP+ (10G)	2 SFP+ (10G)	
	10Gig Module Bays				
PoE	Power Over Ethernet 802.3af Ports		24	48	
	PoE Plus (30W) 802.3at Ports		24	48	
	Total PoE Budget		480W (PA)/630W (PB) Up to 720W with second PSU	480W (PA) or 591W (PB) Up to 1,440W with second PSU	
Stacking	Number of Dedicated Stacking Ports	Up to 4 10G ports	Up to 4 10G ports	Up to 4 10G ports	
	Stacking Bandwidth	80Gbps	80Gbps	80Gbps	
	Stacking (maximum capacity)	8 switches	8 switches	8 switches	
Scalability	Stacking Compatibility	M4300 series	M4300 series	M4300 series	
	# MAC Addresses	16,000	16,000	16,000	
	ARP Table - Size of	2,048	2,048	2,048	
	# Routing Entries	12,000	12,000	12,000	
	# ACL Rules	16,384 (ingress, egress)	16,384 (ingress, egress)	16,384 (ingress, egress)	
System Management	Single IP Management	•	•	•	
	Web Managed/GUI	•	•	•	
	Command Line Interface/RS232 Console/Telnet	•	•	•	
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	
	RMON Group	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9	
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay	Client/Server/L3 Relay	
	Port Mirroring	Many-to-One; RSPAN	Many-to-One; RSPAN	Many-to-One; RSPAN	
	IPv6 full set	•	•	•	
	Quality of Service	Number of Priority Queues	8	8	8
		Traffic Prioritization	802.1p ; Diffserv ; TCP/UDP	802.1p ; Diffserv ; TCP/UDP	802.1p ; Diffserv ; TCP/UDP
Auto Voice VLAN		•	•	•	
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3	
	IGMP Snooping Querier	•	•	•	
Performance	Bandwidth	128Gbps	176Gbps	128Gbps	
	Buffer Memory	16Mb	16Mb	16Mb	
	Jumbo Frames	9K	9K	9K	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	
	RPS Redundant Power Supply	Second optional APS150W	Second optional APS150W	Second optional APS550W (PA) Second optional APS1000W (PB)	
	Modular Power Supply	APS150W	APS150W	APS550W (PA) or APS1000W (PB)	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	4,093/4,093	4,093/4,093	4,093/4,093	
	Link Aggregation 802.3ad/LACP	•	•	•	
	Discovery Protocol LLDP 802.1ab	•	•	•	
	Rate Limiting	•	•	•	
	Broadcast Storm Control	•	•	•	
L3 Routing	IPv4 Static Routing	•	•	•	
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	•	•	•	
	IPv6 Static Routing, IPv6 OSPFv3	•	•	•	
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	•	•	•	
Security	IEEE 802.1x (RADIUS)	•	•	•	
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP	
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	
	Guest VLAN	•	•	•	
	DHCP Snooping/IP Source Guard/ARP Guard	•	•	•	
	TACACS+	•	•	•	
Energy Efficiency	IEEE 802.3az	•	•	•	
	Auto Port Power Down	•	•	•	
	Dynamic Power Consumption	•	•	•	
	Power Consumption	34.5 Watts	47.4 Watts	577W (PA 1 PSU) 833.2W (PB 1 PSU)	
Physical	Desktop/Rackmount/Click	R	R	R	
	Metal/Plastic Enclosure	M	M	M	
	MTBF	1,328,968 hours	578,472 hours	1,189,685 hours	
	Acoustic Noise at 25°C	30.3dBA	31.5dBA	39.8dBA	
	Fan	Front to back	Front to back	Front to back	
	Width x Depth x Height	440 x 310 x 44 mm (17.32 x 12.2 x 1.73 in)	440 x 310 x 44 mm (17.32 x 12.2 x 1.73 in)	440 x 310 x 44 mm (17.32 x 12.2 x 1.73 in)	
	Weight	4.51kg (9.94lb)	4.91kg (10.81lb)	5.09kg (11.21lb)	
Electromagnetic Compliance	Class (A or B)	A	A		
Warranty Hardware	Lifetime	Lifetime	Lifetime		
Warranty Power Supply	Lifetime	Lifetime	Lifetime		
Modules		AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/ AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/ AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/ AXM764/AXM765	
		PMB0313 PMB0333 PMB0353	PMB0313 PMB0333 PMB0353	PMB0313 PMB0333 PMB0353	
	ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0313 PMB0333 PMB0353	PMB0313 PMB0333 PMB0353	

Fully Managed Switches

Fully Managed, M4300 series (L3), Gigabit and 10-Gigabit



MODEL	M4300-8X8F (XSM4316S)	M4300-12X12F (XSM4324S)	M4300-24X (XSM4324CS)	M4300-24X24F (XSM4348S)
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink) Fiber Ports 10Gig Module Bays	8 10GBase-T 8 SFP+ (10G)	12 10GBase-T 12 SFP+ (10G)	24 10GBase-T 4 combo SFP+ (10G) 24 SFP+ (10G)
PoE	Power Over Ethernet 802.3af Ports PoE Plus (30W) 802.3at Ports Total PoE Budget			
Stacking	Number of Dedicated Stacking Ports Stacking Bandwidth Stacking (maximum capacity) Stacking Compatibility	Up to 16 10G ports 320Gbps 8 switches M4300 series	Up to 16 10G ports 320Gbps 8 switches M4300 series	Up to 16 10G ports 320Gbps 8 switches M4300 series
Scalability	# MAC Addresses ARP Table - Size of # Routing Entries # ACL Rules	16,000 2,048 12,000 16,384 (ingress, egress)	16,000 2,048 12,000 16,384 (ingress, egress)	128,000 8,192 12,000 16,384 (ingress, egress)
System Management	Single IP Management Web Managed/GUI Command Line Interface/RS232 Console/Telnet SNMP Version RMON Group DHCP (Client/Server/Relay) Port Mirroring IPv6 full set	• • • v1, v2c, v3 1, 2, 3, 9 Client/Server/L3 Relay Many-to-One; RSPAN •	• • • v1, v2c, v3 1, 2, 3, 9 Client/Server/L3 Relay Many-to-One; RSPAN •	• • • v1, v2c, v3 1, 2, 3, 9 Client/Server/L3 Relay Many-to-One; RSPAN •
Quality of Service	Number of Priority Queues Traffic Prioritization Auto Voice VLAN	8 802.1p; Diffserv; TCP/UDP •	8 802.1p; Diffserv; TCP/UDP •	8 802.1p; Diffserv; TCP/UDP •
Multicast Filtering	IGMP Snooping Version IGMP Snooping Querier	v1, v2, v3 •	v1, v2, v3 •	v1, v2, v3 •
Performance	Bandwidth Buffer Memory Jumbo Frames	320Gbps 16Mb 9K	480Gbps 32Mb 9K	960Gbps 56Mb 9K
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s RPS Redundant Power Supply Modular Power Supply	802.1d, .1w, .1s; PV(R)STP AP5250W	802.1d, .1w, .1s; PV(R)STP AP5250W	802.1d, .1w, .1s; PV(R)STP Second optional AP5250W AP5250W
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group Link Aggregation 802.3ad/LACP Discovery Protocol LLDP 802.1ab Rate Limiting Broadcast Storm Control	4,093/4,093 • • • •	4,093/4,093 • • • •	4,093/4,093 • • • •
L3 Routing	IPv4 Static Routing IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP IPv6 Static Routing, IPv6 OSPFv3 IPv4 / IPv6 Multicast Routing PIM-SM/DM	• • • •	• • • •	• • • •
Security	IEEE 802.1x (RADIUS) ACL - Access Control Lists SSL/SSH & HTTPS Guest VLAN DHCP Snooping/IP Source Guard/ARP Guard TACACS+	• MAC, IP, TCP SSL/SSH & HTTPS • • •	• MAC, IP, TCP SSL/SSH & HTTPS • • •	• MAC, IP, TCP SSL/SSH & HTTPS • • •
Energy Efficiency	IEEE 802.3az Auto Port Power Down Dynamic Power Consumption Power Consumption	• • • 49 Watts	• • • 97 Watts	• • • 125 Watts
Physical	Desktop/Rackmount/Click Metal/Plastic Enclosure MTBF Acoustic Noise at 25°C Fan Width x Depth x Height Weight	R M 196,120 hours 36.9dBA Front to back Half-Width: 212 x 345 x 44 mm (8.35 x 13.58 x 1.73 in)	R M 192,898 hours 36.9dBA Front to back Half-Width: 212 x 345 x 44 mm (8.35 x 13.58 x 1.73 in)	R M 133,176 hours 35.8dBA Front to back 440 x 345 x 44 mm (17.32 x 13.58 x 1.73 in)
Electromagnetic Compliance	Class (A or B)	A	A	A
Warranty Hardware	Lifetime	Lifetime	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime	Lifetime	Lifetime
Modules	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/ AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/ AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/ AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/ AXM764/AXM765
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0313 PMB0334 PMB0353	PMB0314 PMB0334 PMB0354	PMB0314 PMB0334 PMB0354

Fully Managed Switches

Fully Managed, M4300 series (L3), Gigabit and 10-Gigabit

Fully Managed, M5300 series (L3), Gigabit and 10-Gigabit

Fully Managed, M6100 series (L3), Gigabit and 10-Gigabit




MODEL	M4300-48X (XSM4348CS)	M4300-96X (XSM4396K0 OR K1)	M5300-28GF3 (GSM7328FS)	M6100 SERIES (XCM8900)
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink) Fiber Ports 10Gig Module Bays	48 10GBase-T 4 combo SFP+ (10G)	Up to 96 10GBase-T Up to 96 SFP+ / 24 QSFP+	4 / 2 10GBase-T 24 SFP / 2 SFP+ (10G) 2 I/O 10G bays
PoE	Power Over Ethernet 802.3af Ports PoE Plus (30W) 802.3at Ports Total PoE Budget		Up to 48 Up to 48 Up to 1,440W	Up to 144 Up to 144, including UPOE 60W Up to 6,000W
Stacking	Number of Dedicated Stacking Ports Stacking Bandwidth Stacking (maximum capacity) Stacking Compatibility		Up to 16 10G or 40G ports 320 Gbps 8 switches M4300 series	2 or 4 48Gbps AX742 I/O bays 8 switches, 384 ports M5300, GSM72xxPS, GSM73xxSv2
Scalability	# MAC Addresses ARP Table - Size of # Routing Entries # ACL Rules	128,000 8,192 12,000 16,384 (ingress, egress)	256,000 8,192 12,000 16,384 (ingress, egress)	32,000 6,144 12,000 16K (ingress, egress)
System Management	Single IP Management Web Managed/GUI Command Line Interface/RS232 Console/Telnet SNMP Version RMON Group DHCP (Client/Server/Relay) Port Mirroring IPv6 full set	• • • v1, v2c, v3 1, 2, 3, 9 Client/Server/L3 Relay Many-to-One; RSPAN •	• • • v1, v2c, v3 1, 2, 3, 9 Client/Server/L3 Relay Many-to-One; RSPAN •	• • • v1, v2c, v3 1, 2, 3, 9 Client/Server/L3 Relay Many-to-One; RSPAN •
Quality of Service	Number of Priority Queues Traffic Prioritization Auto Voice VLAN	8 802.1p; Diffserv; TCP/UDP •	8 802.1p; Diffserv; TCP/UDP •	7 802.1p; Diffserv; TCP/UDP •
Multicast Filtering	IGMP Snooping Version IGMP Snooping Querier	v1, v2, v3 •	v1, v2, v3 •	v1, v2, v3 •
Performance	Bandwidth Buffer Memory Jumbo Frames	960Gbps 56Mb 9K	1,920 Tbps 96 Mb 9K	144Gbps 16Mb 12K
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s RPS Redundant Power Supply Modular Power Supply	802.1d, .1w, .1s; PV(R)STP Second optional AP5250W AP5250W	802.1d, .1w, .1s; PV(R)STP Second optional AP5600W or AP51200W AP51200W	802.1d, .1w, .1s; PV(R)STP RPS N+1 PSU Up to 4 or 8 AP51000W
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group Link Aggregation 802.3ad/LACP Discovery Protocol LLDP 802.1ab Rate Limiting Broadcast Storm Control	4,093 / 4,093 • • • •	4,093 / 4,093 • • • •	4,093 / 4,093 • • • •
L3 Routing	IPv4 Static Routing IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP IPv6 Static Routing, IPv6 OSPFv3 IPv4 / IPv6 Multicast Routing PIM-SM/DM	• • • •	• • • •	• • • •
Security	IEEE 802.1x (RADIUS) ACL - Access Control Lists SSL/SSH & HTTPS Guest VLAN DHCP Snooping/IP Source Guard/ARP Guard TACACS+	• MAC, IP, TCP SSL/SSH & HTTPS • • •	• MAC, IP, TCP SSL/SSH & HTTPS • • •	• MAC, IP, TCP SSL/SSH & HTTPS • • •
Energy Efficiency	IEEE 802.3az Auto Port Power Down Dynamic Power Consumption Power Consumption	• • • 237.2 Watts	• • • 566 Watts (without PoE) 2,006 Watts (max PoE)	• • • 55 Watts See online configurator
Physical	Desktop/Rackmount/Click Metal/Plastic Enclosure MTBF Acoustic Noise at 25°C Fan Width x Depth x Height Weight	R M 249,393 hours 40.3 dBA Front to back 440 x 345 x 44 mm (17.32 x 13.58 x 1.73 in)	R M 519,784 hours 35.8dBA (no PoE); 66.8dBA (max PoE) Front to back 440 x 535 x 88 mm (17.32 x 21.08 x 3.47 in)	R M 539,481 hours 35.6 dBA Front to back 432 x 442 x 176 mm (17.01 x 17.39 x 6.93 in)
Electromagnetic Compliance	Class (A or B)	A	A	A
Warranty Hardware	Lifetime	Lifetime	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime	Lifetime	Lifetime
Modules	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/ AXM763/AXM764/ AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/ AXM763/AXM764/ AXM765	AFM735, AGM731F/ AGM732F AX742, AX743/ AXM761/AXM762/ AXM763/AXM764/ AXM765	XCM8948/XCM8944/XCM8944F/ XCM8924X/XCM89P/XCM89UP; RPS4000v2, AGM731F/AGM732F/AGM734; AXM761/AXM762/AXM763, AXC761/ AXC763/AXC753, APS1000W, AFT603
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0314 PMB0334 PMB0354	PMB0314 PMB0334 PMB0354	PMB0314 PMB0334 PMB0354

Modules and Accessories for Switches


For use with managed switches

Gigabit Fiber Modules




MODEL	AGM731F	AGM732F	AGM734	AFM735
Product Description	SFP Transceiver 1000BASE-SX	SFP Transceiver 1000BASE-LX	SFP Transceiver 1000BASE-T	SFP Transceiver 100BASE-FX
Distance	Up to 550m	Up to 10km	Up to 100m	Up to 2km
Cabling Type	IEEE 802.3z 1000BASE-SX	IEEE 802.3z 1000BASE-LX	1000BASE-T	IEEE 802.3-2002 100BASE-FX
Connector	LC duplex	LC duplex	RJ45	LC duplex
Interface (Bus) Type	Small Form Factor Pluggable (SFP)	Small Form Factor Pluggable (SFP)	Small Form Factor Pluggable (SFP)	Small Form Factor Pluggable (SFP)
Form Factor	Plug-in module	Plug-in module	Plug-in module	Plug-in module
Data Transfer Rate	1 Gbps	1 Gbps	1 Gbps	100 Mbps
Hot-Swappable	•	•	•	•
Fiber Cable Support	50µm OM4 multimode (1000m); 50µm OM3 multimode (550m); 62.5µm OM1/OM2 multimode (275m)	9µm single mode (10km)	Copper CAT5E or better (1000Mbps Full Duplex only)	50µm/62.5µm OM1/OM2/OM3/OM4 multimode (2km)
Switch Compatibility	Select Smart Managed (Plus, Pro), Fully Managed Switches	Select Smart Managed (Plus, Pro), Fully Managed Switches	Select Smart Managed (Plus, Pro), Fully Managed Switches	Select Smart Managed (Plus, Pro), Fully Managed Switches
Warranty	5 Year	5 Year	5 Year	5 Year

10-Gigabit Copper and Fiber Modules



MODEL	AX742	AX743	AX745	AXM761	AXM762
Product Description	24 / 48 Gigabit Stacking Kit	I/O Module SFP+	I/O Module 10GBase-T	SFP+ Transceiver 10GBASE-SR	SFP+ Transceiver 10GBASE-LR
Distance	N/A	N/A	Up to 100m	Up to 500m	Up to 10km
Cabling Type	CX4 Cable	Fiber or DAC	CAT5/5E: GIGABIT CAT6: 10GBASE-T 30m CAT6A/7: 10GBASE-T 100m	10GBASE-SR "Short Reach"	10GBASE-LR "Long Reach"
Connector	CX4	SFP+	One RJ45 connection	LC duplex	LC duplex
Interface (Bus) Type	24/48 Gigabit High-speed Stacking	10-Gigabit Small Form Factor Pluggable (SFP+)	10-Gigabit 10GBASE-T	10-Gigabit Small Form Factor Pluggable (SFP+)	10-Gigabit Small Form Factor Pluggable (SFP+)
Form Factor	Plug-in module	I/O Module	I/O Module	Plug-in SFP+	Plug-in SFP+
Data Transfer Rate	12 Gbps Full-duplex (24 Gbps)	10 Gbps	10 Gbps	10 Gbps	10 Gbps
Hot-Swappable	•	•	•	•	•
Fiber Cable Support	NA	Depends on SFP+ optics	NA	50µm OM4 multimode (500m); 50µm OM3 multimode (300m); 62.5µm OM1/OM2 multimode (33m)	9µm single mode (10km)
Switch Compatibility	M5300 series (rear bays)	M5300 series (rear bays)	M5300 series (rear bays)	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches
Warranty	5 Year	5 Year	5 Year	5 Year	5 Year

10-Gigabit Copper and Fiber Modules




MODEL	AXM763	AXM764	AXM765	AXC761	AXC763
Product Description	SFP+ Transceiver 10GBASE-LRM	SFP+ Transceiver 10GBASE-LR Lite	SFP+ Transceiver 10GBASE-T	Passive SFP+ DAC 1m	Passive SFP+ DAC 3m
Distance	Up to 260m	Up to 2km	Up to 30m	1m	3m
Cabling Type	10GBASE-LRM Long Reach Multimode	10GBASE-LR "Lite"	10GBASE-T	Direct Attach Cable	Direct Attach Cable
Connector	LC duplex	LC duplex	RJ45	SFP+	SFP+
Interface (Bus) Type	10-Gigabit Small Form Factor Pluggable (SFP+)	10-Gigabit Small Form Factor Pluggable (SFP+)	10 Gigabit Small Form Factor Pluggable (SFP+)	10-Gigabit Small Form Factor Pluggable (SFP+)	10-Gigabit Small Form Factor Pluggable (SFP+)
Form Factor	Plug-in SFP+	Plug-in SFP+	Plug-in SFP+	SFP+ Cable	SFP+ Cable
Data Transfer Rate	10 Gbps	10 Gbps	10 Gbps	10 Gbps	10 Gbps
Hot-Swappable	•	•	•	•	•
Fiber Cable Support	62.5µm OM1/OM2 multimode (220m); 50µm OM3/OM4 multimode (260m)	9µm single mode (2km)	CAT6a / CAT7 (Copper)	NA	NA
Switch Compatibility	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches
Warranty	5 Year	5 Year	5 Year	5 Year	5 Year

Modules and Accessories for Switches

For use with managed switches

10-Gigabit Copper and Fiber Modules



MODEL	AXC765	AXC767	AXC7610	AXC7615	AXC7620
Product Description	Active SFP+ DAC 5m	Active SFP+ DAC 7m	Active SFP+ DAC 10m	Active Optical SFP+ DAC 15m	Active Optical SFP+ DAC 20m
Distance	5m	7m	10m	15m	20m
Cabling Type	Direct Attach Cable	Direct Attach Cable	Direct Attach Cable	Direct Attach Cable	Direct Attach Cable
Connector	SFP+	SFP+	SFP+	SFP+	SFP+
Interface (Bus) Type	*10 Gigabit Small Form Factor Pluggable (SFP+)*	*10 Gigabit Small Form Factor Pluggable (SFP+)*	*10 Gigabit Small Form Factor Pluggable (SFP+)*	*10 Gigabit Small Form Factor Pluggable (SFP+)*	*10 Gigabit Small Form Factor Pluggable (SFP+)*
Form Factor	SFP+ Cable	SFP+ Cable	SFP+ Cable	SFP+ Cable	SFP+ Cable
Data Transfer Rate	10 Gbps	10 Gbps	10 Gbps	10 Gbps	10 Gbps
Hot-Swappable	•	•	•	•	•
Fiber Cable Support	NA	NA	NA	NA	NA
Switch Compatibility	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches	Select Unmanaged, Smart Managed (Plus, Pro), Fully Managed Switches
Warranty	5 Year	5 Year	5 Year	5 Year	5 Year

Modular Power Supply



MODEL	APS135W	APS150W	APS250W	APS550W
Product Description	135-Watt Modular Power Supply	150-Watt Modular Power Supply	250-Watt Modular Power Supply	550-Watt Modular Power Supply
Hot-Swappable	When used with an RPS	When 2 PSUs	When 2 PSUs	When 2 PSUs
Switch Compatibility	M5300 series (non-PoE versions)	M4300 series (1G non-PoE models)	M4300 series (10G models)	M4300 series (PoE PA models)
Warranty	5 Year	5 Year	5 Year	5 Year

Modular Power Supply



MODEL	APS600W	APS1000W	APS1200W	RPS4000v2
Product Description	600-Watt Modular Power Supply	1,000-Watt Modular Power Supply	1,200-Watt Modular Power Supply	Redundant/External Power Supply (RPS/EPs for up to 4 switches)
Hot-Swappable	When 2 PSUs	Yes	When 2 PSUs	Yes
Switch Compatibility	M4300-96X	RPS4000v2, M4300 series (PoE PB models), M6100	M4300-96X	S3300 (PoE), M4100, M4300 (48 PoE models), M5300, M6100
Warranty	5 Year	5 Year	5 Year	5 Year

WIRELESS DESIGNED WITH EACH SMALL AND MEDIUM BUSINESS IN MIND



ESSENTIALS WIFI
 Micro business
 1 room – 1 site
 No IT expertise
 10 connections per AP



ORBI PRO
 Small business
 No-wire installation
 No IT expertise
 40 connections per AP



INSIGHT MANAGED SMART CLOUD
 Small business
 Multi-site
 No IT/limited expertise
 100 connections per AP




PREMIUM WIFI
 Medium business
 Multi-site
 IT expertise
 200 connections per AP

WIRELESS

INTRODUCING ONE-TOUCH WIRELESS VISIBILITY & MANAGEMENT

NETGEAR introduces the new IT revolution for small businesses with "One-touch connectivity" with Insight management app. Experience easy set-up, remote management and full control of your wireless network. With 20 years of experience in small & medium business networking, NETGEAR is now delivering wireless connectivity that "just works" at your fingertips.

NETGEAR Insight enables multi-device configuration of your NETGEAR Insight Managed wireless access points, either locally or remotely. It provides network management, monitoring and service deployment across multiple remote and local sites for the easiest and most user-friendly wireless networking experience. Anywhere management also includes Insight Managed switches and Business-Class ReadyNAS on top of Insight Managed Wireless Access points, enabling whole network visibility and management. Insight app also allows you discover select wired and wireless devices from your local or remote network.

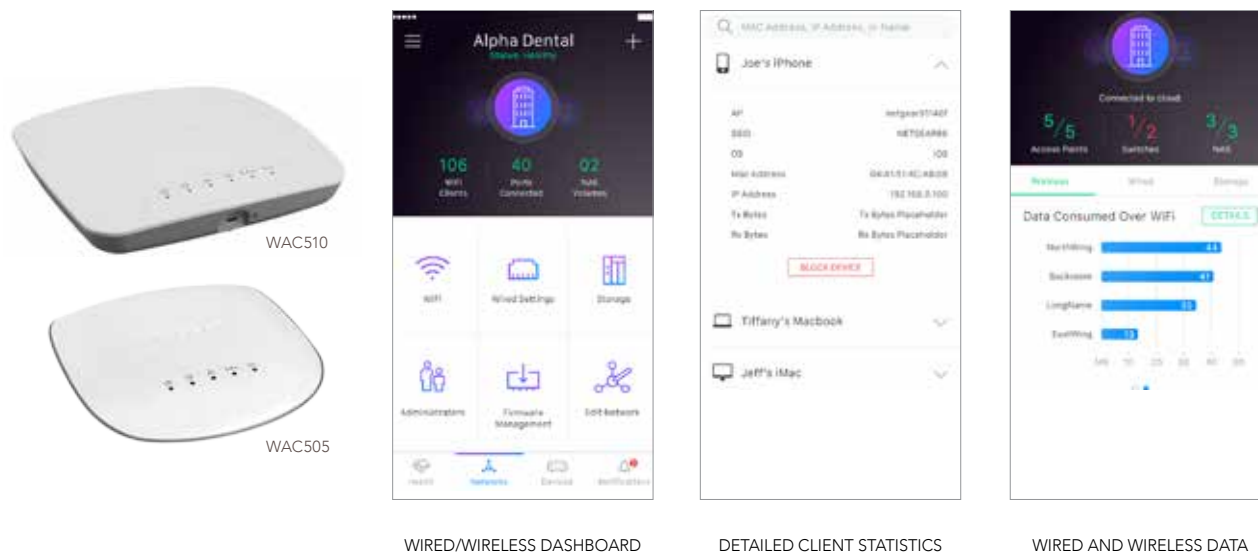

BUSINESS FEATURES FOR HIGHER SPEED, GREATER COVERAGE AND HIGHER DENSITY WIFI

- Business class WiFi with superior Wave 2 802.11ac performance and range
- 2x2 with 2 streams of data for aggregate throughput of up to 1.2Gbps (300 Mbps at 2.4GHz and 867 Mbps at 5GHz)
- Multi-User Multiple In Multiple Out (MU-MIMO) avoids congestion and ensures performance in high client density deployments like public WiFi hotspots
- One Ethernet port, with Power-over-Ethernet (PoE) for ease of deployment (PoE switch & AC/DC power adapter are sold separately)
- One-touch network visibility. Anywhere. - Smart Cloud remote app management for unrivaled mobile management experience of your wireless network
- App managed, through NETGEAR Insight app for one-touch installation and management of all your WAC505 and WAC510 Access Points, no additional hardware needed
- Market leading 5-year warranty with 24x7 chat support for peace of mind

DIY WIFI FOR SMALL BUSINESSES WITH ORBI PRO WIFI SYSTEM



The Orbi™ Pro Tri-band WiFi System for Small Businesses with patented FastLane3 technology joins the award-winning Orbi Tri-band Home WiFi System product family as the industry's first purpose-built WiFi solution specifically designed for small business owners to install themselves. The Orbi Pro Tri-band WiFi System provides growing businesses with secure, reliable, and blazing fast WiFi.

Orbi Pro is the perfect WiFi solution for commercial locations such as professional offices, restaurants, retail, or bed and breakfast inns, which would benefit from easy to set up WiFi. With Orbi Pro, there is no wiring, professional installation, or added IT costs.

Orbi Pro is also a "Network-in-a-box" (Router + WiFi + Switch) for small businesses. The router and satellite have 7 Gigabit ports together that can be considered as a switch thanks to a dedicated wireless backhaul. 4 of these ports are on the satellite and can be placed anywhere to support business needs. Orbi Pro can be easily installed using the Orbi app or the web GUI and monitored from anywhere with the Insight management solution for ultimate control and peace of mind.

Better WiFi for Business. Everywhere.

Orbi Pro AC3000 Tri-band WiFi System

Up and running in minutes, wire-free installation, app management

3 Secure, separate WiFi networks

Guest portal with instant customization

5,000 sq.ft. coverage (expandable to 10,000 with 2 additional satellites)

Desktop, wall-mount, ceiling-mount

Ideal for retail, shops, small businesses and offices






BRING YOUR BUSINESS WIFI TO THE OUTDOORS

Add-on Orbi Pro Outdoor Satellite (RBS50Y)

Extend high-performance WiFi coverage outdoors by up to an extra 2,500 sq. ft. with this weather-resistant, add-on Orbi Outdoor Satellite. Enjoy uninterrupted WiFi for your guests on your terrace or parking lot. Requires Orbi Pro Router included with your existing Orbi Pro WiFi System.

Expand your Orbi Pro WiFi reach with Daisy Chain

Daisy chain your Orbi Pro Satellites to extend the coverage of your Orbi Pro WiFi System range. This feature allows the Satellite to dynamically pick the best way to connect to the Router. With the latest firmware update, Orbi Pro supports both daisy chain and star network topologies.

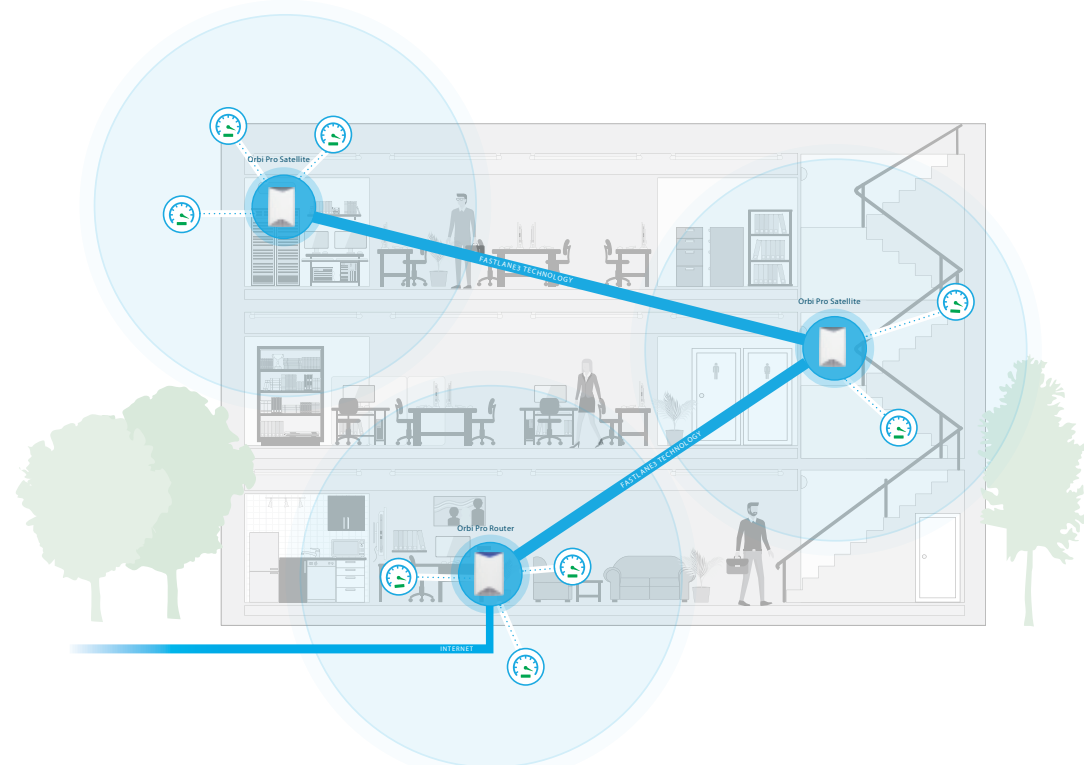

With daisy chain networking, your satellites can connect to each other or to the router, depending on which connection is best. With the addition of the Orbi Pro Outdoor satellite, daisy chain makes it even easier to expand your network outside, even if it is far from the Orbi Pro Router.



PRODUCT	SRK60
Features	<ul style="list-style-type: none"> • Up to 80 connections with high-performance WiFi. This kit includes an Orbi Pro WiFi Router and an Orbi Pro Satellite • Fast, dedicated WiFi connection between the Orbi Pro Router and Satellite similar to a wired Ethernet connection without having to run an Ethernet cable • Innovative Tri-band WiFi helps maximize the Internet speeds available in your business • Easy setup with a single and secure WiFi network that works with your existing Internet service • Traffic separation between 3 SSIDs, one for Guest WiFi network with dedicated guest portal • Use the Orbi app or any web browser to create secure, business grade WiFi in minutes. • Advanced security options include WiFi Protected Access® (WPA/WPA2-PSK), VPN support for secure remote access, restricted access to users and websites, and more • Can be mounted to the ceiling or a wall in an instant
Tech specs	<p>Orbi AC3000 Router and AC3000 Satellite (1,733 + 866 + 400Mbps)†</p> <ul style="list-style-type: none"> • Simultaneous Tri-band WiFi • Radio 1: IEEE® 802.11b/g/n 2.4GHz–256QAM support • Radio 2: IEEE® 802.11a/n/ac 5GHz–256QAM support • Radio 3: IEEE® 802.11a/n/ac 5GHz–256QAM support • Six (6) high-performance antennas with high-power amplifiers • Implicit/Explicit Beamforming for 2.4 & 5GHz bands (1,733 + 866 + 400Mbps)† • MU-MIMO capable for simultaneous data streaming on multiple devices • Eight (8) 10/100/1000Mbps Gigabit Ethernet ports • 1 WAN & 3 LAN for Router • 4 LAN for Satellite
Add-ons	<ul style="list-style-type: none"> • SRS60 add-on satellite • RBS50Y Outdoor Orbi Satellite • One router can support up to 3 satellites in total
Box contents	<ul style="list-style-type: none"> • One (1) Orbi Pro Router (SRR60) • One (1) Orbi Pro Satellite (SRS60) • Two (2) wall mounts with screws • Two (2) ceiling mounts with screws • One (1) 2m Ethernet cable • Two (2) 12V/3.5A power adapters • Quick start guide
Compatibility	Orbi Pro Router does not support and will not pair with Orbi Home WiFi System Satellites.
Management	• Orbi Pro can be setup through the Orbi app or the Orbi Pro web GUI. Also discover, register and monitor your Orbi Pro from anywhere with the Insight app and Insight Cloud Portal.



Experience AC WiFi with our wireless AC Access Points.
Just pick the one that fits your needs!



MODEL	WAC104	ORBI PRO	WAC505	WAC510	WAC720	WAC730	WAC740
Description	Dual Band 802.11ac Access Point	Wireless-AC Dual Band Wave 2 AP	Insight Managed Smart Cloud Wireless Access Point	Insight Managed Smart Cloud Wireless Access Point	Wireless-AC Dual Band Business AP	Wireless-AC Dual Band Premium AP	Wireless-AC Dual Band Wave 2 AP
Typical Deployment	High performance small and home office	Small customer wire-free deployment - Network-in-a-box	Small to Mid-size customers for ease of deployment	Small to Mid-size customers for ease of deployment	Medium enterprise, high schools with advanced Wi-Fi, hotel, mid-size hospital	Medium enterprise, high schools with advanced Wi-Fi, hotel, mid-size hospital	Mid to Large enterprise, higher education with advanced Wi-Fi, hotel, hospital
WiFi Standard	802.11ac	802.11ac	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac
Antennas/max throughput	2x2/1.2 Gbps	2x2/4x4 backhaul/3Gbps	2x2/1.2 Gbps	2x2/1.2 Gbps	2x2/1.2 Gbps	3x3/1.7 Gbps	4x4/2.4 Gbps
Router configuration		Yes		Yes			
Management	Standalone	Standalone / Orbi app	Standalone Insight app	Standalone Insight app	Standalone Ensemble Business Central Controller	Standalone Ensemble Business Central Controller	Controller

Wireless Controllers



Business Central™ Wireless Cloud Manager



Premium Wireless Controller



Wireless Controller



Wireless Controller

MODEL	Business Central	WC9500	WC7600v2	WC7500
Product Description	Business Central Wireless Cloud Manager	WC9500 Wireless Controller	WC7600 Wireless Controller	WC7500 Wireless Controller
Typical Deployment	Multi-sites, distributed branches, coffee shops, retail stores, small offices, managed by Managed Service Providers	Mid to large enterprise with premium Wi-Fi, colleges/universities, hotels, mid-sized healthcare	Medium enterprise with high throughput and high density Wi-Fi, K-12, hotels/motels, small hospitals	Medium enterprise with advanced Wi-Fi, K-12, small hotels/motels, small hospitals
HARDWARE				
# of Ethernet Ports		3	4	4
Speed of Ethernet Ports		2 x 1/10 Gbps 1 x 10/10/100/1000Mbps	4 x 10/100/1000 Mbps	4 x 10/100/1000 Mbps
Physical Size		440 x 430 x 43 mm	261 x 430 x 44 mm	261 x 430 x 44 mm
SUPPORTED AP				
WND930	Future	•	•	•
WAC740	Future	•	•	•
WAC730	•	•	•	•
WAC720	•	•	•	•
11n access points (WNDAP660, 360, 350, 320, 210)	•	•	•	•
WN370	Future	•	•	•
CAPACITY				
# of managed AP	Unlimited	200 per controller	50 per controller	15
Stacking		•	•	
# of units per stack		3	3	
MANAGEMENT				
HTTP	•	•	•	•
SNMP		•	•	•
Telnet		•	•	•
SSH		•	•	•
FEATURES				
Central configuration	•	•	•	•
Multiple SSIDs, VLANs	•	•	•	•
Automatic RF Management		Dynamic	Dynamic	Dynamic
Multi-Tenancy	•			
Predeployment RF Planning		•	•	•
Heatmap		•	•	•
Self healing wireless network	•	•	•	•
Dynamic load balancing	•	•	•	•
L2 fast roaming	•	•	•	•
L3 fast roaming (seamless across subnet)		•	•	•
Built-in AAA server, LDAP support	•	•	•	•
Captive portal with guest management	•	•	•	•
ORDERING				
Warranty	Per Subscription	Lifetime	Lifetime	Lifetime
Product Ordering SKU	WM1AP1YL-10000S WM1AP3YL-10000S WM10AP1YL-10000S WM10AP3YL-10000S WM50AP1YL-10000S WM50AP3YL-10000S	WC9500-10000S WC9500-100PRS	WC7600-20000S WC7600-200PRS	WC7500-100NAS WC7500-100AUS WC7500-100PES WC7500-100UKS
5 or 10 AP License Ordering SKU	See Above	Incremental 10-AP Upgrade - WC10APL-10000S Incremental 50-AP Upgrade - WC50APL-10000S Incremental 100-AP Upgrade - WC100APL-10000S Incremental 200-AP Upgrade - WC200APL-10000S	Incremental 10-AP Upgrade - WC10APL-10000S Incremental 50-AP Upgrade - WC50APL-10000S	WC05APL-10000S
ProSUPPORT Maintenance PKGS				
OnCall 24x7 1-year	PMB0311	PMB0311	PMB0313	PMB0314
OnCall 24x7 3-year	PMB0331	PMB0331	PMB0333	PMB0334
OnCall 24x7 5-year	PMB0351	PMB0351	PMB0353	PMB0354

Wireless Access Points

11AC Access Points



MODEL	WAC104	WAC505	WAC510	ORBI PRO	RBS50Y
Product Description	Dual Band 802.11ac Access Point	Insight Managed Smart Cloud Access Point	AC WiFi Business AP with NETGEAR® Insight app for easy management	AC3000 Tri-band WiFi System	Orbi Outdoor Satellite
Typical Deployment	High performance small and home office	Medium and micro business sites	Small to Mid-size customers for ease of deployment	SMB businesses	Outdoor use
WIRELESS					
Standard	802.11ac	802.11ac Wave 2	802.11 a/b/g/n/ac	802.11ac Wave 2	802.11 b/g/n/a/ac
Dual Band	concurrent	concurrent	concurrent		Tri band
2.4 GHz	•	•	•	•	•
5 GHz	•	•	•	•	•
TX by Rv	2 x 2 (2.4GHz)	2x2 (2.4 and 5GHz)	2 x 2	4x4, 2x2 5GHz, 2x2 2.4GHz	2x2 front haul and 4x4 backhaul
Throughput per Radio	300/867 Mbps	300/867Mbps, (2.4/5GHz)	300/867Mbps	1,733 + 866 + 400Mbps, (5, 2.4GHz)	1,733 + 866 + 300Mbps, (5, 2.4GHz)
Max # of Concurrent Clients (standalone)	128	100	200	40	2.4GHz front haul x 127 and 5GHz front haul x 127
HARDWARE					
# of Ethernet Ports	4	1	2	4	0
Speed of Ethernet Ports	10/100/1000Mbps	10/100/1000Mbps	10/100/1000Mbps	10/100/1000Mbps	
PoE		•	•		
Antenna Type	External	Internal	Internal	Six (6) high-performance antennas with high-power amplifiers	Copper dipole antenna
Antenna Gain	3dBi	3/6dBi (2.4/5GHz)	3dBi (2.4GHz) 6dBi (5GHz)		3dBi
Physical Size	240 x 181 x 41mm	175 x 165 x 35 mm (6.89 x 6.49 x 1.38 in)	197x 197 x 37mm	6.8 x 3.3 x 9.7 in (174 x 85 x 247 mm)	8.3 x 2.7 x 10.6 in
Enclosure Material	Plastic	Plastic	Plastic	Plastic	Plastic & Metal in the back
Kensington Lock		•	•		
Ceiling/Wall Mounting		•	•	•	Wall Mounting
Power Consumptions (W) Max	8.1	8.9w	9		19.21 W
MANAGEMENT					
Deployment Options	Standalone	Standalone / Insight	Standalone / Insight	Standalone	Wall, desktop
FEATURES					
# of BSSIDs	1	8	8	3	3
WEP	•	•	•	•	•
WPA-PSK/TKIP	•	•	•	•	•
WPA2-PSK/AES	•	•	•	•	•
802.1X			•	•	•
Rogue AP Detection			•	•	•
WIDS/WIPS			•	•	•
Wireless Distribution Systems	•	•	•	•	•
Repeater		•	•	•	•
Point-to-Point/Multi-Point	•	•	•	•	•
Simultaneous Bridge/Client Association	•	•	•	•	•
Captive Portal		•	•	•	Works with Orbi Pro to support
VLANs		•	•	•	•
MAC ACL	•	•	•	•	•
802.11e/WMM	•	•	•	•	•
Rate Limiting	•	•	•	•	•
Bandwidth Management					
Beamforming		•	•	•	•
Bandsteering	•	•	•	•	•
ORDERING					
Warranty	3 years	5 years	5 years	5 years	1 year
Product Ordering SKU	WAC104-100NAS WAC104-100AUS WAC104-100PES WAC104-100UKS WAC104-100INS	WAC505-100NAS WAC505-10000S	WAC510-10000S WAC510-100NAS	SRK60-100NAS SRS60-100NAS	RBS50Y-100NAS
ProSUPPORT Maintenance PKGS					
OnCall 24x7 1-year	PMB0S11	PMB0S11	PMB0S12	PMB0311	PMB0S12
OnCall 24x7 3-year	PMB0S31	PMB0S31	PMB0S32	PMB0331	PMB0S32
OnCall 24x7 5-year	PMB0S51	PMB0S51	PMB0S52	PMB0351	PMB0S52

Wireless Access Points

11AC and 11N Access Points



MODEL	WAC720	WAC730	WAC740	WND930	WN370
Product Description	Wireless-AC Dual Band Business AP	Wireless-AC Dual Band Premium AP	Wireless-AC Dual Band Wave 2 AP	Dual Band High Power 802.11n Outdoor AP	Wireless-N Wall Mount Access Point
Typical Deployment	Medium enterprise, high schools with advanced WiFi, hotel, mid-size hospital	Medium enterprise, high schools with advanced WiFi, hotel, mid-size hospital	Mid to Large enterprise, higher education with advanced WiFi, hotel, hospital	Outdoor deployment for schools, hotels, and medium enterprise	Hotels, motels, school dormitories
WIRELESS					
Standard	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac	802.11 a/b/g/n/ac	802.11 a/b/g/n	802.11 b/g/n
Single Band					•
Dual Band	• (concurrent)	• (concurrent)	• (concurrent)	• (concurrent)	
2.4 GHz	•	•	•	•	•
5 GHz	•	•	•	•	
TX by Rv	2 x 2	3 x 3	4 x 4	2 x 2	2 x 2
Throughput per Radio	300/867Mbps	450/1300Mbps	600/1700Mbps	300/300 Mbps	300Mbps
Max # of Concurrent Clients (standalone)	256	256		128	N/A
Max # of Concurrent Clients (managed)	128	128	128	128	64
HARDWARE					
# of Ethernet Ports	1	1	2	3	4 (LAN) + 1 (uplink) + 2 (voice)
Speed of Ethernet Ports	10/100/1000Mbps	10/100/1000Mbps	1G/2.5G Multi-Gig Ethernet 10/100/1000Mbps	10/100/1000Mbps	4 x 10/100Mbps + 1 (1G) 2 (voice)
PoE	•	•	•	•	•
Antenna Type	Internal	Internal	Internal	Internal/External	Internal
Antenna Gain	5dBi (2.4GHz) 6dBi (5GHz)	5dBi (2.4GHz) 6dBi (5GHz)	5dBi (2.4GHz) 6dBi (5GHz)	5dBi (2.4GHz) 7dBi (5GHz)	5 dBi
Additional External Antenna Connectors	two 2.4/5GHz reverse SMA	three 2.4/5GHz reverse SMA	four 2.4/5GHz reverse SMA	two 2.4 GHz and two 5 GHz female type N	
Plenum				IP67	
Physical Size	197 x 197 x 40mm	197 x 197 x 40mm	197 x 197 x 40mm	255 x 255 x 78mm	135 x 93 x 26mm
Enclosure Material	Plastic front - Metal Gray back	Plastic front - Metal Gray back	Plastic front - Metal White back	Plastic front - Metal back	Plastic
Kensington Lock	•	•	•	•	
Ceiling/Wall Mounting	•	•	•	•	wall (junction box)
Power Consumptions (W) Max	11	12.9	17.9	15.2W (heater off)	5.1 Watts
MANAGEMENT					
Deployment Options	Standalone / Ensemble / Business Central / Controller (WC7500/ WC7600/9500)	Standalone / Ensemble / Business Central / Controller (WC7500/ WC7600/9500)	Controller (WC7500/ WC7600/9500)	Standalone / Controller (WC7600/WC9500)	Controller (WC7600/9500)
Business Central Management	•	•		Future	Future
SNMP	•	•	•	•	•
FEATURES					
# of BSSIDs	16	16	16	1	8
WEP	•	•	•	•	•
WPA-PSK/TKIP	•	•	•	•	•
WPA2-PSK/AES	•	•	•	•	•
802.1X	•	•	•	•	•
Rogue AP Detection	•	•	•	•	•
WIDS/WIPS	•	•	•	•	•
Wireless Distribution Systems (WDS)	•	•	•	•	•
Repeater	•	•	•	•	•
Point-to-Point/Multi-Point	•	•	•	•	•
Simultaneous Bridge /Client Association	•	•	•	•	•
Captive Portal	•	•	•	•	•
VLANs	•	•	•	•	•
MAC ACL	•	•	•	•	•
802.11e/WMM	•	•	•	•	•
Rate Limiting	•	•	•	•	•
Bandwidth Management					
Beamforming	•	•	•	•	•
IPv6	•	•	•	•	•
Bandsteering	•	•	•	•	•
ORDERING					
Warranty	Lifetime	Lifetime	Lifetime	2 years	Lifetime
Product Ordering SKU	WAC720-10000S WAC720-100NAS	WAC730-10000S WAC730-100NAS	WAC740-10000S WAC740-100NAS	WND930-1000S WND930-100NAS	WN370-10000S
ProSUPPORT Maintenance PKGS					
OnCall 24x7 1-year	PMB0311	PMB0311	PMB0311	PMB0311	PMB0311
OnCall 24x7 3-year	PMB0331	PMB0331	PMB0331	PMB0331	PMB0331
OnCall 24x7 5-year	PMB0351	PMB0351	PMB0351	PMB0351	PMB0351

WIRELESS LAN ANTENNAS AND CABLES

NETGEAR wireless antennas can be used in conjunction with Wireless Access Points to boost wireless signals across a building or campus. NETGEAR low-loss cables with 2 Reverse SMA Connectors extend the length between NETGEAR wireless access points or routers and the external antenna without sacrificing range. NETGEAR low-loss cables with 2 Reverse SMA Connectors extend the length between NETGEAR wireless access points or routers and the external antenna without sacrificing range.



MODEL	ANT24501B	ANT224D10	ANT2409	ANT2511AC
Description	NETGEAR Outdoor Dual Band Omni Antenna Bundle Kit	10 dBi 2x2 indoor/outdoor directional antenna -ANT224D10	9 dBi Omni-directional Antenna - ANT2409	Wireless AC Dual Band Antenna - ANT2409
Wireless Mode	IEEE 802.11 a/b/g/n	IEEE 802.11n	IEEE 802.11g	IEEE 802.11 a/b/g/n/ac
Typical Application	Outdoor for wireless client access	Indoor/Outdoor	Any 11n Indoor Access Point	External antenna for 700 series wireless access points
Recommended Access Point	WND930 Outdoor AP	Any 11n Indoor Access Point	WAG302, WG302, WG102, FWG114Pv2, FWG114P, and DG824M	WAC720, WAC730, WAC740
Maximum Outdoor Range	1.6 km (1 mile)	8.5 km (5.28 miles) ¹	11.5 km (7.2 miles) ²	
Frequency Range	2400 - 2500MHz 4900 - 5850MHz	2400 - 2500MHz	2400 - 2485MHz	2.4 to 2.5 GHz and 4.9 to 5.85 GHz
Gain	5dBi (2.4GHz) 7dBi (5GHz)	10dBi ³	9dBi ³	2.5 dBi (2.4 GHz) and 4 dBi (5 GHz)
Beam Width	Horizontal 360° Vertical 11°	Horizontal 33° Vertical 32°	Horizontal 360° Vertical 30°	Horizontal 360° Vertical 75° (2.4 GHz) and Horizontal 360° Vertical 22.5° (5 GHz)
Polarization	Linear; Vertical	Linear; Vertical	Vertical	Linear; Vertical
Operational Temperature	-20° to +60°C (-4° to 140°F)	-30° to 80°C (-22° to 176°F)	-30° to 80°C (-22° to 176°F)	-20°C to +60°C
Dimensions	215 x 22 x 11mm (8.5 x 0.9 x 0.4in)	240 x 240 x 40mm (9.45 x 9.45 x 1.57in)	625 x 75 x 56mm (24.6 x 2.95 x 2.2in)	185 x 36.2 x 12.7 mm (7.283 x 1.425 x 0.5 in)
Weight	.2kg (0.4lb)	.7kg (1.54lb)	.9kg (2lb)	0.025 kg (0.055116 lb)
Connectors	N-Plug Male	· Antenna - N Jack Male · Lightning arrestor - N Jack Male to N Jack Male · Extended Cable - N Plug Female	· Antenna - Reverse N female · Lightning arrestor - Reverse N female · Adapter - Reverse SMA	RP SMA-PlugZ (SMA Male Reverse)
Package Contents	· 2 x 2.4GHz omni directional antennas · 2 x 5GHz omni directional antennas · Installation guide	· NETGEAR Indoor/ Outdoor 10dBi 2x2 Directional Antenna ANT224D10 · 2 lightning arrestors with 30 cm low-loss cables · 2 reverse N/SMA adapters · Wall mount and pole mounting hardware · Installation Guide and Warranty/ Support card	· Indoor/Outdoor 9dBi Omni-directional · Antenna - ANT2409 (cable required, sold separately) · Wall and pole mount brackets and hanging materials · One reverse N type to reverse SMA adapter · 2 m low-loss antenna cable (connection for lightning arrestor) · Lightning arrestor · Installation guide and Warranty/ support card	· 1 x 2.4/5GHz omni directional antenna · Installation guide
Warranty*	2-year			
Ordering Information (all regions)	ANT24501B-10000S	ANT224D10-10000S	ANT2409-20000S	ANT2511AC-10000S

¹ Range estimation is based on FCC-compliant operation of two (2) 802.11 APs each with two (2) ANT224D10 antennas, 3 m antenna cables, and lightning arrestors installed. With the antennas positioned 26 m above the ground, data rate should sustain 1 Mbps under ideal line-of-sight conditions.

² Range estimation is based on FCC-compliant operation of two (2) 802.11 APs each with two (2) ANT2409 antennas, 1 m antenna cables, and lightning arrestors installed. With the antennas positioned 27 m above the ground, data rate should sustain 1 Mbps under ideal line-of-sight conditions.

³ Gain: A ratio of decibels to an isotropic antenna that is commonly used to measure antenna coverage.

MODEL	ACC-10314-01	ACC-10314-03	ACC-10314-04
Cable Length	1.5m (4.9ft)	5m (16.4ft)	10m (32.8ft)
Maximum Cable Loss with Connectors	1.4dB	3.7dB	7.0dB
Weight	50g (1.76oz)	225g (7.94oz)	440g (15.53oz)
Attenuation	0.21dB/ft maximum or .659dB/m maximum at 2.5GHz		
Operating Temperature	-40° to 75°C (-40° to 167°F)		
Minimum Bend Radius	26mm (1in)		
Connectors	Reverse SMA female (both ends)		
Package Size	450 x 280 x .12mm (17.72 x 11.02 x .004in)		
Warranty*	2-year		
Ordering Information (all regions)	1.5 meter cable ACC-10314-01	5 meter cable ACC-10314-03	10 meter cable ACC-10314-04



STORAGE

GET THE MOST SECURE NETWORK STORAGE AND BACKUP WITH READYNAS

NETGEAR® ReadyNAS® This is a data based economy. Most companies utilize data for different aspects of their business. Without an exception, data backup is part of any operational plan and every business continuity plan. If you are looking for a data backup solution, ReadyNAS is the leader in the industry for SMBs – limited budget, but highly scalable with enterprise class reliability and security.

Your data. Your Business. Protected.

Most secure network storage & back up

- Hybrid backup (on premises + Cloud) with automatic data backup to ReadyNAS and to public Cloud – Amazon AWS Cloud, Dropbox, Google Drive, OneDrive, Azure
- Disaster Recovery - Automatic and incremental, block level backup to a secondary ReadyNAS
- Guard against ransomware based on Snapshot technology
- 5 levels of data protection against mechanical, physical, virus, malware, human, full system
- Better data robustness, repair, data protection, full journaling for data repair

Highest performance & access speed

- Fast access to data, more simultaneous users, faster encryption processing for higher security, higher workload virtualization thanks to latest and fastest Intel processor technology
- 10 GbE connectivity is more than half of the ReadyNAS models
- ReadyNAS software uses Linux 4 kernel that offers security enhancements & better performance
- Plex streaming – Multi-core processor with Full HD transcoding (ideal use for 200 and 420 desktop series)



Cloud backup to Amazon, Dropbox, OneDrive, Google Drive, Azure



Monitor and manage your ReadyNAS from the palm of your hand through the NETGEAR Insight app (all except ReadyNAS 100 series)



Best protection against ransomware with Industry's only block level hourly configurable Snapshot technology



High-end desktop ReadyNAS and rackmount NAS are optimized for virtualized environments with VMWare



Just pick the one that's best for you!

DESKTOP



SERIES NUMBER	210 SERIES	420 SERIES	520 SERIES	620 SERIES
Description	Media Storage Hub for the Home Office	High-performance Business Storage	Premium Performance Business Storage	Ultimate Performance Business Storage
Typical Deployment	SOHO	SMB	Medium offices, creative professionals	Large offices, creative professionals
Number of users	Up to 12	Up to 40	Up to 80	Up to 120
Number of bays	2 or 4 Bays	2, 4, 6 or 8 Bays	4, 6 or 8 Bays	6 or 8 Bays
Connectivity	1Gb	1Gb	10Gb	10 Gb
Management	Web management for all models and/or NETGEAR Insight app management for OS 6.6 and above	Web management for all models and/or NETGEAR Insight app management for OS 6.6 and above	Web management for all models and/or NETGEAR Insight app management for OS 6.6 and above	Web management for all models and/or NETGEAR Insight app management for OS 6.6 and above

RACKMOUNT



SERIES NUMBER	2000 SERIES	3000 SERIES	4000 SERIES
Description	High-performance Rackmount storage	Premium performance Rackmount storage	Ultimate performance Rackmount Storage
Typical Deployment	Small office	Medium Office	Large Office
Number of users	Up to 40	Up to 120	Up to 160
Number of bays	4 or 12 Bays	4 or 12 Bay	12 or 60 Bays
Connectivity	1Gb	1Gb	10Gb (Copper or Fiber)
Management	Web management for all models and/or NETGEAR Insight app management for OS 6.6 and above	Web management for all models and/or NETGEAR Insight app management for OS 6.6 and above	Web management for all models and/or NETGEAR Insight app management for OS 6.6 and above

BUSINESS VIDEO SURVEILLANCE FROM NETGEAR

As video surveillance has become a common means of protecting businesses and their customers and visitors, scalability & flexibility of video systems has become a major challenge, both for supporting more types and quantity of cameras and for storing ever-increasing amounts of video data.

NETGEAR brings together the best of its network storage and IP camera solutions to provide integrated components for a flexible and scalable IP Video Surveillance solution for Small and Medium Businesses.

World class video management and storage – Milestone Arcus on ReadyNAS



MOST SCALABLE SOLUTION

Highest storage capacity ranging from 2 to 60 bay, support of 1 to 100 HD cameras with easy coverage expansion by the addition of a NETGEAR PoE switch for distant deployment.



TOTAL PROTECTION OF YOUR ASSETS

Experience the best data retention with ReadyNAS 5 level of data protection and hybrid remote NAS and Cloud backup.



WORLD-CLASS SURVEILLANCE FROM THE EXPERTS

Two world class technology leaders combine forces to offer the most trusted video protection of the market.

Milestone Arcus on ReadyNAS is a free downloadable app that runs on all NETGEAR Business Class ReadyNAS models, which are capable of handling up to one hundred high definition and high frame rate cameras, and offer various storage capacities, from several weeks to over a year continuous video recording.


Market first Wire-Free ONVIF IP Camera System



NETGEAR FlexPower is the first wire-free, ONVIF® compliant IP camera for small business surveillance. This weather-resistant, battery-powered, wire-free camera offers the simplest installation and the flexibility to be mounted in places where power cables just can't reach. The FlexPower Base Station provides secure wireless connectivity for up to 4 FlexPower cameras, while enabling extended battery life and ONVIF® compliance for FlexPower cameras. With its flexible mounting options, the Base Station can be installed on the ceiling wall, or placed on any flat surface.



Integrated Components for the most flexible & scalable surveillance solution

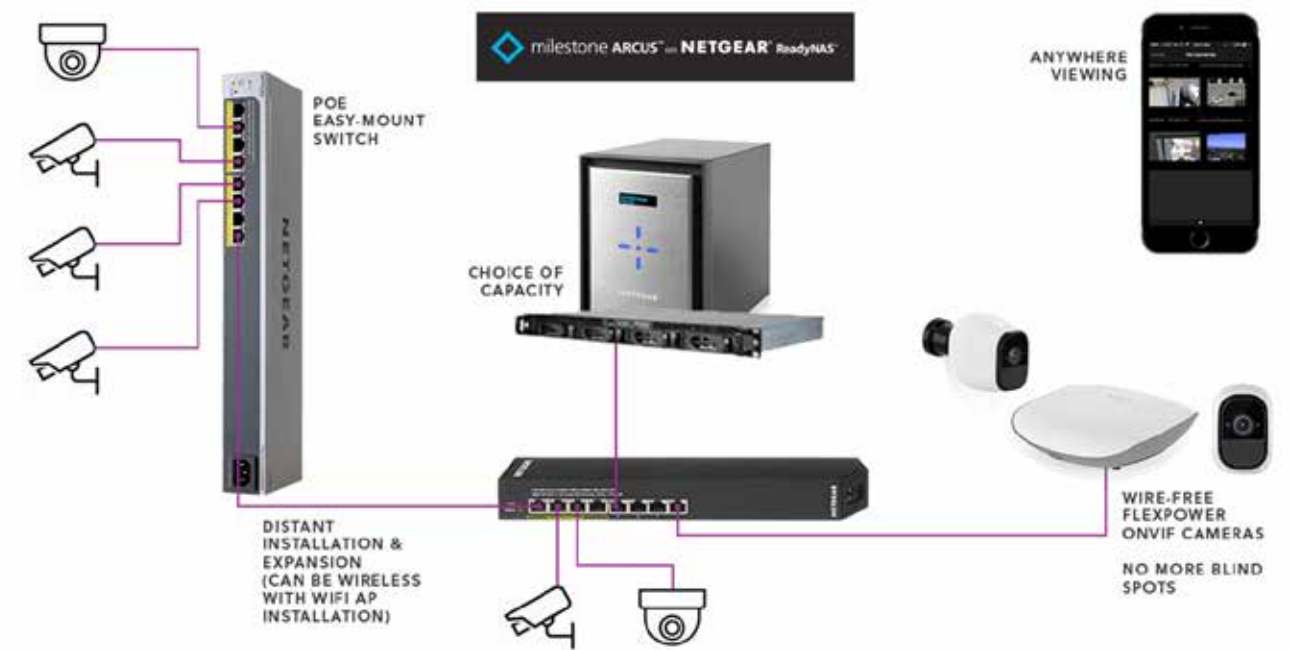

System Requirements for the Solution

MILESTONE ARCUS ON NETGEAR READYNAS

- A Business-class ReadyNAS (420, 520, 620, 2000, 3000, 4000 series)
- ReadyNAS OS 6.8 or later
- Free download-able Milestone Arcus on ReadyNAS app from ReadyNAS app store (Admin UI)
- Camera licenses purchased separately
 - RNVMSMA1-10000S, Milestone Arcus on ReadyNAS, 1 camera license
 - RNVMSMA4-10000S, Milestone Arcus on ReadyNAS, 4 camera licenses
 - RNVMSMA8-10000S, Milestone Arcus on ReadyNAS, 8 camera licenses
- 60 day free trial for two cameras

NETGEAR FLEXPPOWER

- VNB4000 (FlexPower Base Station)
- VNC4030 (FlexPower Wire Free Camera)

ReadyNAS

Desktop



	ReadyNAS 212	ReadyNAS 214	ReadyNAS 422	ReadyNAS 424
Product Description	2-Bay Desktop	4-Bay Desktop	2-Bay Desktop	4-Bay Desktop
Internal Capacity	20TB	40TB	20TB	40TB
File Protocols	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV
Block Protocols	iSCSI	iSCSI	iSCSI	iSCSI
File System	BTRFS	BTRFS	BTRFS	BTRFS
Supported Drive Types	Desktop SATA	Desktop	Desktop/Enterprise SATA	Desktop/Enterprise SATA
Gigabit Ethernet Ports	2	2	2	2
10G Ethernet Port	0	0	0	0
Supports EDA500 Expansion Chassis	No	No		
Reliability Features	Hot Swappable Disks Network Failover	Hot Swappable Disks Network Failover	Hot Swappable Disks Network Failover	Hot Swappable Disks Network Failover
CPU	Marvell Annapurna AL212 Quad Core 1.4GHz High Performance ARM Cortex A15	Marvell Annapurna AL212 Quad Core 1.4GHz High Performance ARM Cortex A15	Intel Atom C3338 Dual Core	Intel Atom C3338 Dual Core
Memory	2GB	2GB	2GB DDR4	2GB DDR4
RAID Level Supported	RAID 0,1	RAID 0,1,5,6,10	RAID 0,1	RAID 0,1,5,6,10
Auto Volume Expansion	XRAID2	XRAID2	XRAID2	XRAID2
Unique Features	<ul style="list-style-type: none"> Most versatile and secure remote access: <ul style="list-style-type: none"> ReadyCLOUD Collaboration, Sync & Backup ReadyCLOUD automated VPN 5-levels of data protection <ul style="list-style-type: none"> XRAID and/or Flex-RAID (model dependent) Protection of data with performance-neutral snapshots Protection against silent data corruption ("Bitrot") Real-time anti-virus Integrated, web-managed replication to the cloud ReadyDR – Disaster Recovery Solution <ul style="list-style-type: none"> Incremental backup to another ReadyNAS Easy recovery of full data set 	<ul style="list-style-type: none"> Most versatile and secure remote access: <ul style="list-style-type: none"> ReadyCLOUD Collaboration, Sync & Backup ReadyCLOUD automated VPN 5-levels of data protection <ul style="list-style-type: none"> XRAID and/or Flex-RAID (model dependent) Protection of data with performance-neutral snapshots Protection against silent data corruption ("Bitrot") Real-time anti-virus Integrated, web-managed replication to the cloud ReadyDR – Disaster Recovery Solution <ul style="list-style-type: none"> Incremental backup to another ReadyNAS Easy recovery of full data set 	<ul style="list-style-type: none"> Most versatile and secure remote access: <ul style="list-style-type: none"> ReadyCLOUD Collaboration, Sync & Backup ReadyCLOUD automated VPN 5-levels of data protection <ul style="list-style-type: none"> XRAID and/or Flex-RAID (model dependent) Protection of data with performance-neutral snapshots Protection against silent data corruption ("Bitrot") Real-time anti-virus Integrated, web-managed replication to the cloud ReadyDR – Disaster Recovery Solution <ul style="list-style-type: none"> Incremental backup to another ReadyNAS Easy recovery of full data set 	<ul style="list-style-type: none"> Most versatile and secure remote access: <ul style="list-style-type: none"> ReadyCLOUD Collaboration, Sync & Backup ReadyCLOUD automated VPN 5-levels of data protection <ul style="list-style-type: none"> XRAID and/or Flex-RAID (model dependent) Protection of data with performance-neutral snapshots Protection against silent data corruption ("Bitrot") Real-time anti-virus Integrated, web-managed replication to the cloud ReadyDR – Disaster Recovery Solution <ul style="list-style-type: none"> Incremental backup to another ReadyNAS Easy recovery of full data set
Onboard Backup Options	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine
VMware Ready	No	No	Yes	Yes
ReadyDR for Disaster Recovery	No	No	Yes	Yes
Warranty (System)	3 year standard warranty	3 year standard warranty	5 year standard warranty	5 year standard warranty
Optimal Number of User Support	1 – 20	1~20	1~40	1~40
System SKUs	RN21200 RN21221D RN2122D	RN21400 RN2121D RN21442D	RN42200 RN422D2 RN424D4 RN422D6 RN422E4 RN422E6	RN42400 RN424D2 RN424D4 RN424D6 RN424E4 RN424E6
ProSUPPORT Maintenance PKGS				
OnCall 24x7 1-year	PMB0312	PMB0312	PMB0312	PMB0312
OnCall 24x7 3-year	PMB0332	PMB0332	PMB0332	PMB0332
OnCall 24x7 5-year	PMB0352	PMB0352	PMB0352	PMB0352

ReadyNAS

Desktop



	ReadyNAS 426	ReadyNAS 428	ReadyNAS 524X	ReadyNAS 526X
Product Description	6-Bay Desktop	8-Bay Desktop	8-Bay Desktop	6-Bay Desktop
Internal Capacity	60 TB	80 TB	40TB	60TB
File Protocols	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV
Block Protocols	iSCSI	iSCSI	iSCSI	iSCSI
File System	BTRFS	BTRFS	BTRFS	BTRFS
Supported Drive Types	Desktop/Enterprise SATA	Desktop/Enterprise SATA	Desktop/Enterprise SATA	Desktop/Enterprise SATA
Gigabit Ethernet Ports	2	2	0	0
10G Ethernet Port	0	0	2	2 (10GBaseT)
Supports EDA500 Expansion Chassis			Yes. Not Recommended for High Performance Applications	Yes. Not Recommended for High Performance Applications
Reliability Features	Hot Swappable Disks Network Failover	Hot Swappable Disks Network Failover	Hot Swappable Disks Network Failover ECC Memory	Hot Swappable Disks Network Failover ECC Memory
CPU	Intel Atom C3538 Dual Core	Intel Atom C3538 Dual Core	Intel Server Processor D-1508 Dual Core 2.2GHz	Intel Server Processor D-1508 Dual Core 2.2GHz
Memory	4GB DDR4	4GB DDR4	4GB DDR4 with ECC	4GB DDR4 with ECC
RAID Level Supported	RAID 0,1,5,6,10, 50, 60	RAID 0,1,5,6,10, 50, 60	RAID 0,1,5,6,10	RAID 0,1,5,6,10, 50, 60
Auto Volume Expansion	X-RAID2	X-RAID2	XRAID2	XRAID2
Unique Features	<ul style="list-style-type: none"> Most versatile and secure remote access: <ul style="list-style-type: none"> ReadyCLOUD Collaboration, Sync & Backup ReadyCLOUD automated VPN 5 Levels of data protection: <ul style="list-style-type: none"> XRAID Hourly protection of data with performance-neutral snapshots Real-Time Antivirus Protection against silent data corruption ("Bitrot") Integrated, web-managed replication for disaster recovery or ReadyNAS Vault / backup to the cloud ReadyDR – Disaster Recovery Solution <ul style="list-style-type: none"> Incremental backup to another ReadyNAS Easy recovery of full data set 	<ul style="list-style-type: none"> Most versatile and secure remote access: <ul style="list-style-type: none"> ReadyCLOUD Collaboration, Sync & Backup ReadyCLOUD automated VPN 5 Levels of data protection: <ul style="list-style-type: none"> XRAID Hourly protection of data with performance-neutral snapshots Real-Time Antivirus Protection against silent data corruption ("Bitrot") Integrated, web-managed replication for disaster recovery or ReadyNAS Vault / backup to the cloud ReadyDR – Disaster Recovery Solution <ul style="list-style-type: none"> Incremental backup to another ReadyNAS Easy recovery of full data set 	<ul style="list-style-type: none"> Most versatile and secure remote access: <ul style="list-style-type: none"> ReadyCLOUD Collaboration, Sync & Backup ReadyCLOUD automated VPN 5-levels of data protection <ul style="list-style-type: none"> XRAID and/or Flex-RAID (model dependent) Protection of data with performance-neutral snapshots Protection against silent data corruption ("Bitrot") Real-time anti-virus Integrated, web-managed replication to the cloud ReadyDR – Disaster Recovery Solution <ul style="list-style-type: none"> Incremental backup to another ReadyNAS Easy recovery of full data set 	<ul style="list-style-type: none"> Most versatile and secure remote access: <ul style="list-style-type: none"> ReadyCLOUD Collaboration, Sync & Backup ReadyCLOUD automated VPN ReadyNAS Backup 5-levels of data protection <ul style="list-style-type: none"> XRAID and/or Flex-RAID (model dependent) Protection of data with performance-neutral snapshots Protection against silent data corruption ("Bitrot") Real-time anti-virus Integrated, web-managed replication to the cloud ReadyDR – Disaster Recovery Solution <ul style="list-style-type: none"> Incremental backup to another ReadyNAS Easy recovery of full data set
Onboard Backup Options	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine
VMware Ready	Yes	Yes	Yes	Yes
ReadyDR for Disaster Recovery	Yes	Yes	Yes	Yes
Warranty (System)	5 year standard warranty	5 year standard warranty	5 year standard warranty	5 year standard warranty
Optimal Number of User Support	1~40	1~40	20-80	20-80
System SKUs	RN42600 RN426D2 RN426D4 RN426D6 RN426E4 RN426E6	RN42800 RN428E4 RN428E6	RN524X00 RN524XD2 RN524XD4 RN524XD6 RN524XE3 RN524XE4 RN524XE6	RN526X00 RN526XD3 RN526XD4 RN526XD6 RN526XE3 RN526XE4 RN526XE6
ProSUPPORT Maintenance PKGS				
OnCall 24x7 1-year	PMB0313	PMB0313	PMB0313	PMB0313
OnCall 24x7 3-year	PMB0333	PMB0333	PMB0333	PMB0333
OnCall 24x7 5-year	PMB0353	PMB0353	PMB0353	PMB0353

*RAID 50 and RAID 60 are available with OS6.7 and above

ReadyNAS

Desktop



	ReadyNAS 528X	ReadyNAS 626X	ReadyNAS 628X
Product Description	8-Bay Desktop	6-Bay Desktop	8-Bay Desktop
Internal Capacity	80TB	60TB	80TB
File Protocols	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV
Block Protocols	iSCSI	iSCSI	iSCSI
File System	BTRFS	BTRFS	BTRFS
Supported Drive Types	Desktop/Enterprise SATA	Desktop/Enterprise SATA	Desktop/Enterprise SATA
Gigabit Ethernet Ports	0	2	2
10G Ethernet Port	2	2	2
Supports EDA500 Expansion Chassis	Yes. Not Recommended for High Performance Applications	Yes. Not Recommended for High Performance Applications	Yes. Not Recommended for High Performance Applications
Reliability Features	Hot Swappable Disks Network Failover ECC Memory	Hot Swappable Disks Network Failover ECC Memory	Hot Swappable Disks Network Failover ECC Memory
CPU	Intel Server Processor D-1508 Dual Core 2.2GHz	Intel Xeon Server Processor D-1521 Quad Core 2.4GHz	Intel Xeon Server Processor D-1521 Quad Core 2.4GHz
Memory	4GB DDR4 with ECC	8GByte DDR4 with ECC	8GByte DDR4 with ECC
RAID Level Supported	RAID 0,1,5,6,10, 50, 61	RAID 0,1,5,6,10, 50, 60	RAID 0,1,5,6,10, 50, 60
Auto Volume Expansion	XRAID2	XRAID2	XRAID2
Unique Features	<p>Most versatile and secure remote access:</p> <ul style="list-style-type: none"> - ReadyCLOUD Collaboration, Sync & Backup - ReadyCLOUD automated VPN - ReadyNAS Backup <p>5-levels of data protection</p> <ul style="list-style-type: none"> - XRAID and/or Flex-RAID (model dependent) - Protection of data with performance-neutral snapshots - Protection against silent data corruption ("Bitrot") - Real-time anti-virus - Integrated, web-managed replication to the cloud <p>ReadyDR – Disaster Recovery Solution</p> <ul style="list-style-type: none"> - Incremental backup to another ReadyNAS - Easy recovery of full data set 	<p>Most versatile and secure remote access:</p> <ul style="list-style-type: none"> - ReadyCLOUD Collaboration, Sync & Backup - ReadyCLOUD automated VPN - ReadyNAS Backup <p>5-levels of data protection</p> <ul style="list-style-type: none"> - XRAID and/or Flex-RAID (model dependent) - Protection of data with performance-neutral snapshots - Protection against silent data corruption ("Bitrot") - Real-time anti-virus - Integrated, web-managed replication to the cloud <p>ReadyDR – Disaster Recovery Solution</p> <ul style="list-style-type: none"> - Incremental backup to another ReadyNAS - Easy recovery of full data set 	<p>Most versatile and secure remote access:</p> <ul style="list-style-type: none"> - ReadyCLOUD Collaboration, Sync & Backup - ReadyCLOUD automated VPN - ReadyNAS Backup <p>5-levels of data protection</p> <ul style="list-style-type: none"> - XRAID and/or Flex-RAID (model dependent) - Protection of data with performance-neutral snapshots - Protection against silent data corruption ("Bitrot") - Real-time anti-virus - Integrated, web-managed replication to the cloud <p>ReadyDR – Disaster Recovery Solution</p> <ul style="list-style-type: none"> - Incremental backup to another ReadyNAS - Easy recovery of full data set
Onboard Backup Options	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine
VMware Ready	Yes	Yes	Yes
ReadyDR for Disaster Recovery	Yes	Yes	Yes
Warranty (System)	5 year standard warranty	5 year standard warranty	5 year standard warranty
Optimal Number of User Support	20-80	40-120	40-120
System SKUs	RN528X00 RN528XE3 RN528XE4 RN528XE6	RN626X00 RN626XE3 RN626XE4 RN626XE6	RN628X00 RN628XE3 RN628XE4 RN628XE6
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0313 PMB0333 PMB0353	PMB0313 PMB0333 PMB0353

*RAID 50 and RAID 60 are available with OS6.7 and above

ReadyNAS

Rackmount



	ReadyNAS 2304	ReadyNAS 2312	ReadyNAS 3138	ReadyNAS 3312
Product Description	1U Rackmount, 4-Bays	1U Rackmount, 12-Bays	1U Rackmount, 4-Bays	2U Rackmount, 12-Bays
Total Solution Capacity Internal/with Expansion	40TB / N.A.	120TB/N.A.	40TB/N.A.	120TB/600TB
File Protocols	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV	NFS, CIFS/SMB, AFP, HTTP(S), FTP(S), WebDAV
Block Protocols	iSCSI	iSCSI	iSCSI	iSCSI
File System	BTRFS	BTRFS	BTRFS	BTRFS
Supported HDD Types	Desktop/Enterprise SATA	Desktop/Enterprise SATA	Desktop/Enterprise SATA	Enterprise SATA
Gigabit Ethernet Ports	2	4	4	4
10G Ethernet Port	0	0	0	0
Reliability Features	Hot Swappable Disks Network Failover	Hot Swappable Disks Network Failover	Hot Swappable Disks Network Failover	Hot Swappable Disks Network Failover
CPU	Intel Celeron dual core 2.0GHz processor	Intel Atom Quad Core C3538 2.1GHz with QuickAssist	Intel Atom C2558 Dual Core 2.4GHz Quad Core Processor	Intel Xeon E3-1225v5 3.3GHz Quad Core
Memory	2GB DDR3	2GB DDR4	4GB DDR3 ECC	8GB DDR4 ECC
Expandable Memory	0	No	0	64GByte DDR4
RAID Level Supported	RAID 0,1,5,6,11	RAID 0,1,5,6,10,50,60	RAID 0,1,5,6,10	RAID 0,1,5,6,10,50,60*
Auto Volume Expansion	XRAID3	XRAID2	XRAID2	XRAID2
Unique Features	<p>5 Levels of data protection:</p> <ul style="list-style-type: none"> - XRAID - Hourly protection of data with performance-neutral snapshots - Protection against silent data corruption ("Bitrot") - Real-time anti-virus - Integrated, web-managed replication for disaster recovery and backup to the cloud <p>ReadyDR for disaster recovery</p> <p>Most versatile and secure remote access:</p> <ul style="list-style-type: none"> - ReadyCLOUD Collaboration, Sync & Backup - ReadyCLOUD automated VPN <p>Performance Storage for backup</p>	<p>5 Levels of data protection:</p> <ul style="list-style-type: none"> - XRAID - Hourly protection of data with performance-neutral snapshots - Protection against silent data corruption ("Bitrot") - Real-time anti-virus - Integrated, web-managed replication for disaster recovery and backup to the cloud <p>ReadyDR for disaster recovery</p> <p>Most versatile and secure remote access:</p> <ul style="list-style-type: none"> - ReadyCLOUD Collaboration, Sync & Backup - ReadyCLOUD automated VPN <p>Performance Storage for backup</p>	<p>5-levels of data protection</p> <ul style="list-style-type: none"> - XRAID and/or Flex-RAID (model dependent) - Protection of data with performance-neutral snapshots - Protection against silent data corruption ("Bitrot") - Real-time anti-virus - Integrated, web-managed replication to the cloud <p>ReadyDR for disaster recovery</p> <p>Most versatile and secure remote access:</p> <ul style="list-style-type: none"> - ReadyCLOUD Collaboration, Sync & Backup - ReadyCLOUD automated VPN <p>High performance Storage for backup Collaboration for work group</p>	<p>5-levels of data protection</p> <ul style="list-style-type: none"> - XRAID and/or Flex-RAID (model dependent) - Protection of data with performance-neutral snapshots - Protection against silent data corruption ("Bitrot") - Real-time anti-virus - Integrated, web-managed replication to the cloud <p>ReadyDR for disaster recovery</p> <p>Most versatile and secure remote access:</p> <ul style="list-style-type: none"> - ReadyCLOUD Collaboration, Sync & Backup - ReadyCLOUD automated VPN <p>Superior performance Large internal capacity Optional Highspeed SAS for expansion chassis Storage for backup Collaboration for work group</p>
Onboard Backup Options	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine	ReadyCLOUD user directory backup Remote & Local Time Machine
VMware Ready	Yes	Yes	Yes	Yes
Warranty (System)	5 year warranty with NBD HW replacement	5 year warranty with NBD HW replacement	5 year warranty with NBD HW replacement	5 year warranty with NBD HW replacement
Optimal Number of User Support	1-30	40-80 Users	1-40	20-120
System SKUs	RR230400 RR2304E4 RR2304E6	RR2312 RR2312G4 RR2312G6 RR2312H8 RR231200	RN3138 RN31842D RN31842E RN31843D RN31843E RN31844E RN31342E	RR331200 RR3312G2 RR3312G3 RR3312G4 RR3312G6
Support for: EDA 4000 – 24-Bay/EDA 2000 – 12-Bay Expansion	No	No	No	Yes
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312 PMB0332 PMB0352	PMB0313 PMB0333 PMB0352	PMB0314 PMB0334 PMB0354

*RAID 50 and RAID 60 are available with OS6.7 and above


Midmarket Solutions

Virtualization

Gartner reports that midmarket adoption for virtualization is growing even faster than expected. Smart virtualization projects can make applications more reliable, leverage existing networks and don't have to cost a fortune.

NETGEAR products can help you build solutions like:

- Primary shared storage platforms in small or remote offices
- Secondary storage for backup and replication in existing virtualization environments
- 10-Gigabit connectivity with managed or smart switches, stacked for reliability
- Securing physical and virtual machines from network threats
- Next Business Day Service and extended warranties covering all infrastructure components

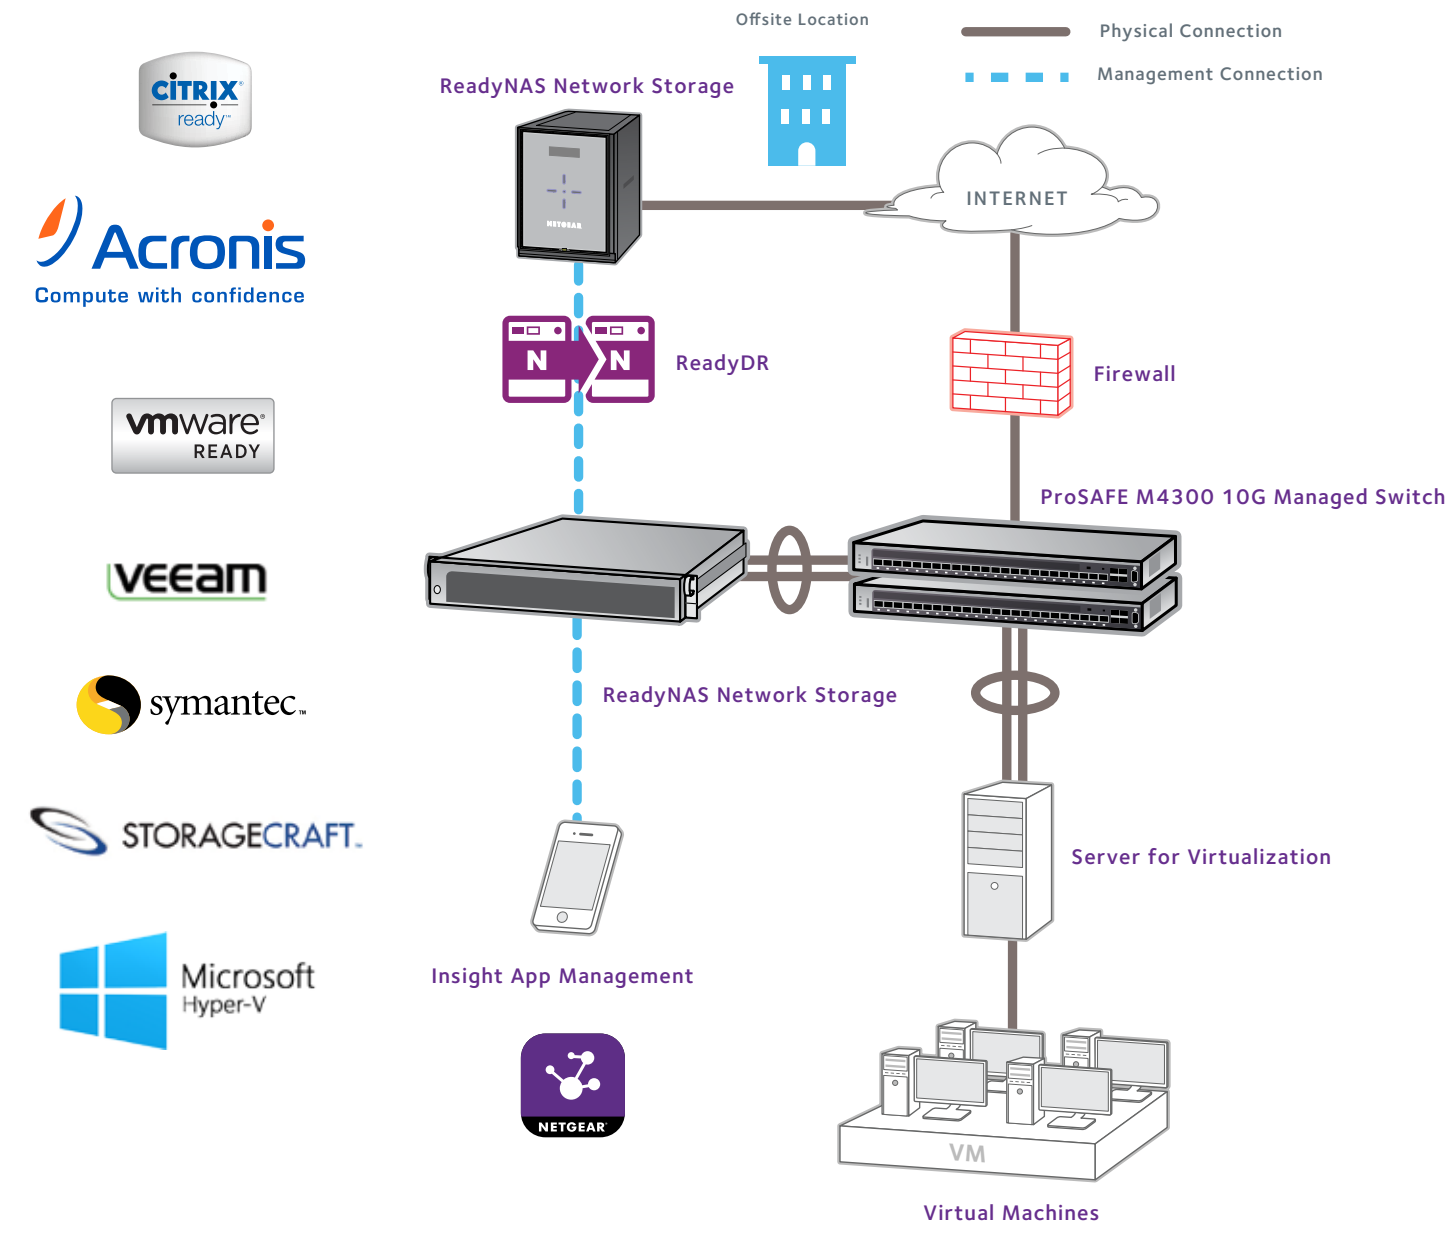

LTE MOBILE

LTE MOBILE DEVICES FOR INSTANT CONNECTIVITY ANYWHERE



100% WIRE-FREE SECURITY SOLUTIONS

- Weather resistant
- Free cloud recording
- Instant alerts of activity



GIGABIT CLASS IN MOBILE BROADBAND

- Media streaming
- Data offloading
- Connect up to 20 devices



RELIABLE INTERNET ON-THE-GO

- Secure internet connection
- Long-lasting battery
- Connect multiple devices



ALWAYS-ON BROADBAND CONNECTION

- Fail-safe connectivity solutions
- Ideal for remote locations
- Easy Installation

SECURITY AND CONNECTIVITY FOR YOUR BUSINESS



Mobile HD Security Cameras

The Arlo Go Mobile Security Cameras are ideal for security monitoring when in areas with limited or no WiFi access. Arlo Go works wherever there is 3G/4G LTE wireless connections. Arlo Go makes it easy and affordable to keep your business secured around the clock, no matter where you are.

- Boats, docks and marinas
- Property management, airbnb and vacation home monitoring
- Farms, ranches and stables
- Warehouses, ports and parking lots
- Construction sites and workplace security
- Automobile dealerships and inventory lots



Mobile Routers

Nighthawk® Mobile Routers deliver gigabit 4G LTE speeds, enabling mobile businesses to efficiently operating anywhere, regardless of whether it is at a temporary or permanent location.

- Activate instant Internet connectivity for any WiFi device in temporary or mobile stores
- Utilize waiting time efficiently while in-transit
- Download or upload information for file sharing or collaboration
- Maintain data security and employee usage accountability, avoiding the risk of using unprotected public WiFi



Hotspots

NETGEAR Mobile Hotspots are secure and easy to use, making them the ideal work companions that let you connect multiple WiFi devices to the Internet anywhere mobile coverage is available. NETGEAR AirCard mobile hotspots let you be productive anywhere you need to be.

- 2930mAh battery that lasts up to 11 hours of continuous use
- Block unwanted devices or turn on a secure Guest Wi-Fi to safely share Internet access for temporary use among your teams, clients or guests
- Get instant Wi-Fi connection where you want, when you want



LTE Modems

The NETGEAR 4G LTE Modems provide instant 4G LTE connectivity for all your devices and equipment in temporary worksites, or can act as a backup to your primary broadband network for avoiding service disruptions when your fixed wireline connection goes down.

- LTE connectivity for business' needs
- Interim solution to fixed line service
- Last-mile connection
- Retail locations with payment processing
- Premise security & monitoring
- Temporary offices such as construction sites
- Enterprise server room



SUPPORT

ProSUPPORT for Business

COMPREHENSIVE SUPPORT PLANS FOR MAXIMUM NETWORK UPTIME AND BUSINESS PEACE OF MIND

- 24/7 live technical support and consultation
- Direct, scheduled access to product experts to help in configuration
- Extended HW/SW Warranty coverage with NBD parts replacement

More Than Just Support — A Business Partnership

The NETGEAR ProSUPPORT for Business offerings provide you with peace of mind by extending and enhancing the standard warranty or support coverage included with your product purchase. With ProSUPPORT, you get 24/7 direct access to NETGEAR technical support engineers who can rapidly resolve technical issues both big and small. Connect with the people that have built your products and build the relationship that will contribute to your business success.

OnCall 24x7 Tech Support

NETGEAR extends your initial 90-day technical support with the OnCall 24x7 Tech Support package. OnCall 24x7 services are conducted by phone, chat and email, to solve any of your technical challenges. In addition, NETGEAR will proactively send you alerts about any newly released firmware updates to make sure that you are able to plan in advance, download and upgrade at your earliest convenience.

Professional Configuration and Setup Assistance

Schedule an appointment for a live consultation by an expert to configure, set up or re-configure your device. This allows you the quickest time to deployment, optimizes accuracy in product deployment, minimizes downtime and maximizes the performance of the device.

Extended Warranty with Next Business Day Replacement

Once your warranty expires, ProSUPPORT for Business provides you with an extended warranty ensuring that if you have any issues with your device, it will be replaced by the same (or a newer) device. Next Business Day product replacement is also included to ensure that your business is back up and running in the shortest time.

	Zero Cost			Premium	
	Warranty Hardware & Software	90-day FREE Technical Support	Lifetime ProSAFE Online Technical Support	ProSUPPORT OnCall 24x7 Technical Support	ProSUPPORT Extended Hardware Warranty
Products Covered	ALL NETGEAR Business Products	ALL NETGEAR Business Products	Select NETGEAR Business Switches	<ul style="list-style-type: none"> • All NETGEAR Business Products • Paid Support Package Varies by Products 	Select NETGEAR Business Products
Hardware Replacement	YES Next Business Day	N/A	N/A	N/A	YES Next Business Day
Software Feature Updates	YES	YES	YES	YES	YES
Support by Email	N/A	YES	YES	YES	N/A
Support by Chat	N/A	YES	YES	YES	N/A
Support by Phone	N/A	YES	N/A	YES	N/A

NETGEAR ProSUPPORT

ProSUPPORT SKU

Services	ProSUPPORT Category	ProSUPPORT Part Number	Contract
OnCall 24x7	ProSUPPORT Category S1	PMB0S11-10000S	1 yr
		PMB0S31-10000S	3 yr
		PMB0S51-10000S	5 yr
	ProSUPPORT Category S2	PMB0S12-10000S	1 yr
		PMB0S32-10000S	3 yr
		PMB0S52-20000S	5 yr
	ProSUPPORT Category 1	PMB0311-10000S	1 yr
		PMB0331-10000S	3 yr
		PMB0351-10000S	5 yr
	ProSUPPORT Category 2	PMB0312-10000S	1 yr
		PMB0332-10000S	3 yr
		PMB0352-10000S	5 yr
ProSUPPORT Category 3	PMB0313-10000S	1 yr	
	PMB0333-10000S	3 yr	
	PMB0353-10000S	5 yr	
ProSUPPORT Category 4	PMB0314-10000S	1 yr	
	PMB0334-10000S	3 yr	
	PMB0354-10000S	5 yr	
Professional Setup and Configuration (Remote)	2-hour consultation, 48-hour advance appointment	PSB0304-10000S	

Availability by Product

Category	Product Family	Hardware Warranty	90-Day Free Support	Lifetime Online Tech Support	ProSUPPORT Category
Insight Managed Smart Cloud Switches	GC110	5 Yr	Y	N	Category S2
	GC110P	5 Yr	Y	N	Category S2
	GC510P	5 Yr	Y	N	Category S2
	GC510PP	5 Yr	Y	N	Category S2
	GC728X	5 Yr	Y	N	Category 1
	GC728XP	5 Yr	Y	N	Category 1
Fully Managed Switches	GSM7224	Lifetime	Y	Y	Category 2
	GSM7248	Lifetime	Y	Y	Category 3
	GSM7328FS	Lifetime	Y	Y	Category 3
	GSM5212	Lifetime	Y	Y	Category 2
	GSM7226LP	Lifetime	Y	Y	Category 2
	GSM7248P	Lifetime	Y	Y	Category 3
	GSM7212F	Lifetime	Y	Y	Category 2
	GSM7224P	Lifetime	Y	Y	Category 2
	GSM4210P	Lifetime	Y	Y	Category 2
	XSM4316S	Lifetime	Y	Y	Category 3
	XSM4324S	Lifetime	Y	Y	Category 4
	XSM4324CS	Lifetime	Y	Y	Category 4
	XSM4348S	Lifetime	Y	Y	Category 4
	XSM4348CS	Lifetime	Y	Y	Category 4
	XSM4396K0	Lifetime	Y	Y	Category 4
	XSM4396K1	Lifetime	Y	Y	Category 4

NETGEAR ProSUPPORT

Availability by Product (continued)

Category	Product Family	Hardware Warranty	90-Day Free Support	Lifetime Online Tech Support	ProSUPPORT Category
Fully Managed Switches	GSM4328S	Lifetime	Y	Y	Category 3
	GSM4328PA	Lifetime	Y	Y	Category 3
	GSM4328PB	Lifetime	Y	Y	Category 3
	GSM4352S	Lifetime	Y	Y	Category 3
	GSM4352PA	Lifetime	Y	Y	Category 3
Fully Managed Switches, Chassis	GSM4352PB	Lifetime	Y	Y	Category 3
	XCM8903SK	Lifetime	Y	Y	Category 4
	XCM8903SF	Lifetime	Y	Y	Category 4
Stackable Smart Managed Pro Switch Bundles	XCM8903SX	Lifetime	Y	Y	Category 4
	GS752TSB	Lifetime	Y	Y	Category 2
	GS752TPSB	Lifetime	Y	Y	Category 2
Stackable Smart Managed Pro Switches	GS728TX	Lifetime	Y	Y	Category 2
	GS728TXP	Lifetime	Y	Y	Category 2
	GS752TX	Lifetime	Y	Y	Category 2
	GS752TXP	Lifetime	Y	Y	Category 2
	GS752TXS	Lifetime	Y	Y	Category 2
Smart Managed Pro Switches	MS510TXPP	Lifetime	Y	Y	Category 2
	MS510TX	Lifetime	Y	Y	Category 2
	FS728TLP	Lifetime	Y	N	Category 1
	FS728TP	Lifetime	Y	N	Category 1
	GS108T	Lifetime	Y	Y	Category S1
	GS110TP	Lifetime	Y	Y	Category S2
	GS418TPP	Lifetime	Y	Y	Category 1
	GS510TP	Lifetime	Y	Y	Category 1
	GS510TLP	Lifetime	Y	Y	Category S2
	GS510TPP	Lifetime	Y	Y	Category S2
	MS510TX	Lifetime	Y	Y	Category S2
	MS510TXPP	Lifetime	Y	Y	Category S2
	GS516TP	Lifetime	Y	Y	Category 1
	GS716T	Lifetime	Y	Y	Category S2
	GS724T	Lifetime	Y	Y	Category 1
	GS724TP	Lifetime	Y	Y	Category 1
GS728TP	Lifetime	Y	Y	Category 1	
GS728TPP	Lifetime	Y	Y	Category 1	
GS748T	Lifetime	Y	Y	Category 1	
GS752TP	Lifetime	Y	Y	Category 2	
GS752TPP	Lifetime	Y	Y	Category 2	
XS708T	Lifetime	Y	Y	Category 1	
XS712T	Lifetime	Y	Y	Category 2	
XS716T	Lifetime	Y	Y	Category 2	
XS728T	Lifetime	Y	Y	Category 3	
XS748T	Lifetime	Y	Y	Category 4	
GS105E	Lifetime	Y	Y	Category S1	
GS105PE	Lifetime	Y	Y	Category S1	
GS108E	Lifetime	Y	Y	Category S1	

NETGEAR ProSUPPORT

Availability by Product (continued)

Category	Product Family	Hardware Warranty	90-Day Free Support	Lifetime Online Tech Support	ProSUPPORT Category	
Smart Managed Plus Switches	GS105E	Lifetime	Y	Y	Category S1	
	GS105PE	Lifetime	Y	Y	Category S1	
	GS108E	Lifetime	Y	Y	Category S1	
	GS108PE	Lifetime	Y	Y	Category S1	
	GS116E	Lifetime	Y	Y	Category S2	
	GS750E	Lifetime	Y	Y	Category 1	
	GS908E	3 Yr	Y	N	Category S1	
	JGS516PE	Lifetime	Y	Y	Category S2	
	JGS524E	Lifetime	Y	Y	Category S2	
	JGS524PE	Lifetime	Y	Y	Category S2	
	XS512EM	Lifetime	Y	Y	Category 2	
	XS724EM	Lifetime	Y	Y	Category 2	
	GS110EMX	Lifetime	Y	Y	Category S2	
	XS708E	Lifetime	Y	Y	Category 1	
	XS716E	Lifetime	Y	Y	Category 2	
Smart Managed Plus Click Switches	GSS108E	Lifetime	Y	Y	Category S1	
	GSS108EPP	Lifetime	Y	Y	Category S2	
	GSS116E	Lifetime	Y	Y	Category S2	
Easy-Mount Smart Managed Plus Switches	GS408EPP	Lifetime	Y	Y	Category S2	
	Unmanaged Switch					
Unmanaged Switch	GS110MX	Lifetime	Y	Y	Category S2	
	FS105	Lifetime	Y	Y	Category S1	
	FS108	Lifetime	Y	Y	Category S1	
	FS108P	Lifetime	Y	Y	Category S1	
	FS116	Lifetime	Y	Y	Category S1	
	F116P	Lifetime	Y	Y	Category S1	
	JFS524	Lifetime	Y	Y	Category S2	
	GS105NA	Lifetime	Y	Y	Category S1	
	GS108	Lifetime	Y	Y	Category S1	
	GS116NA	Lifetime	Y	Y	Category S2	
	GS305	3 Yr	Y	N	Category S1	
	GS305P	3 Yr	Y	N	Category S1	
	GS308	3 Yr	Y	N	Category S1	
	GS308P	3 Yr	Y	N	Category S1	
	GS316	3 Yr	Y	N	Category S2	
	GS324	3 Yr	Y	N	Category S2	
	GS348	3 Yr	Y	N	Category S2	
	GS108PP	Lifetime	Y	Y	Category S2	
	GS908	3 Yr	Y	N	Category S1	
	JGS516NA	Lifetime	Y	Y	Category S2	
	JGS524NA	Lifetime	Y	Y	Category S2	
	XS505M	Lifetime	Y	Y	Category 1	
	XS508M	Lifetime	Y	Y	Category 1	
	Nighthawk Pro Gaming Advanced Ethernet Switches	GS810EMX	3 Yr	Y	N	Category 1
		GS808E	3 Yr	Y	N	Category S2
	ReadyNAS Desktop	RN212	3 Yr	Y	N	Category 2
		RN214	3 Yr	Y	N	Category 2
RN312		5 Yr	Y	N	Category 2	
RN314		5 Yr	Y	N	Category 2	
RN316		5 Yr	Y	N	Category 2	
RN422		5 Yr	Y	N	Category 2	

NETGEAR ProSUPPORT

Availability by Product (continued)

Category	Product Family	Hardware Warranty	90-Day Free Support	Lifetime Online Tech Support	ProSUPPORT Category	
ReadyNAS Desktop	RN424	5 Yr	Y	N	Category 2	
	RN426	5 Yr	Y	N	Category 3	
	RN428	5 Yr	Y	N	Category 3	
	RN524X	5 Yr	Y	N	Category 3	
	RN526X	5 Yr	Y	N	Category 3	
	RN528X	5 Yr	Y	N	Category 3	
	RN626X	5 Yr	Y	N	Category 3	
	RN628X	5 Yr	Y	N	Category 3	
	ReadyNAS Rackmount	RR2304	5 Yr	Y	N	Category 2
		RR2312	5 Yr	Y	N	Category 3
RN3138		5 Yr	Y	N	Category 3	
RR3312		5 Yr	Y	N	Category 4	
RR4312X		5 Yr	Y	N	Category 4	
RR4360X		5 Yr	Y	N	Category 4	
ReadyNAS Expansion Chassis	EDA4000	5 Yr	N	N	Category 4	
WiFi Systems - ORBI	SRK60	5 Yr	Y	Y	Category 1	
	SRS60	5 Yr	Y	Y	Category 1	
	RBS50Y	5 Yr	Y	Y	Category S2	
Wireless 802.11ac Access Points	WAC120	3 Yr	Y	N	Category S1	
	WAC104	3 Yr	Y	N	Category S1	
	WAC740	Lifetime	Y	Y	Category 1	
	WAC730	Lifetime	Y	Y	Category 1	
	WAC720	Lifetime	Y	Y	Category 1	
	WAC505	5 Yr	Y	N	Category S1	
	WAC510	5 Yr	Y	N	Category S2	
	Wireless Access Points	WNAP210	Lifetime	Y	Y	Category S2
		WN370	Lifetime	Y	Y	Category 1
		WNAP320	Lifetime	Y	Y	Category 1
WNDAP330		Lifetime	Y	Y	Category 1	
WNDAP350		Lifetime	Y	Y	Category 1	
WNDAP360		Lifetime	Y	Y	Category 1	
WNDAP620		Lifetime	Y	Y	Category 1	
WNDAP660		Lifetime	Y	Y	Category 1	
WNSKT350		Lifetime	Y	Y	Category 1	
WND930		Lifetime	Y	Y	Category 1	
Wireless Management Systems	WC7500	Lifetime	Y	Y	Category 1	
	WC7520SKT	Lifetime	Y	Y	Category 1	
	WC7600	Lifetime	Y	Y	Category 3	
	WC9500	Lifetime	Y	Y	Category 4	
ProSAFE® VPN Firewall	FVS318N	Lifetime	Y	Y	Category 1	
	FVS318NA	Lifetime	Y	Y	Category 1	
	FVS318G	Lifetime	Y	Y	Category 1	
	FVS336G	Lifetime	Y	Y	Category 1	
	FVS318G	Lifetime	Y	Y	Category 1	
	FVS336G	Lifetime	Y	Y	Category 1	
	SRX5308	Lifetime	Y	Y	Category 1	



CONNECTED HOME PRODUCTS



CONNECT YOUR NETWORK WITH STYLE

Gone are the days of flashing LED lights, tangled cables, and bulky design. With NETGEAR "Lifestyle" 900 series switches, you get a user-friendly switch crafted with your modern home in mind. Their stylish and thoughtful design eliminates the unsightly tangle of cables, distracting lights and fan noise, enabling these new switches to be proudly displayed in full view for all to see.

Their built-in cable organizer and Port LED ON/OFF button keep your environment quiet and clean, and their direct wired Ethernet connects your home to your smart TV, gaming console, streaming video player (Apple TV, Fire TV, Roku, etc.), NAS storage drive, IP camera, and security systems with speed and style.

The GS908E is also a USB charging station. USB ports are conveniently placed on the back of the GS908E to allow you to charge your smartphone and tablet. With 2A support per port you will be able to charge your devices faster than ever. Moreover the 20W maximum power budget and the 10W per port support will assure that you can charge two Tablets or power-hungry devices at the same time.

Discover the industry's first consumer-friendly switch with integrated cable management.



	GS908	GS908E
Typical Use	Home and Business	Home and Business
# of Gigabit Ports	8	8
Cable Management	•	•
Port & Power Port LED On/Off	•	•
USB Charging Ports	0	2
Management	Unmanaged	Mobile Web Optimized Management
Auto-Diagnostic LED		•

[Click here to learn more](#)



ARLO® SECURITY CAMERAS

Every angle covered

Arlo® Smart Home Security Cameras are 100% wire-free, HD, Indoor/Outdoor video cameras for home, business, and remote security and monitoring. Arlo cameras are IP65-certified and weather-resistant to withstand the rain, sun, heat or chill. Motion and sound activate cameras to initiate video recordings to be saved on the cloud. Notifications are sent to your email and smartphone when motion or sound is detected so you'll know what's happening at home while you're away. Check the Arlo app to view live-streaming video or review recordings from the past 7 days for free. Storage upgrades are available whenever needed.

The Arlo family of smart security cameras offer brilliant HD video quality, two-way talk, live streaming, free cloud recording, instant alerts, and other smart features. Wire-free Arlo cameras are powered by a rechargeable battery, giving you plenty of options for placement in or around the house. Night vision automatically switches on in low light to give you visibility in the dark.

The newest addition to the Arlo family is Arlo Pro 2. Arlo Pro 2 is a 100% wire-free, 1080p HD quality security camera that records with sharper details. Highlight activity zones or capture activities 3 seconds before a triggered event, so you'll always know what happened. It can even record non-stop 24/7 when plugged in.



	Arlo Pro2	Arlo Go	Arlo Pro	Arlo
Is it wire-free?	100% wire-free	100% wire-free	100% wire-free	100% wire-free
Video Quality	1080p HD quality	720p HD quality	720p HD quality	720p HD quality
Is it weather-resistant?	Yes	Yes	Yes	Yes
Does it require WiFi?	Yes	No, with a data plan, it works anywhere on AT&T's nationwide high speed network.	Yes	Yes
How is it powered?	Rechargeable battery (with plug-in option)	Rechargeable battery (with plug-in option)	Rechargeable battery (with plug-in option)	Four CR123 batteries
How much storage do I get?	Keep recordings from last 7 days for free + upgrade options			
What alerts do I get?	Motion & Audio	Motion & Audio	Motion & Audio	Motion
Does it support audio?	Yes	Yes	Yes	No
Does it have a wide angle lens?	Yes, 130° field of view	Yes, 130° field of view	Yes, 110° field of view	Yes, 110° field of view
Is there night vision?	Yes	Yes	Yes	Yes
Is there a smart siren?	Yes, in the base station	No	Yes, in the base station	No
Can I upgrade to record non-stop 24/7?	Yes, when the camera is plugged in and used indoors	No	No	No
Does it have local storage?	Yes. Connect a USB drive to the base station for optional local backup storage.	Yes. Micro SD card slot available on the camera.	Yes. Connect a USB drive to the base station for optional local backup storage.	No

[Click here to learn more](#)



NIGHTHAWK®

Advance the way you WiFi

NETGEAR Nighthawk brand is known for the most advanced, high-performance WiFi technology and home networking products of its time. Nighthawk products are full-featured, customizable home networking solutions with advanced utility well beyond just Internet connectivity. Innovation with cutting edge WiFi and networking technology are hallmarks to NETGEAR Nighthawk.

From the world's fastest WiFi routers and mobile routers, to next generation WiFi range extenders, cable and DSL modem routers, WiFi adapters and network switches, Nighthawk products stand out on speed, performance,

and reliability. Using the fastest dual and quad-core processors available, Nighthawk breaks network speed barriers with innovative WiFi technology and wired connectivity. The Nighthawk WiFi routers and extenders offer reliable coverage throughout very large homes with the capability to support the latest connected devices for the smart home.

Nighthawk WiFi products' iconic looks, powerful antennas and elegant LED displays have won internationally recognized awards for excellence in product design.

Advanced features
The fastest available 802.11ac and 802.11ad WiFi speeds
High-end processors for optimized performance
Feature-rich products with technologies such as Dynamic QoS, Beamforming+, FastLane, VPN, and Smart Connect
Gigabit Ethernet ports for faster file sharing and transfers
Port aggregation to improve the aggregated file transfer speed
USB 3.0 ports for backup and easy access to your stored media
High-performance antennas for better WiFi coverage and faster speeds
Nighthawk solutions are the most customizable home networking solutions with advanced utility well beyond just Internet connectivity. The latest software integrations include:
PLEX integration
ReadySHARE USB
ReadySHARE Vault
Circle with Disney Smart Parental Controls
Voice Control using Amazon Alexa and the Google Assistant
Kwilt for photo sharing

[Click here to learn more](#)



ORBI™ WHOLE HOME MESH WIFI SYSTEMS

Enjoy one WiFi name and seamless roaming for your entire home.
Better WiFi. Everywhere.

Orbi WiFi Systems are designed for a broad range of home environments, from apartments and lofts to single family homes and sprawling estates. Orbi WiFi Systems come with an Orbi WiFi Router and Satellite to deliver unparalleled WiFi coverage throughout your whole home, even in your basement or backyard. Innovative Tri-band WiFi ensures you enjoy the top Internet speeds you pay for everywhere in your home.

Orbi WiFi Systems deliver industry-leading 802.11ac AC3000 and AC2200 WiFi speeds with reliable whole home coverage, so you can enjoy seamless WiFi everywhere in your home and around your property with Orbi Outdoor satellite, without dead zones – from the attic to the basement, patio to garage, front yard to back garden — even while streaming 4K HD video content or other bandwidth-gobbling multimedia.

Four gigabit Ethernet ports on the Router and the Satellite can be used to connect to printers, network-attached storage drives, game consoles etc.

Daisy Chain your Orbi add-on Satellites to dynamically pick the best way to connect to the Router and extend the coverage of your Orbi WiFi System range. Satellites extend WiFi signals and maintain one network name (SSID) for the entire network. Additional wall plug form factor for Orbi provides more choice of style and flexibility of placement in common areas such as hallways and kitchens.

Easily setup separate and secure Internet access for guests. Orbi works with Amazon Alexa and the Google Assistant so you can control your home network using voice commands. Installation is a breeze, use the Orbi app to setup your whole home mesh WiFi in minutes.

[Click here to learn more](#)

AWARD-WINNING HOME NETWORKING PRODUCTS



Nighthawk Pro Gaming Switches

The NETGEAR Nighthawk Pro Gaming Ethernet switches are versatile, ultra-performance, easily configurable network switches designed for expert gaming, 4K UHD media streaming, and home network connectivity.

Their sleek and modern design make them the perfect for any modern home or small office. The Nighthawk Switches bring low latency, traffic and port prioritization, and Quality of Service (QoS) management at the click of a button for ultra-high performance in high-demanding online/VR gaming and media streaming.

[Click here to learn more](#)



Mobile Routers (Portable WiFi)

Get fast streaming with advanced mobile WiFi. NETGEAR Mobile Routers elevate the mobile WiFi experience for your business and your teams. Fast speed for downloading, streaming and media sharing - everything you do at the office, can now be done virtually anywhere you go. Mobile Routers offer fast download speeds, dual concurrent WiFi bands, a long lasting battery, and simply a powerful mobile WiFi performance that you cannot find from other mobile hotspot devices.

[Click here to learn more](#)



Cable Modems

With the latest NETGEAR cable modems, get the fastest Internet speeds cable providers are offering. One of the latest in the family is CM1000 DOCSIS® 3.1 cable modem, which is the world's first retail DOCSIS 3.1 Cable Modem certified for XFINITY® by Comcast. This new Cable technology delights consumers with gigabit Internet speeds.

[Click here to learn more](#)



DSL Modems and Modem Routers

NETGEAR offers a wide range of innovative DSL modem and modem routers. More homes now have multiple devices requiring strong, steady WiFi signals. NETGEAR DSL modems and modem routers are compatible with DSL service providers to meet every type of home networking need.

[Click here to learn more](#)



NIGHTHAWK[®]

PRO GAMING



XR500 Gaming
WiFi Router



SX10 10-port Switch

Power to Win.

Click [here](#) to learn more