

## Introduction

Htek IP phone supports a USB button that connects to the USB port of the IP phone to implement various configuration functions.

Compatible with: UC926U, UC924U, UC924W, UC923U, UC921U


Features available: Speed Dial, Voice Mail, Direct Pickup, Group Pickup, Intercom, Prefix, Local Group, XML Group, XML Browser, LDAP, Network Directories, Forward, DND, Redial, Call Return, SMS, Record, Multicast Paging, Silent Call

## USB Key Mode

**Normal mode:** The USB button UB10 performs the corresponding functions that you set and it will perform the same as the DSS key.

**Emergency mode:** The functions in emergency mode have the highest priority. When UB10 is pressed, IP phone will immediately stop other functions, and the USB Button function you set will be performed first. When IP phone is ringing, in a call, dialing or holding, the phone will return to idle state and perform the USB Button function.

## Connecting to the IP Phone

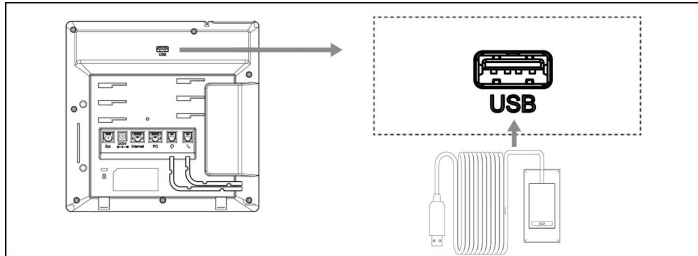


- 1.Plug the USB Button into the USB port on the back (or side) of the IP phone.
2. After the connection is successful, the following message is displayed on the LCD screen: "USB Button is connected!"

## Configuration via web interface

- 1.Login: Input the IP address in the web browser. The PC and phone should be in the same IP address segment (Login name: admin; default password: admin).
- 2.Click **Setting** → **Function keys**→**USB KEY**
- 3.Choose USB key mode and type
- 4.Fill in the value and label (optional)
- 5.Click **SaveSet**

# IP Phone

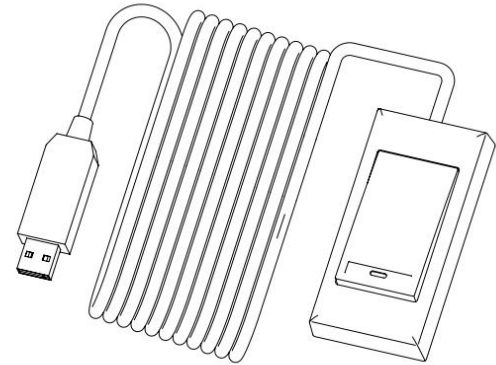

## UB10 User Guide

Tel: 0086-25-84658050 | Fax: 0086-25-84658319

Mail: support@htek.com | Web: www.htek.com

Add: 5th Floor, Building No.1, Huashen TechPark, No.10 Huashenmiao, Yuhuatai District, Nanjing, 210012, China

Copyright: ©2023 NANJING HANLONG TECHNOLOGY CO., LTD. All rights reserved.