



MAXHUB XCore Room Kit for Microsoft Teams Rooms

Model: XT10-VB Kit


MAXHUB XT10-VB Kit showcases its versatility with the addition of an exceptional Videobar. Designed with simplified front-line one-cable deployment and remarkable expandability, this bundle effortlessly accommodates the evolving needs of multiple devices. Compatible with Microsoft Teams Rooms, the Kit also helps to facilitate the switch to Microsoft Teams Rooms smart spaces for BYOD scenarios, enhancing Teams-native audio and video experiences while accommodating cost-balance needs.

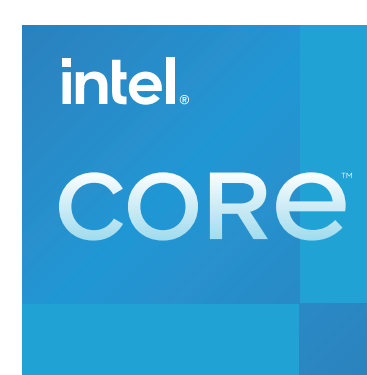


One Cable Technology



Device Management



Flexible & Ease of Installation



Easy Content Sharing



3-Year Warranty & Local support



Secured and Managed

Product Specification	
Type	Mini-PC
CPU	Intel i3-1220P TDP: 28W
Memory	8GB DDR4 3200MHz
Optional hard disk	128GB SATA SSD (M.2-2280 SATA3 up to 6Gb/s)
Graphics	Intel® UHD Graphics for 12th Gen Intel® Processors;
Chipset	ADL PCH-P
Sound Card	USB Audio, HS-100B, Cmedia
Network	1000Mbps RJ45
Operating system	Windows 11 IoT Enterprise SAC

Certifications	
Certifications	Microsoft Teams Rooms

I/O Port	
USB-A 3.0	4
LAN	1
USB-C (For Teams Rooms Console)	1
HDMI OUT	1
Audio OUT	1
AC POWER	1
Kensington lock slot	1

Power	
Power Supply Mode	AC POWER
Power Requirements	100-240V AC 50/60Hz
Max Power	90W

Accessories (included in the package)	
Wall Bracket	×1
PC Bracket	×1
Cable Cover Screw	×2
Machine Screw	×4
Expansion Screw	×4
Self-tapping Screw	×4
Cable Cover	×1
HDMI Cable (1.8m/5.9ft)	×1
Power Cord (1.8m/5.9ft)	×1
Quick Start Guide	×1

Physical Specifications	
Dimension L × W × H	230mm × 185mm × 41.5mm / 9.06" x 7.28" x 1.63"
Dimension (package) L × W × H	342 × 246 × 146mm / 13.46" x 9.69" x 5.75"
Net Weigh	1.36kg / 3lbs
Gross Weight	4.36kg / 9.6lbs

Environmental Conditions	
Operation Temperature	0°C-40°C / 0°F-104°F
Operation Humidity	10%-90%RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%-90%RH
Altitude	Below 5000m/196850"

Display	
Size	10.1 inch
Resolution	1920 (H) x 1200 (V)
Frequency Refresh Rate	60Hz
NTSC	Min.62%, Typ.65%
Back Light Unit	ELED
Brightness with glass	Min.250cd/m², Typ.300cd/m²
Life Time	≥ 20000 Hours

Touch System	
Type	Capacitive touch
Touch Tool	Finger
Accuracy	± 2mm / 0.08"
Touch Point	10 points touch
Minimum object size	6mm / 0.24"

I/O Port	
HDMI INGEST (SCREEN SHARE)	1
USB-A (USB PERIPHERAL)	1
USB-C (TO PC)	1
3.5mm (AUDIO OUT)	1

Physical Specifications	
Dimension L×H×D	245 × 164.3 × 77.4mm / 9.65" x 6.47" x 3.05"
Dimension (package) L×W×H	332 × 246 × 166mm / 13.07" x 9.69" x 6.54"
Net Weight	880g / 1.94lbs
Gross Weight	2.38kg / 5.25lbs

Accessories (included in the package)	
USB Type-C Cable (Type C-C) 5m / 16.4ft	×1
HDMI Cable 1.8m / 5.9ft	×1
Quick Start Guide	×1

Power	
Power Requirements	15V 3A (Type-C PD)
Overall Power (Max.)	20W
Standby Power	≤ 0.5W

Environmental Conditions	
Operation Temperature	0°C-40°C / 0°F-104°F
Operation Humidity	10%~90%RH
Storage Temperature	-20°C-60°C / -4°F-140°F
Storage Humidity	10%~90%RH
Altitude	Below 5000m/ 196850"

Camera				Audio	
Pixel				12MP	
Sensor				1/2.3-inch 12MP Sony sensor	
Resolution and Frame Rate					
H.264/MJPEG	(1) 3840 x 2160	(2) 2560 x 1440	(3) 1920 x 1080		
	(4) 1280 x 720	(5) 1024 x 576	(6) 960 x 540		
	(7) 800 x 600	(8) 640 x 480	(9) 640 x 360		
	(10) 480 x 270	(11) 352 x 288	(12) 320 x 240		
YUY2	(1) 640 x 480	(2) 640 x 360	(3) 480 x 270		
	(4) 352 x 288	(5) 320 x 240	(6) 320 x 180		
	(7) 160 x 120				
ZOOM		5x Digital Zoom			
Output Format		MJPEG; YUY2; H.264			
Field Of View		120° (D)			
Adjustable Angle		± 15° (V)			
Focus Mode		Fixed-Focus			
Focus Distance		1m/39.4"			
Special Features	Auto Framing: automatic adjustment FOV to fit in all participants				
	Speaker Tracking: voice triggered people tracking				
	10 Zooming Pre-sets for instant setting up				
Power					
Power Requirements		12V			
Overall Power(Max.)		10W			
PoE Power		Yes (IEEE 802.3af or 802.3at)			
System Requirements					
Supports Windows XP/7/8.1/10/11, Android 8.1 or higher, and MAC OS 10.12 or higher					
Application Supported					
MAXHUB Align software for Windows & Mac OS					
PIR Sensor					
In power-on mode, it will automatically enter standby state If no moving object is detected within 3 meters within 30 minutes, minimizing energy consumption; In standby mode, it automatically starts up when detecting moving objects within 3 meters, simplifying the setup process.					
Mount					
Wall-mounted					
TV mount kit (Optional)					
Physical Specifications					
Dimension(Lx Hx D)		462 x 76 x 93 mm (18.2 x 3.0 x 3.7 inch)			
Dimension(package)(Lx Hx D)	1pcs 538 x 160 x 169 mm (21.2 x 6.3 x 6.7 inch)				
	4pcs 628 x 433 x 380 mm (24.7 x 17.0 x 15.0 inch)				
Net Weight		1.05Kg/2.31lbs			
Gross Weight	1pcs 2.55kg/5.62lbs				
	4pcs 12.00kg/26.46lbs				
Environmental Condition					
Operation Temperature		0°C - 40°C			
Operation Humidity		10% - 90%RH			
Storage Temperature		-20°C - 60°C			
Storage Humidity		10% - 90%RH			
Altitude		Below 5000m/196850"			
Warranty					
3 Year hot swap		Accessories one year			
What's In The Box					
included	1 x USB Cable (1.8m/70.9 inch), 1 x Remote Control				
	1 x Power Adapter, 1 x Wall-mounted Components, 1 x Peeping Cover				


XCore Kit Package Includes

- XC13T Mini-PC x1
- TCP20T Touch Control Panel x1
- UC S07 x1

Package Physical Specifications

- Dimension (package) L×W×H 705x440x265mm / 27.76"x17.32"x10.43"
- Net Weight 9.068kg/19.99lbs
- Gross Weight 11.49kg/25.33lbs

Connection

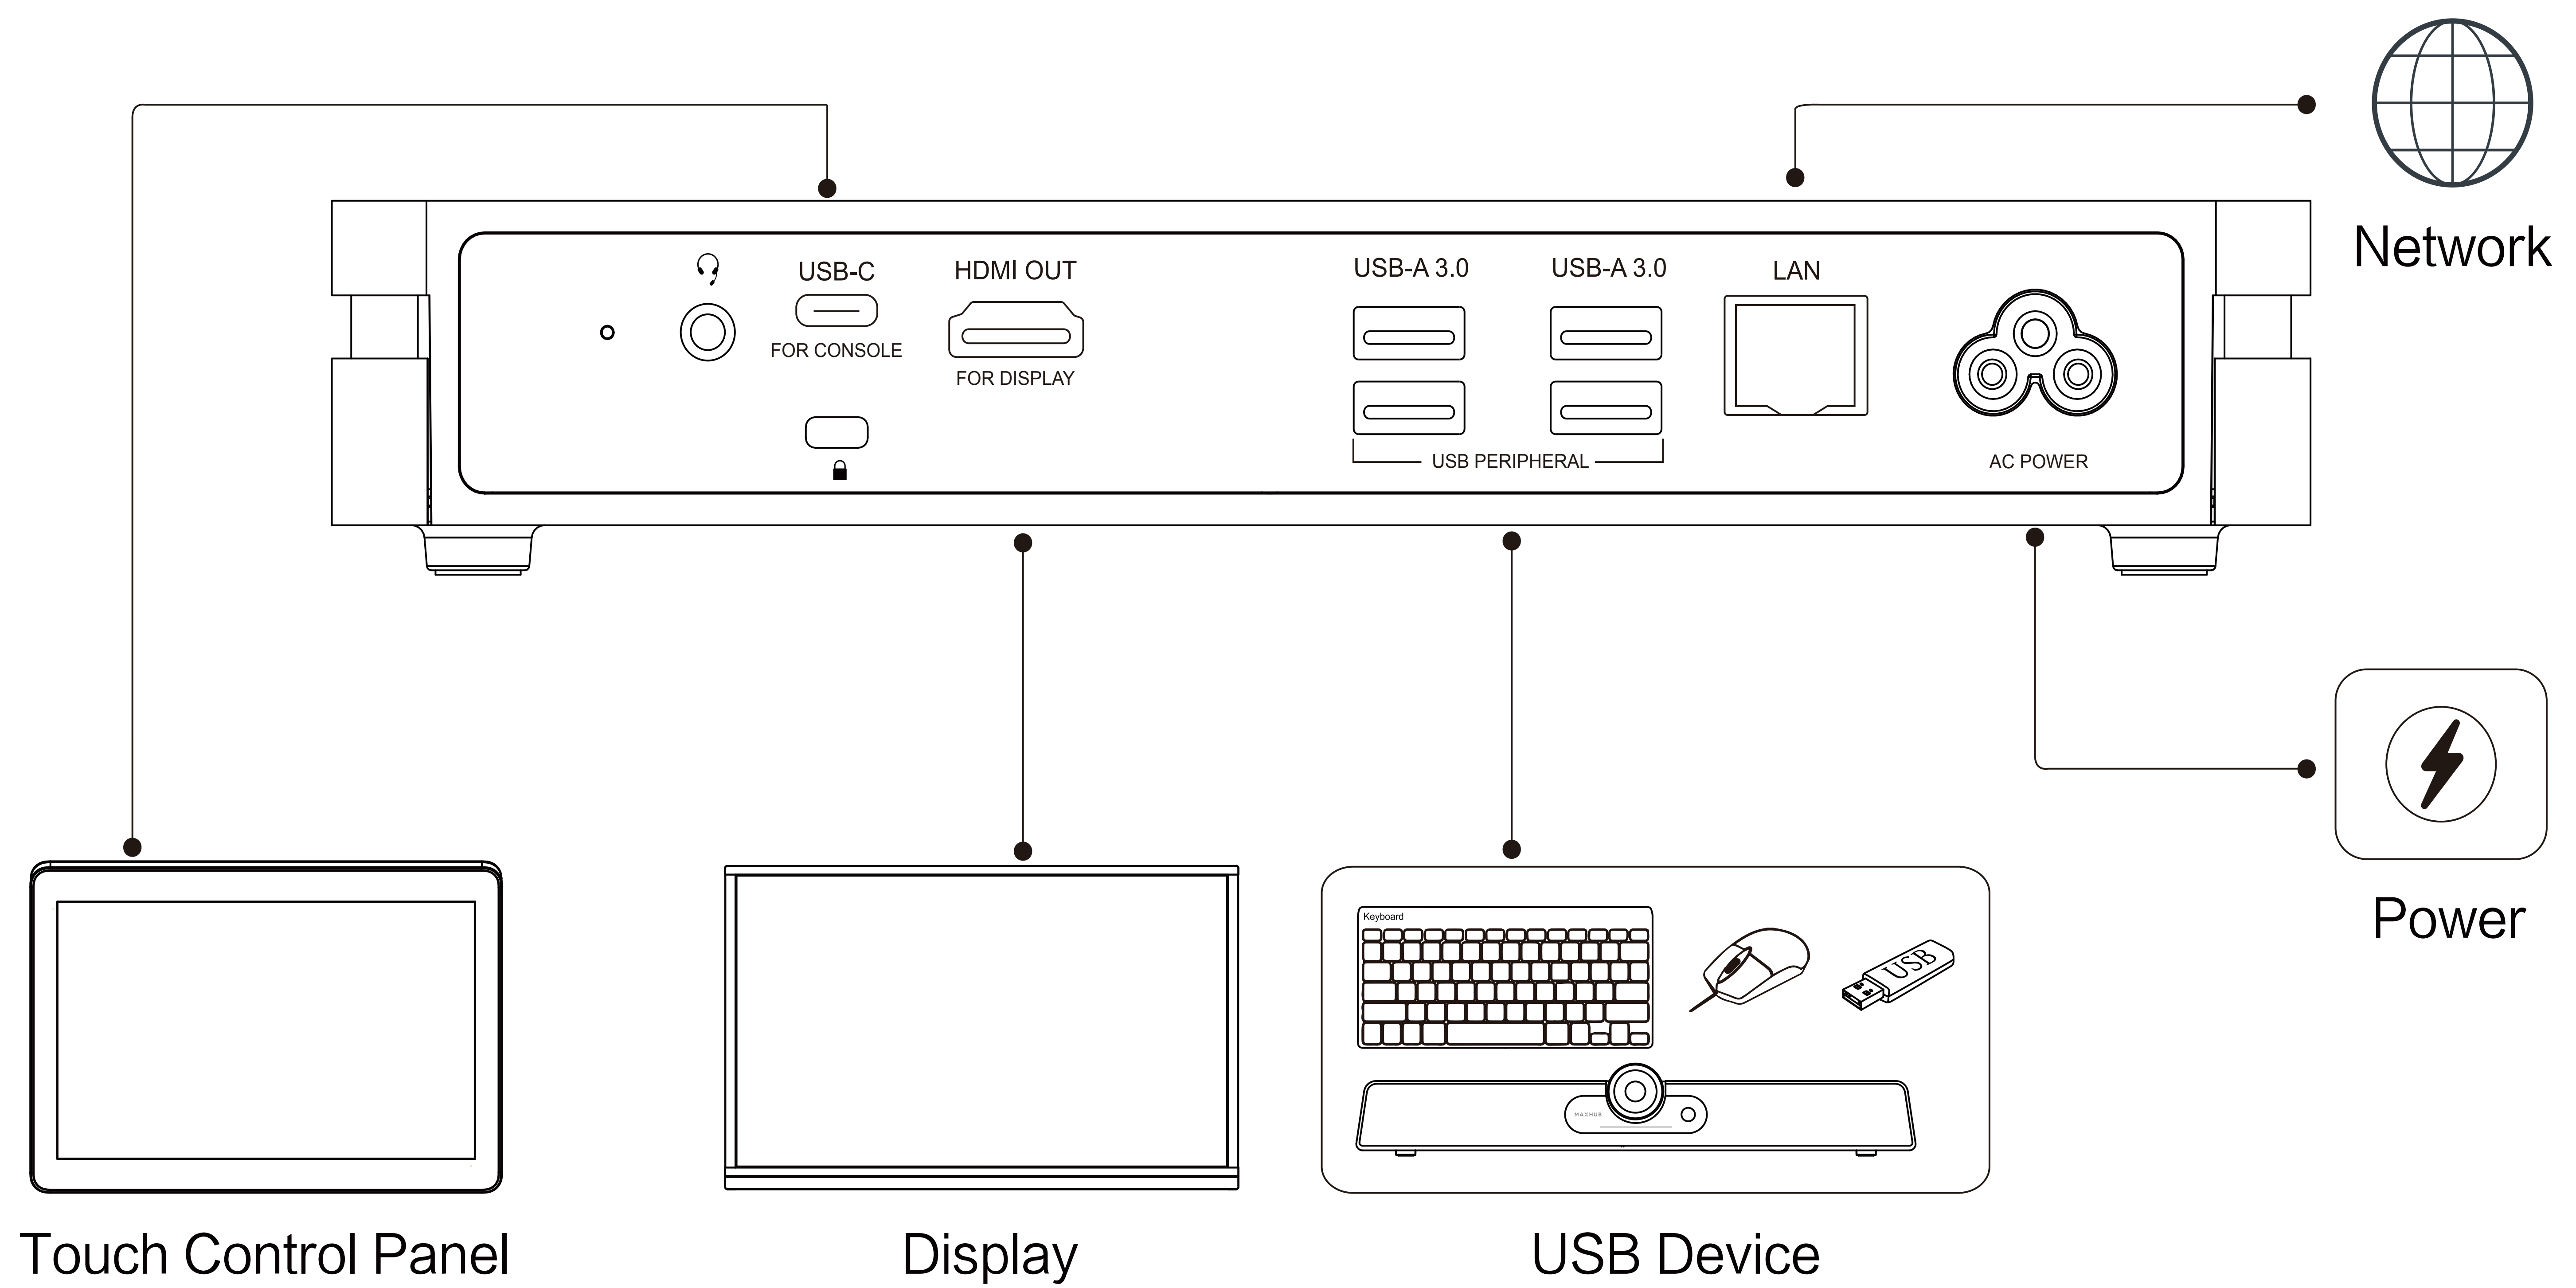

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.