



1. Remove the screws that lock the stand on the rear case. (4pcs)

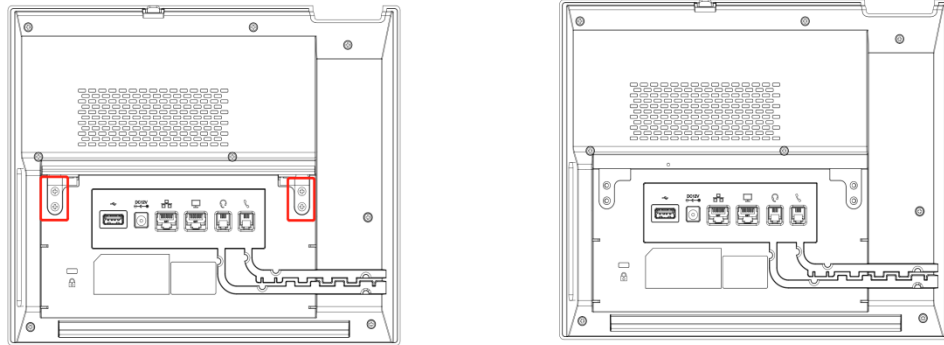

2. Insert the wall mount bracket into the rear housing slot (where the bracket spindle was originally fitted)

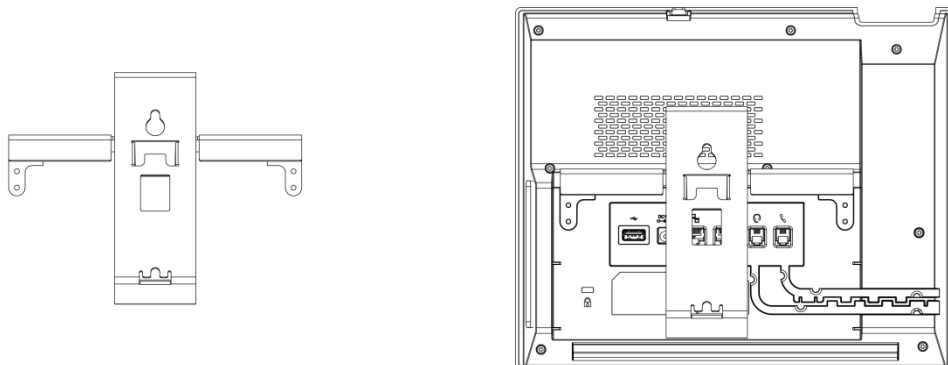

3. Locking screws fixing (use screws removed in step 1)

